

CprE 281: Digital Logic

Instructor: Alexander Stoytchev

<http://www.ece.iastate.edu/~alexs/classes/>

Binary Numbers

*CprE 281: Digital Logic
Iowa State University, Ames, IA
Copyright © Alexander Stoytchev*

Administrative Stuff

This is the official class web page:


http://www.ece.iastate.edu/~alexs/classes/2023_Fall_281/

If you missed the first lecture, the syllabus and other class materials are posted there.


Administrative Stuff

- **HW1 is out**
- **It is due on Monday Aug 28 @ 10 pm.**
- **Submit it on Canvas before the start of the lecture**

Did you get the textbook?

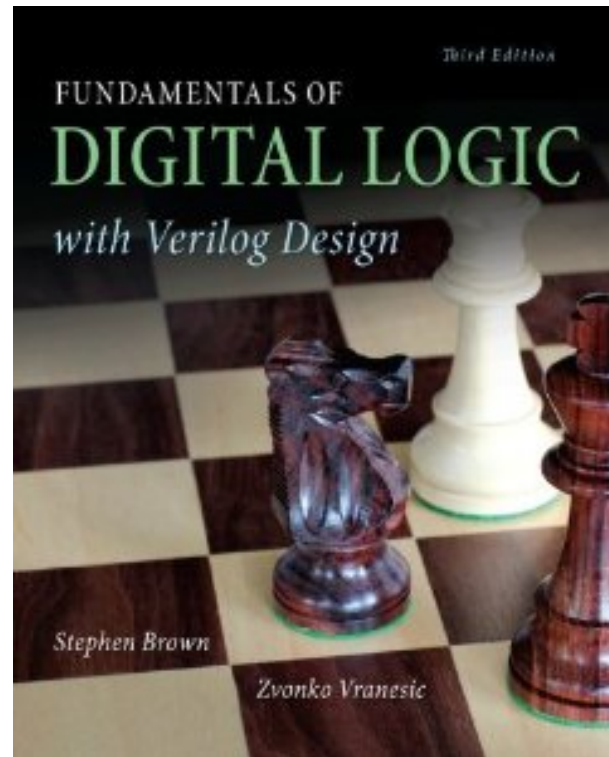

Required Textbook

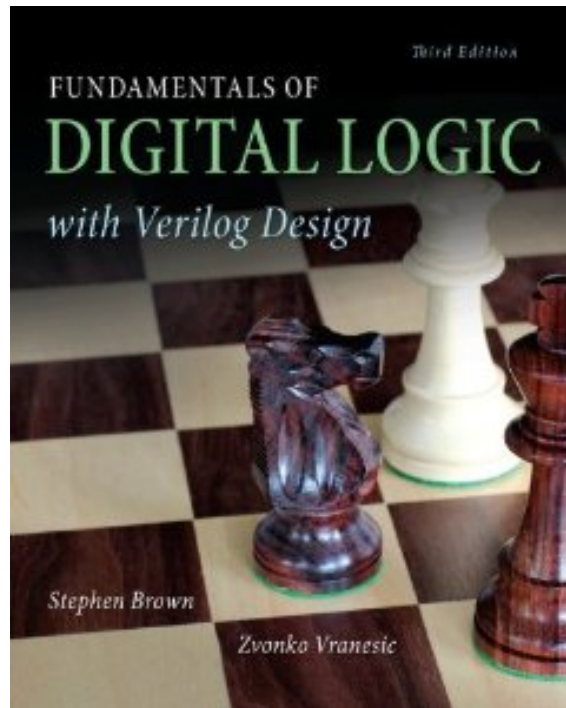

Title: Fundamentals of Digital Logic with Verilog Design [3-rd edition]


Author: Stephen Brown and Zvonko Vranesic

Edition: Copyright 2013, 3-rd edition

ISBN: 978-0073380544

Publisher: McGraw-Hill

Required Textbook

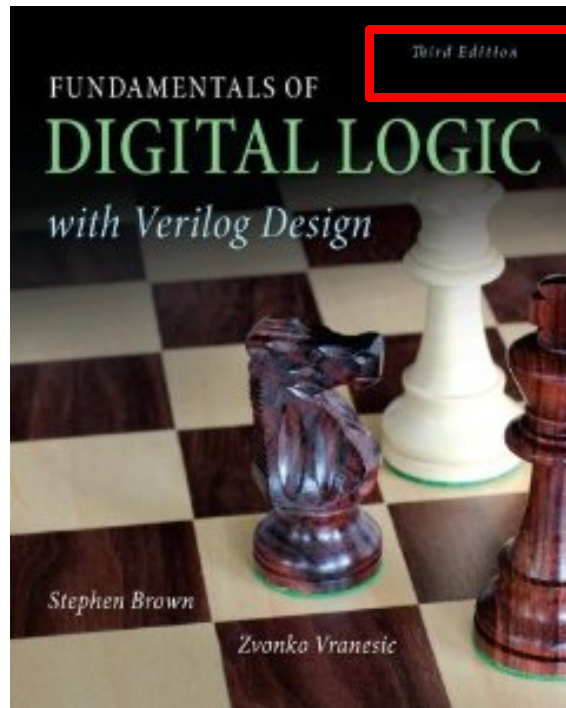

Title: **Fundamentals of Digital Logic with Verilog Design** [3-rd edition]


Author: **Stephen Brown and Zvonko Vranesic**

Edition: **Copyright 2013, 3-rd edition**

ISBN: **978-0073380544**

Publisher: **McGraw-Hill**

Required Textbook

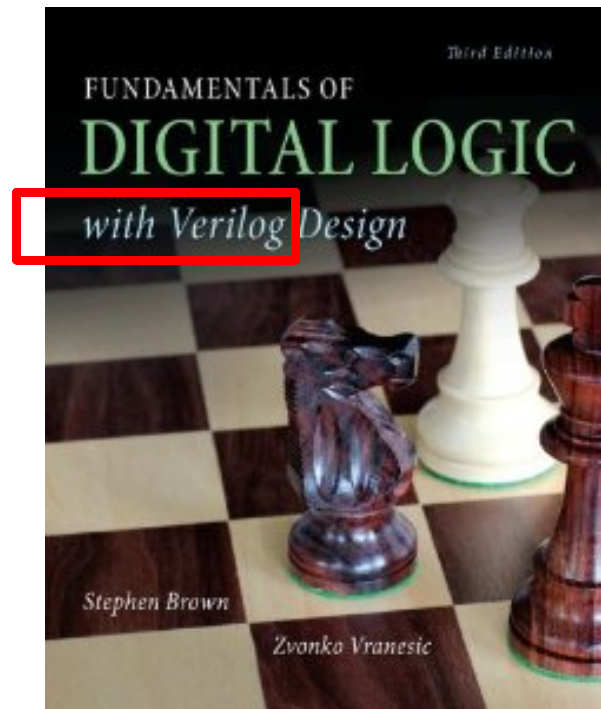

Title: **Fundamentals of Digital Logic with Verilog Design [3-rd edition]**

Author: **Stephen Brown and Zvonko Vranesic**

Edition: **Copyright 2013, 3-rd edition**

ISBN: **978-0073380544**

Publisher: **McGraw-Hill**

Where is the eBook?

IOWA STATE

Account

Dashboard

Courses

Calendar

Inbox

History

Studio

Help

F2022-CPR E-281 > Immediate Access Course Materials

Fall 2022

IOWA STATE UNIVERSITY

Home

Syllabus Statements

Syllabus

Assignments

Discussions

Files

Grades

People

Immediate Access Course Materials

1 Course, 0 Materials

CprE 281

Item Info **Notes**

Fundamentals of Digital Logic with Verilog Design

ISBN: 0077575938 By: Brown, Stephen; Vranesic, Zv...

Opted In Immediate Access

Required

The last day to opt out is 09/02/2022.

Want to opt-out?

Read Now

**In Canvas,
click here**

Where is the eBook?

IOWA STATE

Account

Dashboard

Courses

Calendar

Inbox

History

Studio

Help


F2022-CPR E-281 > Immediate Access Course Materials

- Fall 2022
- Home
- Syllabus Statements
- Syllabus
- Assignments
- Discussions
- Files
- Grades
- People
- Immediate Access Course Materials**

IOWA STATE UNIVERSITY


1 Course, 0 Materials

CprE 281

Item Info	Notes
	Fundamentals of Digital Logic with Verilog Design ISBN: 0077575938 By: Brown, Stephen; Vranesic, Zv...
<input checked="" type="checkbox"/> Opted In	<input type="button" value="Immediate Access"/>
Required	
🕒 The last day to opt out is 09/02/2022.	
<input type="button" value="Want to opt-out?"/>	
<input type="button" value="Read Now"/>	

Then click here

Where is the eBook?

	Fundamentals of Digital Logic with Verilog Design ... Brown, Stephen; Vranesic, Zvonko
Expand Collapse	
▼ Chapter 3 Number Representation and Arithmetic Circuits	121
▼ Chapter 4 Combinational-Circuit Building Blocks	189
▼ Chapter 5 Flip-Flops, Registers, and Counters	247
▼ Chapter 6 Synchronous Sequential Circuits	331
▼ Chapter 7 Digital System Design	421
▼ Chapter 8 Optimized Implementation of Logic Functions	491
▼ Chapter 9 Asynchronous Sequential Circuits	551

chapter 5

FLIP-FLOPS, REGISTERS, AND COUNTERS

CHAPTER OBJECTIVES

In this chapter you will learn about:

- Logic circuits that can store information
- Flip-flops, which store a single bit
- Registers, which store multiple bits
- Shift registers, which shift the contents of the register
- Counters of various types
- Verilog constructs used to implement storage elements

Administrative Stuff

The labs and recitations start next week:

Section 6: Wednesday 7:45 AM - 10:35 AM (Coover Hall, room 2042)

Section 7: Thursday 5:10 PM - 8:00 PM (Coover Hall, room 2042)

Section 8: Thursday 2:10 PM - 5:00 PM (Coover Hall, room 2042)

Section 9: Tuesday 2:10 PM - 5:00 PM (Coover Hall, room 2042)

Section 10: Thursday 11:00 AM - 1:50 PM (Coover Hall, room 2042)

Section 11: Wednesday 6:10 PM - 9:00 PM (Coover Hall, room 2042)

Section 12: Wednesday 11:00 AM - 1:50 PM (Coover Hall, room 2042)

Section 14: Thursday 8:00 AM - 10:50 AM (Coover Hall, room 2042)

Section 16: Thursday 11:00 AM - 1:50 PM (Coover Hall, room 1318)

- **The lab schedule is also posted on the class web page**

The Labs Start Next Week

- Please download and read the lab assignment for next week before you go to your lab section.
- You must print the answer sheet for each lab ahead of time.
- Then answer the pre-lab questions before the start of the lab.
- The TAs will check your answers at the beginning of the lab.

Grading Scale

95 - 100	= A
90 - 94	= A-
87 - 89	= B+
83 - 86	= B
80 - 82	= B-
77 - 79	= C+
73 - 76	= C
70 - 72	= C-
67 - 69	= D+
63 - 66	= D
60 - 62	= D-
0 - 59	= F

Grading Percentages

Homeworks: (12 x 2.0%)	24%
Labs: (12 x 1.5%)	18%
Mini Project:	3%
Midterm Exam 1:	15%
Midterm Exam 2:	15%
Final Exam:	25%
=====	
TOTAL:	100%

The Labs Start Next Week


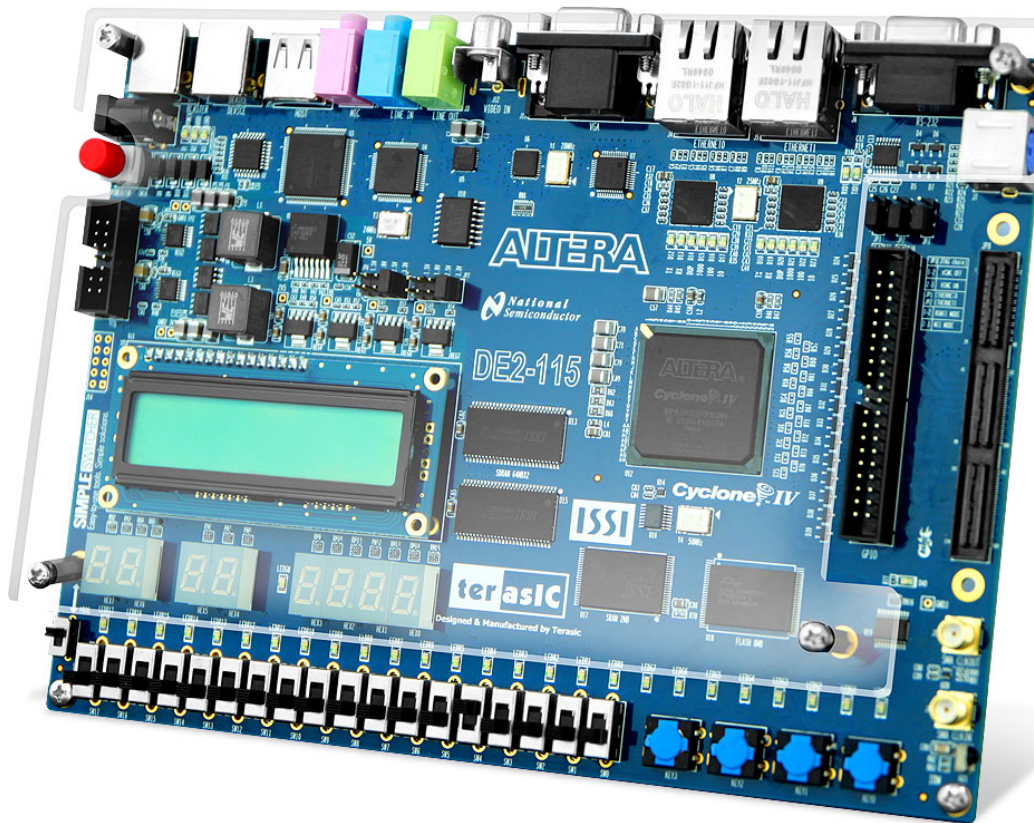


Figure 1.5 in the textbook: An FPGA board.

The Decimal System



The Decimal System

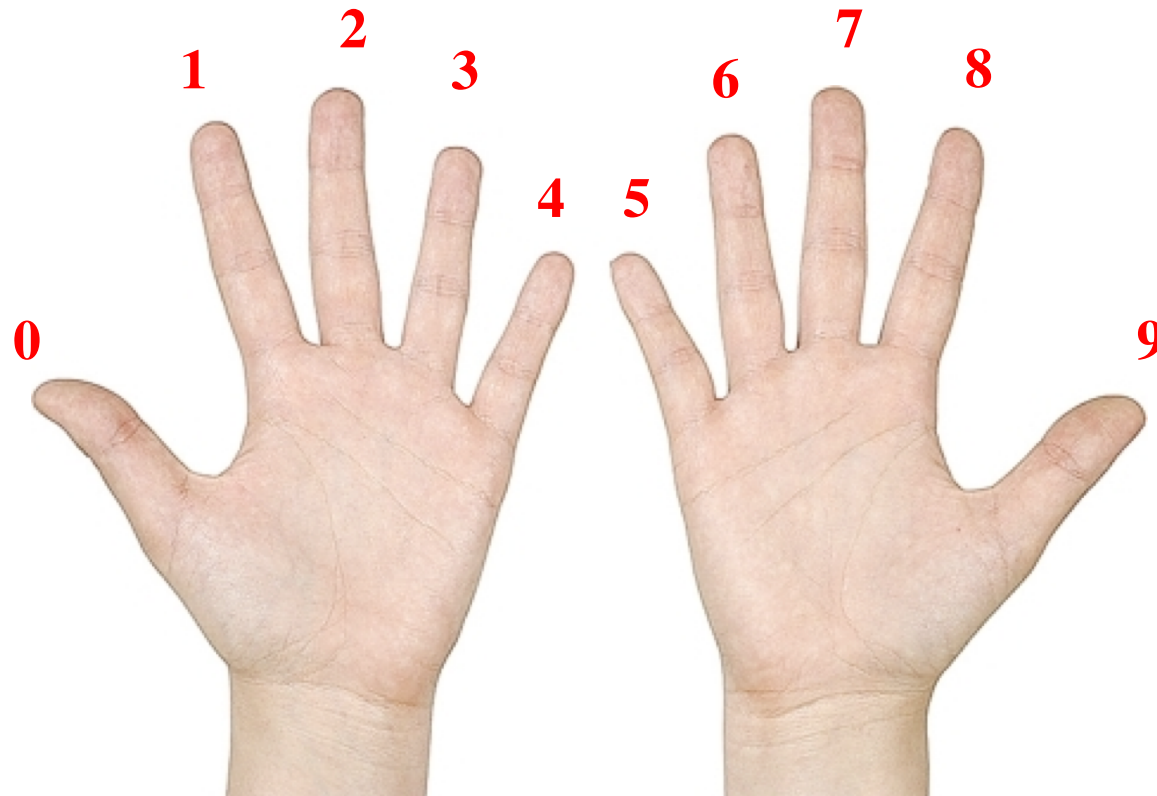

What number system is this one?



[http://freedomhygiene.com/wp-content/themes/branfordmagazine/images/backgrounds/Hands_141756.jpg]

The Binary System



[<http://divaprojections.blogspot.com/2011/11/alien.html>]

The Binary System




Number Systems


$$N = d_n B^n + d_{n-1} B^{n-1} + \dots + d_1 B^1 + d_0 B^0$$

Number Systems

$$N = d_n B^n + d_{n-1} B^{n-1} + \dots + d_1 B^1 + d_0 B^0$$



n-th digit
(most significant)



0-th digit
(least significant)

Number Systems

The diagram shows the expansion of a number N in base B . The formula is $N = d_n B^n + d_{n-1} B^{n-1} + \dots + d_1 B^1 + d_0 B^0$. Red arrows point from the labels 'base' and 'power' to the B and the exponent n in the first term, respectively. Another red arrow points from the label 'n-th digit (most significant)' to the digit d_n . A fourth red arrow points from the label '0-th digit (least significant)' to the digit d_0 .

base

power

$$N = d_n B^n + d_{n-1} B^{n-1} + \dots + d_1 B^1 + d_0 B^0$$

n-th digit
(most significant)

0-th digit
(least significant)

The Decimal System

$$524_{10} = 5 \times 10^2 + 2 \times 10^1 + 4 \times 10^0$$

The Decimal System

$$\begin{aligned} 524_{10} &= 5 \times 10^2 + 2 \times 10^1 + 4 \times 10^0 \\ &= 5 \times 100 + 2 \times 10 + 4 \times 1 \\ &= 500 + 20 + 4 \\ &= 524_{10} \end{aligned}$$


Another Way to Look at This

5	2	4
---	---	---

Another Way to Look at This

	10^2	10^1	10^0
5	2	4	

Another Way to Look at This

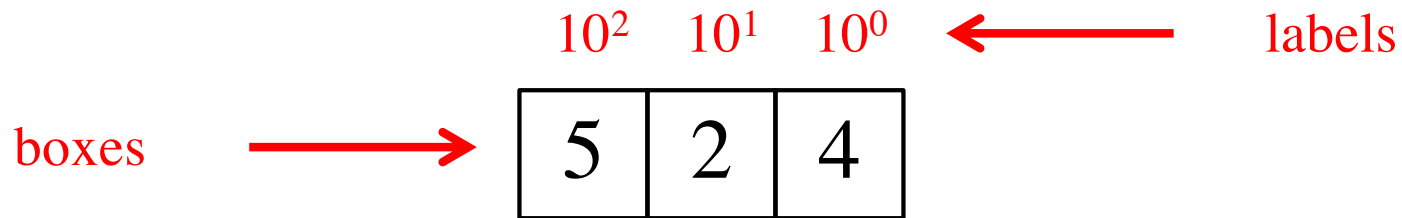

Each box can contain only one digit and has only one label. From right to left, the labels are increasing powers of the base, starting from 0.

Base 7

$$524_7 = 5 \times 7^2 + 2 \times 7^1 + 4 \times 7^0$$

Base 7

$$524_7 = 5 \times 7^2 + 2 \times 7^1 + 4 \times 7^0$$

base

power

most significant digit

least significant digit

Base 7

$$\begin{aligned} 524_7 &= 5 \times 7^2 + 2 \times 7^1 + 4 \times 7^0 \\ &= 5 \times 49 + 2 \times 7 + 4 \times 1 \\ &= 245 + 14 + 4 \\ &= 263_{10} \end{aligned}$$

Another Way to Look at This

$$\begin{array}{|c|c|c|} \hline 5 & 2 & 4 \\ \hline \end{array} \quad = \quad \begin{array}{|c|c|c|} \hline 2 & 6 & 3 \\ \hline \end{array}$$

The diagram shows two base-7 numbers being equated to two base-10 numbers. The first number is $5 \cdot 7^2 + 2 \cdot 7^1 + 4 \cdot 7^0$ and the second is $2 \cdot 10^2 + 6 \cdot 10^1 + 3 \cdot 10^0$.

Binary Numbers (Base 2)

$$1001_2 = 1 \times 2^3 + 0 \times 2^2 + 0 \times 2^1 + 1 \times 2^0$$

Binary Numbers (Base 2)

base power

$$1001_2 = 1 \times 2^3 + 0 \times 2^2 + 0 \times 2^1 + 1 \times 2^0$$

most significant bit least significant bit

Binary Numbers (Base 2)

$$\begin{aligned} 1001_2 &= 1 \times 2^3 + 0 \times 2^2 + 0 \times 2^1 + 1 \times 2^0 = \\ &= 1 \times 8 + 0 \times 4 + 0 \times 2 + 1 \times 1 = \\ &= 8 + 0 + 0 + 1 = \\ &= 9_{10} \end{aligned}$$

Another Example

$$\begin{aligned} 11101_2 &= 1 \times 2^4 + 1 \times 2^3 + 1 \times 2^2 + 0 \times 2^1 + 1 \times 2^0 = \\ &= 1 \times 16 + 1 \times 8 + 1 \times 4 + 0 \times 2 + 1 \times 1 = \\ &= 16 + 8 + 4 + 0 + 1 = 29_{10} \end{aligned}$$

Powers of 2

$$2^{10} = 1024$$

$$2^9 = 512$$

$$2^8 = 256$$

$$2^7 = 128$$

$$2^6 = 64$$

$$2^5 = 32$$

$$2^4 = 16$$

$$2^3 = 8$$

$$2^2 = 4$$

$$2^1 = 2$$

$$2^0 = 1$$

What is the value of this binary number?

- **0 0 1 0 1 1 0 0**
- **0 0 1 0 1 1 0 0**
- **$0*2^7 + 0*2^6 + 1*2^5 + 0*2^4 + 1*2^3 + 1*2^2 + 0*2^1 + 0*2^0$**
- **$0*128 + 0*64 + 1*32 + 0*16 + 1*8 + 1*4 + 0*2 + 0*1$**
- **$0*128 + 0*64 + 1*32 + 0*16 + 1*8 + 1*4 + 0*2 + 0*1$**
- **$32 + 8 + 4 = 44$ (in decimal)**

Another Way to Look at This

2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
0	0	1	0	1	1	0	0


Some Terminology

- A binary digit is called a *bit*
- A group of eight bits is called a byte
- One bit can represent only two possible states, which are denoted with 1 and 0


Relationship Between a Byte and a Bit

1	0	1	0	1	1	1	0
---	---	---	---	---	---	---	---

Relationship Between a Byte and a Bit

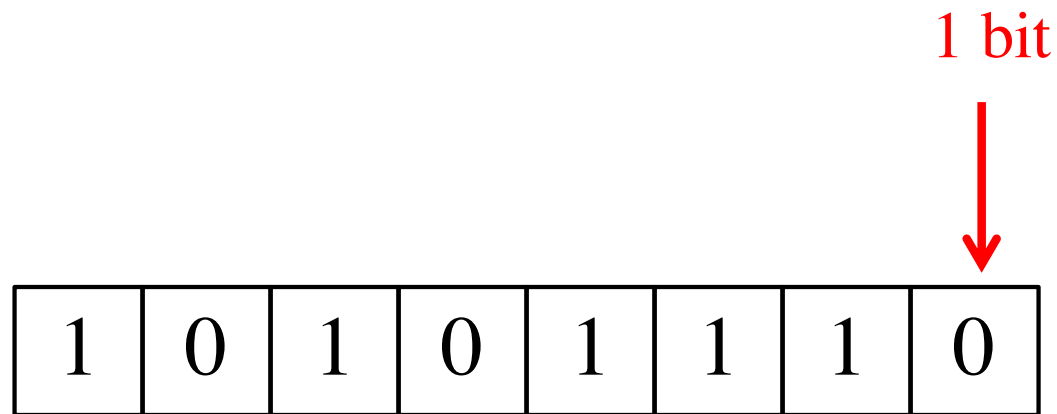

Relationship Between a Byte and a Bit

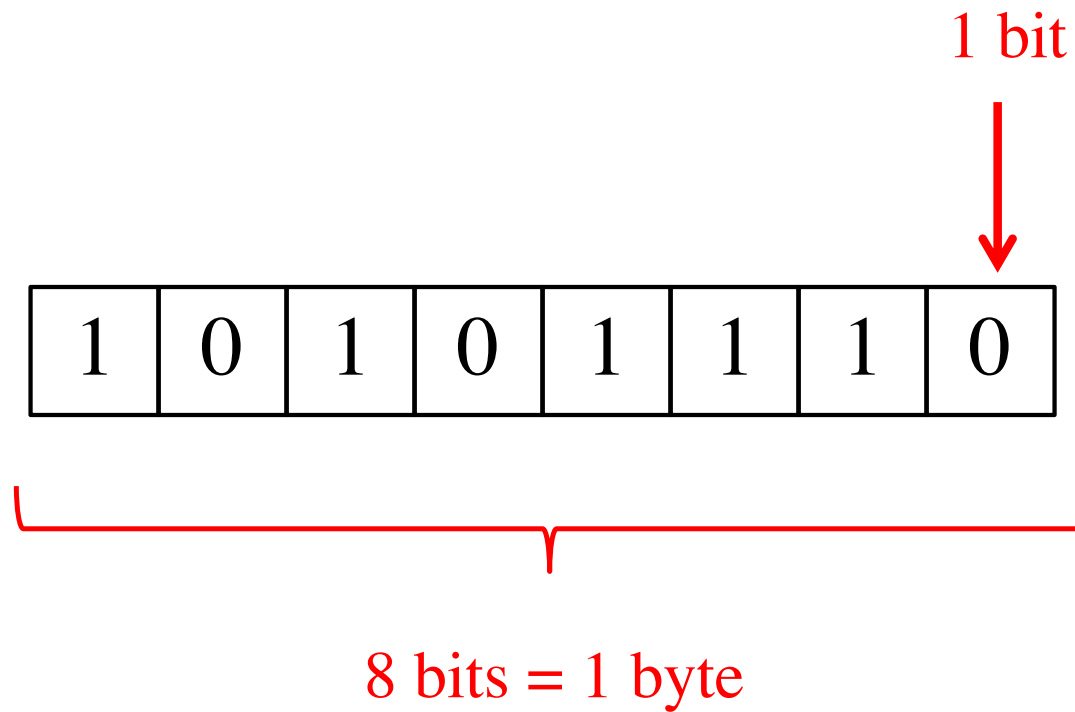

Bit Permutations


<u>1 bit</u>	<u>2 bits</u>	<u>3 bits</u>	<u>4 bits</u>	
0	00	000	0000	1000
1	01	001	0001	1001
	10	010	0010	1010
	11	011	0011	1011
		100	0100	1100
		101	0101	1101
		110	0110	1110
		111	0111	1111

Each additional bit doubles the number of possible permutations

Bit Permutations

- Each permutation can represent a particular item
- There are 2^N permutations of N bits
- Therefore, N bits are needed to represent 2^N unique items

How many
items can be
represented by



1 bit ?	$2^1 = 2$ items
2 bits ?	$2^2 = 4$ items
3 bits ?	$2^3 = 8$ items
4 bits ?	$2^4 = 16$ items
5 bits ?	$2^5 = 32$ items

What is the maximum number that can be stored in one byte (8 bits)?

What is the maximum number that can be stored in one byte (8 bits)?

- 1 1 1 1 1 1 1 1
- 1 1 1 1 1 1 1 1
- $1*2^7 + 1*2^6 + 1*2^5 + 1*2^4 + 1*2^3 + 1*2^2 + 1*2^1 + 1*2^0$
- $1*128 + 1*64 + 1*32 + 1*16 + 1*8 + 1*4 + 1*2 + 1*1$
- $128 + 64 + 32 + 16 + 8 + 4 + 2 + 1 = 255$ (in decimal)
- Another way is: $1*2^8 - 1 = 256 - 1 = 255$

Analogy with car odometers



Analogy with car odometers



[<http://www.hyperocity.com/volvo240/images/Volvo/odometerrepair/speedo999999.jpg>]

Decimal to Binary Conversion (Using Guessing)

$$17 = 16 + 1 \rightarrow 10001_2$$

$$2^7 = 128$$

$$2^6 = 64$$

$$2^5 = 32$$

$$2^4 = 16 \quad \checkmark$$

$$2^3 = 8$$

$$2^2 = 4$$

$$2^1 = 2$$

$$2^0 = 1 \quad \checkmark$$

Decimal to Binary Conversion (Using Guessing)


$$212 = 128 + 64 + 16 + 4 \rightarrow 11010100_2$$

2^7	=	128	✓
2^6	=	64	✓
2^5	=	32	
2^4	=	16	✓
2^3	=	8	
2^2	=	4	✓
2^1	=	2	
2^0	=	1	

Converting from Decimal to Binary

				<i>result</i>	<i>remainder</i>
235	/	2	=	117	1
117	/	2	=	58	1
58	/	2	=	29	0
29	/	2	=	14	1
14	/	2	=	7	0
7	/	2	=	3	1
3	/	2	=	1	1
1	/	2	=	0	1

Converting from Decimal to Binary

				<i>result</i>	<i>remainder</i>	
235	/	2	=	117	1	
117	/	2	=	58	1	
58	/	2	=	29	0	
29	/	2	=	14	1	
14	/	2	=	7	0	
7	/	2	=	3	1	
3	/	2	=	1	1	
1	/	2	=	0	1	

$$235_{10} = 11101011_2$$

Convert $(857)_{10}$

				Remainder	
$857 \div 2$	$=$	428	1	LSB	
$428 \div 2$	$=$	214	0		
$214 \div 2$	$=$	107	0		
$107 \div 2$	$=$	53	1		
$53 \div 2$	$=$	26	1		
$26 \div 2$	$=$	13	0		
$13 \div 2$	$=$	6	1		
$6 \div 2$	$=$	3	0		
$3 \div 2$	$=$	1	1		
$1 \div 2$	$=$	0	1	MSB	

Result is $(1101011001)_2$

Octal System (Base 8)

0	1	2	3	4	5	6	7
10	11	12	13	14	15	16	17
20	21	22	23	24	25	26	27
30	31	32	33	34	35	36	37
40	41	42	43	44	45	46	47
50	51	52	53	54	55	56	57
60	61	62	63	64	65	66	67
70	71	72	73	74	75	76	77

Binary to Octal Conversion

000	→	0
001	→	1
010	→	2
011	→	3
100	→	4
101	→	5
110	→	6
111	→	7

Binary to Octal Conversion

$$101110010111_2 = ?_8$$

Binary to Octal Conversion

$$101110010111_2 = ?_8$$

101 110 010 111

Binary to Octal Conversion

$$101110010111_2 = ?_8$$

$$\begin{array}{cccc} 101 & 110 & 010 & 111 \\ \underbrace{\hspace{1em}} & \underbrace{\hspace{1em}} & \underbrace{\hspace{1em}} & \underbrace{\hspace{1em}} \\ 5 & 6 & 2 & 7 \end{array}$$

Binary to Octal Conversion

$$101110010111_2 = ?_8$$

$$\begin{array}{cccc} 101 & 110 & 010 & 111 \\ \underbrace{\hspace{1em}} & \underbrace{\hspace{1em}} & \underbrace{\hspace{1em}} & \underbrace{\hspace{1em}} \\ 5 & 6 & 2 & 7 \end{array}$$

$$\text{Thus, } 101110010111_2 = 5627_8$$

Hexadecimal System (Base 16)

$$52_{16} = 5 \times 16^1 + 2 \times 16^0 =$$

$$5 \times 16 + 2 \times 1 =$$

$$80 + 2 = 82_{10}$$

The 16 Hexadecimal Digits

0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F

The 16 Hexadecimal Digits

0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F

A diagram illustrating the mapping of hexadecimal digits to their decimal equivalents. The top row lists the hexadecimal digits: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F. The bottom row lists the decimal values: 10, 11, 12, 13, 14, 15. Red arrows point from each of the hexadecimal digits A, B, C, D, E, and F down to their corresponding decimal values 10, 11, 12, 13, 14, and 15 respectively.

10, 11, 12, 13, 14, 15

Hexadecimal to Decimal Conversion

$$C3_{16} = C \times 16^1 + 3 \times 16^0$$

$$= 12 \times 16 + 3 \times 1$$

$$= 192 + 3$$

$$= 195_{10}$$

Hexadecimal to Decimal Conversion

$$BEEF_{16} = ?_{10}$$

Hexadecimal to Decimal Conversion

$$\begin{aligned} BEEF_{16} &= B_{16} \times 16^3 + E_{16} \times 16^2 + E_{16} \times 16^1 + F_{16} \times 16^0 \\ &= 11 \times 16^3 + 14 \times 16^2 + 14 \times 16^1 + 15 \times 16^0 \\ &= 11 \times 4096 + 14 \times 256 + 14 \times 16 + 15 \times 1 \\ &= 45056 + 3584 + 224 + 15 \\ &= 48879_{10} \end{aligned}$$

Binary to Hexadecimal Conversion

0000	→	0
0001	→	1
0010	→	2
0011	→	3
0100	→	4
0101	→	5
0110	→	6
0111	→	7
1000	→	8
1001	→	9
1010	→	<i>A</i>
1011	→	<i>B</i>
1100	→	<i>C</i>
1101	→	<i>D</i>
1110	→	<i>E</i>
1111	→	<i>F</i>

Binary to Hexadecimal Conversion

0000	→	0	→	0
0001	→	1	→	1
0010	→	2	→	2
0011	→	3	→	3
0100	→	4	→	4
0101	→	5	→	5
0110	→	6	→	6
0111	→	7	→	7
1000	→	8	→	8
1001	→	9	→	9
1010	→	10	→	<i>A</i>
1011	→	11	→	<i>B</i>
1100	→	12	→	<i>C</i>
1101	→	13	→	<i>D</i>
1110	→	14	→	<i>E</i>
1111	→	15	→	<i>F</i>

Binary to Hexadecimal Conversion

$$101110010111_2 = ?_{16}$$

Binary to Hexadecimal Conversion

$$101110010111_2 = ?_{16}$$

1011 1001 0111

Binary to Hexadecimal Conversion

$$101110010111_2 = ?_{16}$$


1011 1001 0111



B 9 7

Binary to Hexadecimal Conversion

$$101110010111_2 = ?_{16}$$


1011 1001 0111


B 9 7

Thus, $101110010111_2 = B97_{16}$


Decimal to Hexadecimal Conversion

$$1396_{10} = 574_{16}$$

				<i>result</i>	<i>remainder</i>	
1396	/	16	=	87	4	
87	/	16	=	5	7	
5	/	16	=	0	5	

Decimal to Hexadecimal Conversion

$$502_{10} = 1F6_{16}$$

				<i>result</i>	<i>remainder</i>	
502	/	16	=	31	6	
31	/	16	=	1	15	
1	/	16	=	0	1	

Sample Midterm 1 Questions on Number Systems

4. Number Conversions (4 x 5p each = 20p)

(a) Convert 10101101_2 to decimal


$$\begin{aligned} & 1 \times 2^7 + 0 \times 2^6 + 1 \times 2^5 + 0 \times 2^4 + 1 \times 2^3 + 1 \times 2^2 + 0 \times 2^1 + 1 \times 2^0 = \\ & = 128 + 0 + 32 + 0 + 8 + 4 + 0 + 1 = \\ & = 128 + 40 + 5 = \boxed{173_{10}} \end{aligned}$$

(b) Convert 123_{10} to binary

$123/2$	$=$	61	1
$61/2$	$=$	30	1
$30/2$	$=$	15	0
$15/2$	$=$	7	1
$7/2$	$=$	3	1
$3/2$	$=$	1	1
$1/2$	$=$	0	1


1111011_2

(c) Convert 227_{10} to hexadecimal

$$\begin{array}{l} 227 / 16 = 14 \quad 3 \\ 14 / 16 = 0 \quad 14 \end{array}$$


$E3_{16}$

(d) Convert **COFFEE**₁₆ to octal.

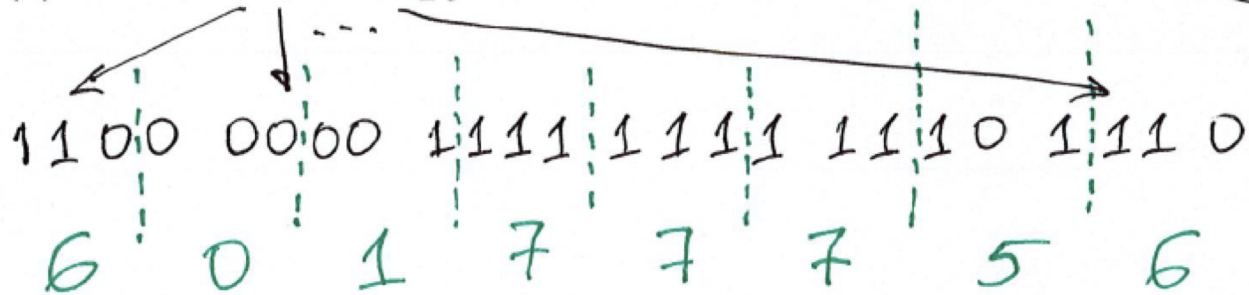

60177756₈

4. Number Conversions (5 x 4p each = 20p)

(a) Convert 10111001_2 to decimal

$$\underbrace{1 \times 2^7}_{128} + \cancel{0 \times 2^6} + \underbrace{1 \times 2^5}_{32} + \underbrace{1 \times 2^4}_{16} + \underbrace{1 \times 2^3}_{8} + \cancel{0 \times 2^2} + \cancel{0 \times 2^1} + \underbrace{1 \times 2^0}_{1} = 185$$

(b) Convert 135_{10} to binary

$$135 / 2 = 67$$

$$67 / 2 = 33$$

$$33 / 2 = 16$$

$$16 / 2 = 8$$

$$8 / 2 = 4$$

$$4 / 2 = 2$$

$$2 / 2 = 1$$

$$1 / 2 = 0$$

remainder

1

1

1

0

0

0

0

1



10000111_2

first
convert
to binary

(c) Convert 751₈ to hexadecimal

111 101 001

1E9₁₆

pad

0001 1110 1001
1 E 9

then
convert
from
binary to
hexadecimal

(d) Convert 219_{10} to hexadecimal

$$219 / 16 = 13$$

$$13 / 16 = 0$$

remainder

11

13



DB_{16}

$A=10$, $B=11$, $C=12$, $D=13$, $E=14$, $F=15$

(e) Convert 134_6 to binary

First
convert
to decimal

$$\underbrace{1 \times 6^2}_{36} + \underbrace{3 \times 6^1}_{18} + \underbrace{4 \times 6^0}_{4} = 58_{10}$$

111010_2

	<u>remainder</u>
$58/2 = 29$	0
$29/2 = 14$	1
$14/2 = 7$	0
$7/2 = 3$	1
$3/2 = 1$	1
$1/2 = 0$	1


↑
Convert
from
decimal
to binary

Signed integers are more complicated

We will talk more about them when we start with Chapter 3 in a couple of weeks.

The story with floats is even more complicated

IEEE 754-1985 Standard

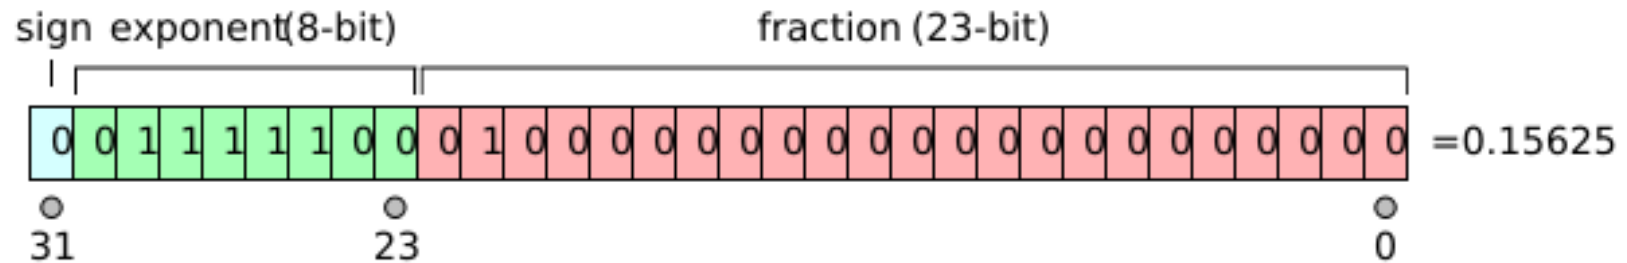

[http://en.wikipedia.org/wiki/IEEE_754]

On-line IEEE 754 Converter

- <https://www.h-schmidt.net/FloatConverter/IEEE754.html>
- **More about floating point numbers in Chapter 3.**

Storing Characters

- **This requires some convention that maps binary numbers to characters.**
- **ASCII table**
- **Unicode**

ASCII Table

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040	 	Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	\$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	((72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051))	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[[123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174	|	
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135]]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177		DEL

Source: www.LookupTables.com

Extended ASCII Codes

128	Ç	144	É	161	í	177	⌠	193	⌣	209	⌣	225	β	241	±
129	ù	145	æ	162	ó	178	⌡	194	⌣	210	⌣	226	Γ	242	≥
130	é	146	Æ	163	ú	179		195	⌣	211	⌣	227	π	243	≤
131	â	147	ô	164	ñ	180	⌣	196	—	212	⌣	228	Σ	244	∫
132	ä	148	ö	165	Ñ	181	⌣	197	⌣	213	⌣	229	σ	245	∫
133	à	149	ò	166	ª	182	⌣	198	⌣	214	⌣	230	μ	246	+
134	â	150	û	167	º	183	⌣	199	⌣	215	⌣	231	τ	247	≈
135	ç	151	ù	168	¿	184	⌣	200	⌣	216	⌣	232	Φ	248	°
136	ê	152	—	169	—	185	⌣	201	⌣	217	⌣	233	⊙	249	·
137	ë	153	Ö	170	¬	186	⌣	202	⌣	218	⌣	234	Ω	250	·
138	è	154	Û	171	½	187	⌣	203	⌣	219	■	235	δ	251	√
139	í	156	£	172	¼	188	⌣	204	⌣	220	■	236	∞	252	—
140	î	157	¥	173	¡	189	⌣	205	=	221	■	237	φ	253	²
141	ï	158	—	174	«	190	⌣	206	⌣	222	■	238	ε	254	■
142	Ä	159	f	175	»	191	⌣	207	⌣	223	■	239	∧	255	
143	Å	160	á	176	⌠	192	⌣	208	⌣	224	α	240	≡		

Source: www.LookupTables.com

The Unicode Character Code

- <http://www.unicode.org/charts/>
- <https://en.wikipedia.org/wiki/Unicode>
- **The original standard uses 16 bits (2 bytes)**
- **The later extensions use up to 32 bits.**

The Greek Alphabet

	037	038	039	03A	03B	03C	03D	03E	03F
0	Ɔ		í	Π	ύ	π	δ	ϑ	κ
	0370		0390	03A0	03B0	03C0	03D0	03E0	03F0
1	τ		Α	Ρ	α	ρ	θ	ϣ	ο
	0371		0391	03A1	03B1	03C1	03D1	03E1	03F1
2	Τ		Β		β	ς	Υ	Ω	Ϸ
	0372		0392		03B2	03C2	03D2	03E2	03F2
3	Τ		Γ	Σ	γ	σ	Ϛ	ω	ι
	0373		0393	03A3	03B3	03C3	03D3	03E3	03F3
4	´	´	Δ	Τ	δ	τ	Ϛ	ϣ	Θ
	0374	0384	0394	03A4	03B4	03C4	03D4	03E4	03F4
5	´	´	Ε	Υ	ε	υ	φ	ϣ	€
	0375	0385	0395	03A5	03B5	03C5	03D5	03E5	03F5
6	И	À	Z	Φ	ζ	φ	ω	ϣ	ε
	0376	0386	0396	03A6	03B6	03C6	03D6	03E6	03F6
7	и	·	H	X	η	χ	ϣ	ϣ	Ɔ
	0377	0387	0397	03A7	03B7	03C7	03D7	03E7	03F7
8		´	Ε	Θ	Ψ	θ	ψ	Ω	ϣ
		0388	0398	03A8	03B8	03C8	03D8	03E8	03F8
9		´	H	I	Ω	ι	ω	ο	ε
		0389	0399	03A9	03B9	03C9	03D9	03E9	03F9
A	´	´	I	K	İ	κ	ï	ϣ	Μ
	037A	038A	039A	03AA	03BA	03CA	03DA	03EA	03FA
B	Ϸ		Λ	Ϛ	λ	ü	ς	ϣ	ϣ
	037B		039B	03AB	03BB	03CB	03DB	03EB	03FB
C	Ϸ	´	Ο	Μ	ά	μ	ό	Ɔ	ρ
	037C	038C	039C	03AC	03BC	03CC	03DC	03EC	03FC
D	ϑ		N	έ	ν	ύ	Ɔ	σ	Ϸ
	037D		039D	03AD	03BD	03CD	03DD	03ED	03FD
E	;	´	Υ	Ε	ή	ξ	ώ	ϣ	†
	037E	038E	039E	03AE	03BE	03CE	03DE	03EE	03FE
F	J	´	Ω	Ο	ί	ο	Ɔ	ϣ	Ϸ
	037F	038F	039F	03AF	03BF	03CF	03DF	03EF	03FF

<http://www.unicode.org/charts/>

Close up

	037	038	039	03A	03B	03C	03D	03E	03F
0	Ɔ 0370		ı̇ 0390	Π 03A0	Û 03B0	π 03C0	ϐ 03D0	ϣ 03E0	κ 03F0
1	ƒ 0371		Α 0391	Ρ 03A1	α 03B1	ρ 03C1	ϑ 03D1	ϣ 03E1	ϙ 03F1
2	Ƨ 0372		Β 0392		β 03B2	ς 03C2	Υ 03D2	Ω 03E2	Ϙ 03F2
3	Ƨ 0373		Γ 0393	Σ 03A3	γ 03B3	σ 03C3	Ϛ 03D3	ω 03E3	ϙ 03F3

Close up

This is the Hexadecimal number for the Greek letter alpha: 03B1

	037	038	039	03A	03B	03C	03D	03E	03F
0	Ɔ 0370		í 0390	Π 03A0	ü 03B0	π 03C0	ϐ 03D0	ϑ 03E0	κ 03F0
1	ƒ 0371		Α 0391	Ρ 03A1	α 03B1	ρ 03C1	ϑ 03D1	ϑ 03E1	ϙ 03F1
2	Ƨ 0372		Β 0392		β 03B2	ς 03C2	Υ 03D2	Ω 03E2	Ϙ 03F2
3	Ƨ 0373		Γ 0393	Σ 03A3	γ 03B3	σ 03C3	Υ 03D3	ω 03E3	ϙ 03F3

Close up

This is the Hexadecimal number for the Greek letter beta: 03B2

	037	038	039	03A	03B	03C	03D	03E	03F
0	Ɔ 0370		í 0390	Π 03A0	ü 03B0	π 03C0	ϐ 03D0	ϑ 03E0	κ 03F0
1	ƒ 0371		Α 0391	Ρ 03A1	α 03B1	ρ 03C1	ϑ 03D1	ϑ 03E1	ϙ 03F1
2	Ƨ 0372		Β 0392		β 03B2	ς 03C2	Υ 03D2	Ω 03E2	Ϙ 03F2
3	Ƨ 0373		Γ 0393	Σ 03A3	γ 03B3	σ 03C3	Υ 03D3	ω 03E3	ϙ 03F3

Close up

This is the Hexadecimal number for the Greek letter gamma: 03B3

	037	038	039	03A	03B	03C	03D	03E	03F
0	Ɔ 0370		í 0390	Π 03A0	ü 03B0	π 03C0	ϐ 03D0	ϑ 03E0	κ 03F0
1	ƒ 0371		Α 0391	Ρ 03A1	α 03B1	ρ 03C1	ϑ 03D1	ϑ 03E1	ϙ 03F1
2	Ƨ 0372		Β 0392		β 03B2	ς 03C2	Υ 03D2	Ω 03E2	Ϙ 03F2
3	Ƨ 0373		Γ 0393	Σ 03A3	γ 03B3	σ 03C3	Υ 03D3	ω 03E3	ϙ 03F3

Close up

This is the Hexadecimal number for the Greek letter pi: 03C0







































































	037	038	039	03A	03B	03C	03D	03E	03F
0	Ɔ 0370		í 0390	Π 03A0	Û 03B0	π 03C0	ϐ 03D0	ϣ 03E0	κ 03F0
1	ƒ 0371		Α 0391	Ρ 03A1	α 03B1	ρ 03C1	ϑ 03D1	ϣ 03E1	Ϟ 03F1
2	Ƨ 0372		Β 0392		β 03B2	ς 03C2	Υ 03D2	Ω 03E2	Ϙ 03F2
3	Ƨ 0373		Γ 0393	Σ 03A3	γ 03B3	σ 03C3	Υ 03D3	ω 03E3	ϣ 03F3

Egyptian Hieroglyphs

	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	130A	130B	130C	130D
0														
1														
2														
3														
4														
5														
6														
7														
8														
9														
A														
B														
C														
D														
E														
F														

<http://www.unicode.org/charts/>

Close up

	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	130A	130B	130C	130D
0	 13000	 13010	 13020	 13030	 13040	 13050	 13060	 13070	 13080	 13090	 130A0	 130B0	 130C0	 130D0
1	 13001	 13011	 13021	 13031	 13041	 13051	 13061	 13071	 13081	 13091	 130A1	 130B1	 130C1	 130D1
2	 13002	 13012	 13022	 13032	 13042	 13052	 13062	 13072	 13082	 13092	 130A2	 130B2	 130C2	 130D2
3	 13003	 13013	 13023	 13033	 13043	 13053	 13063	 13073	 13083	 13093	 130A3	 130B3	 130C3	 130D3
4	 13004	 13014	 13024	 13034	 13044	 13054	 13064	 13074	 13084	 13094	 130A4	 130B4	 130C4	 130D4

Questions?

THE END