


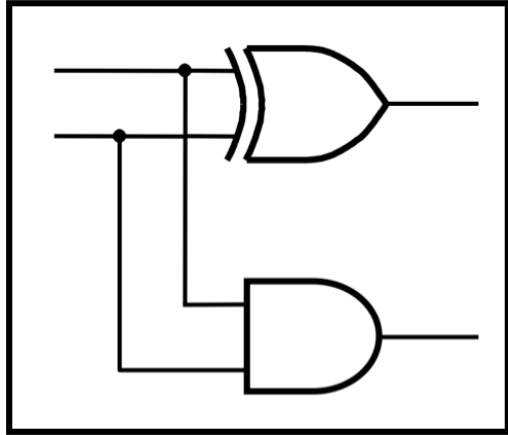

CprE 2810: Digital Logic

Instructor: Alexander Stoytchev

<http://www.ece.iastate.edu/~alexs/classes/>

Signed Numbers

CprE 2810: Digital Logic
Iowa State University, Ames, IA
Copyright © Alexander Stoytchev

Signed **Integer** Numbers


*CprE 2810: Digital Logic
Iowa State University, Ames, IA
Copyright © Alexander Stoytchev*

**Today's Lecture is About
Addition and Subtraction of
Signed Numbers**


Quick Review

Addition of 1-bit Unsigned Numbers

Addition of two 1-bit numbers (there are four possible cases)

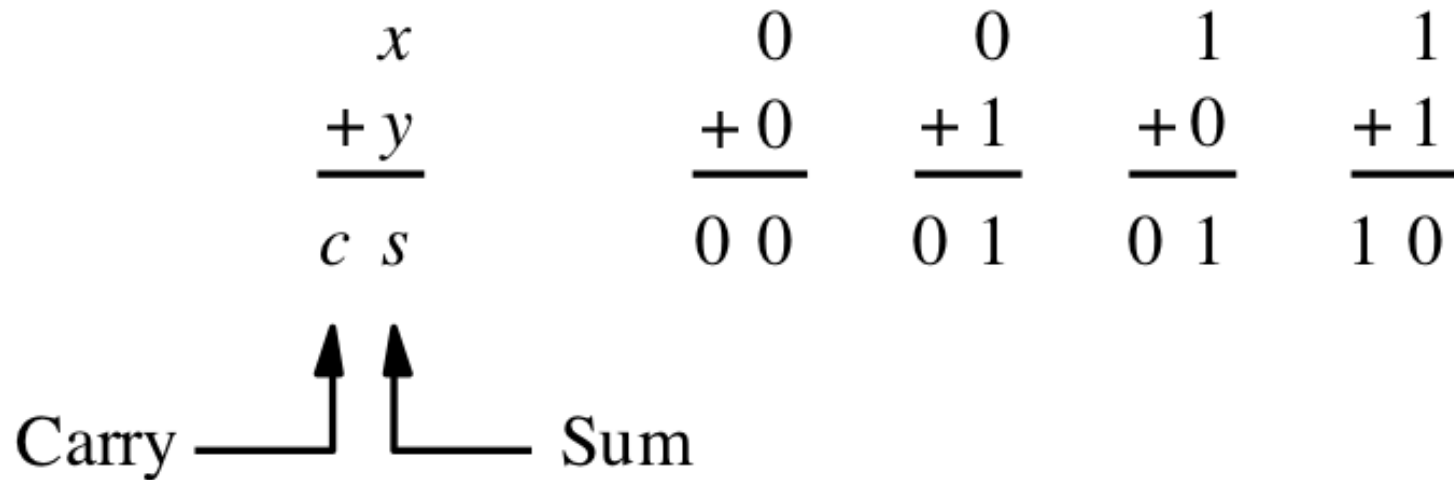

Addition of two 1-bit numbers (there are four possible cases)

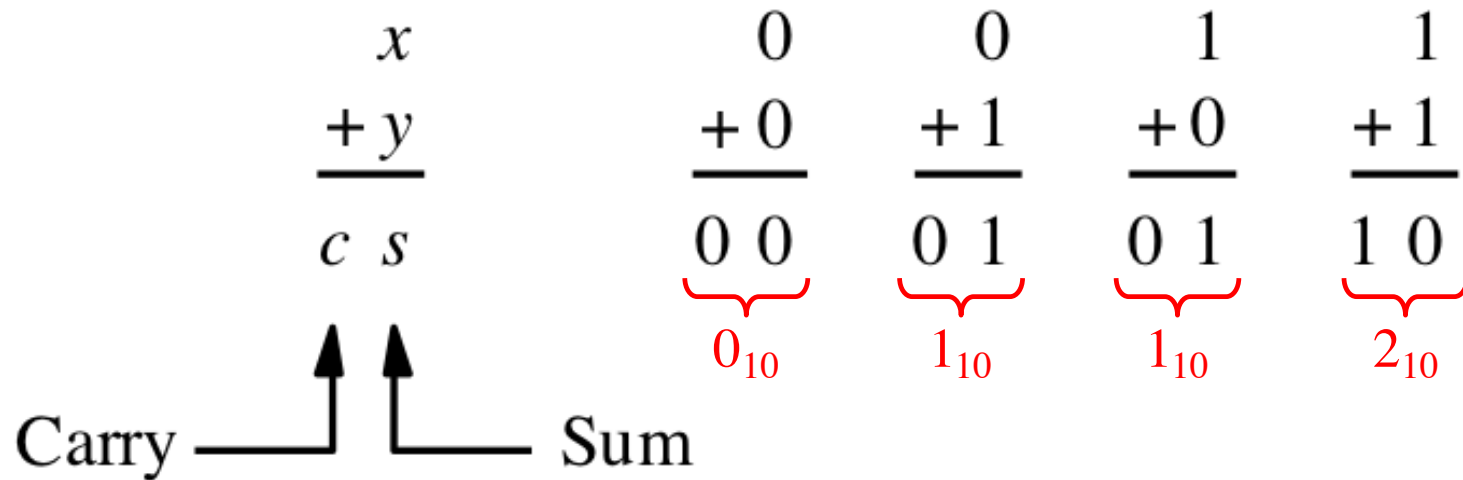

[Figure 3.1a from the textbook]

Adding two bits (the truth table)

x	y	Carry c	Sum s
0	0	0	0
0	1	0	1
1	0	0	1
1	1	1	0


[Figure 3.1b from the textbook]

Adding two bits (the truth table)

x	y		Carry c		Sum s	
0	+	0	=	0	0	= 0_{10}
0	+	1	=	0	1	= 1_{10}
1	+	0	=	0	1	= 1_{10}
1	+	1	=	1	0	= 2_{10}


[Figure 3.1b from the textbook]

Adding two bits (the logic circuit)

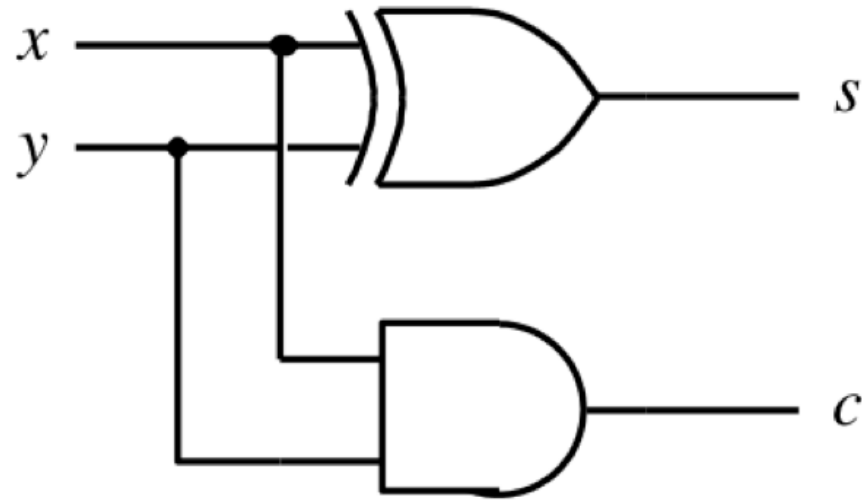

[Figure 3.1c from the textbook]

The Half-Adder

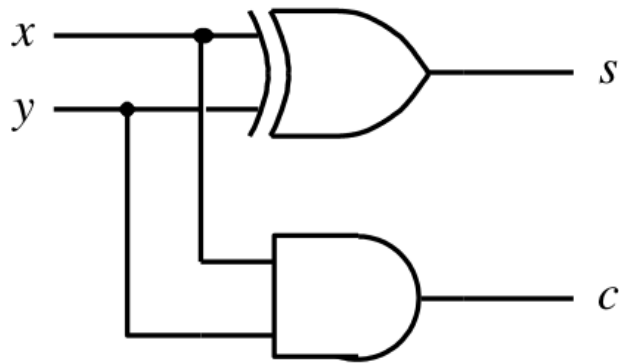

(c) Circuit



(d) Graphical symbol

Addition of Multibit Unsigned Numbers

Analogy with addition in base 10

$$\begin{array}{r} + \quad \quad \quad x_2 \quad x_1 \quad x_0 \\ \quad \quad \quad y_2 \quad y_1 \quad y_0 \\ \hline \quad \quad \quad s_2 \quad s_1 \quad s_0 \end{array}$$

Analogy with addition in base 10

$$\begin{array}{r} + \quad \quad 3 \quad 8 \quad 9 \\ \quad \quad 1 \quad 5 \quad 7 \\ \hline \quad \quad 5 \quad 4 \quad 6 \end{array}$$

Analogy with addition in base 10

carry	0	1	1	0
		3	8	9
+		1	5	7
		5	4	6

Analogy with addition in base 10

$$\begin{array}{rcccc} & C_3 & C_2 & C_1 & C_0 \\ + & & X_2 & X_1 & X_0 \\ & & Y_2 & Y_1 & Y_0 \\ \hline & & S_2 & S_1 & S_0 \end{array}$$

Another example in base 10

$$\begin{array}{r} + \quad \quad \quad 9 \quad 3 \quad 8 \\ \quad \quad \quad 2 \quad 1 \quad 4 \\ \hline \quad \quad 1 \quad 1 \quad 5 \quad 2 \end{array}$$

Another example in base 10

carry	1	0	1	0
		9	3	8
+		2	1	4
		1	5	2

Example in base 2

$$\begin{array}{r} + \quad \quad 1 \quad 0 \quad 1 \\ \quad \quad 1 \quad 1 \quad 0 \\ \hline \end{array}$$

Example in base 2

carry	1	0	0	0
		1	0	1
+		1	1	0
	1	0	1	1

Example in base 2

carry	1	0	0	0
		1	0	1
+		1	1	0
	1	0	1	1

	5_{10}
+	6_{10}
	11_{10}

The general case in base 2

$$\begin{array}{rcccc} & C_3 & C_2 & C_1 & C_0 \\ + & & X_2 & X_1 & X_0 \\ & & Y_2 & Y_1 & Y_0 \\ \hline & & S_2 & S_1 & S_0 \end{array}$$

The general case in base 2

$$\begin{array}{rcccc} & C_3 & C_2 & C_1 & C_0 \\ + & & X_2 & X_1 & X_0 \\ & & Y_2 & Y_1 & Y_0 \\ \hline & & S_2 & S_1 & S_0 \end{array}$$

given these
3 inputs

The general case in base 2

given these
3 inputs

	C_3	C_2	C_1	C_0
		X_2	X_1	X_0
		Y_2	Y_1	Y_0
+				
		S_2	S_1	S_0

compute these
2 outputs

The general case in base 2

$$\begin{array}{rcccc} & c_3 & c_2 & c_1 & c_0 \\ + & & x_2 & x_1 & x_0 \\ & & y_2 & y_1 & y_0 \\ \hline & & s_2 & s_1 & s_0 \end{array}$$

The general case in base 2

$$\begin{array}{rcccc} & \boxed{C_3} & \boxed{C_2} & C_1 & C_0 \\ + & & \boxed{x_2} & x_1 & x_0 \\ & & \boxed{y_2} & y_1 & y_0 \\ \hline & \boxed{S_2} & S_1 & S_0 & \end{array}$$

Problem Statement and Truth Table

...	c_{l+1}	c_l	...
...	...	x_l	...
...	...	y_l	...
...	...	s_l	...

Bit position i

c_i	x_i	y_i	c_{i+1}	s_i
0	0	0	0	0
0	0	1	0	1
0	1	0	0	1
0	1	1	1	0
1	0	0	0	1
1	0	1	1	0
1	1	0	1	0
1	1	1	1	1

[Figure 3.2b from the textbook]

[Figure 3.3a from the textbook]

Problem Statement and Truth Table

...	c_{l+1}	c_l	...
...	...	x_l	...
...	...	y_l	...
...	...	s_l	...

[Figure 3.2b from the textbook]

c_i	x_i	y_i		c_{i+1}		s_i	
0	+	0	+	0	=	0	= 0 ₁₀
0	+	0	+	1	=	0	= 1 ₁₀
0	+	1	+	0	=	0	= 1 ₁₀
0	+	1	+	1	=	1	= 2 ₁₀
1	+	0	+	0	=	0	= 1 ₁₀
1	+	0	+	1	=	1	= 2 ₁₀
1	+	1	+	0	=	1	= 2 ₁₀
1	+	1	+	1	=	1	= 3 ₁₀

[Figure 3.3a from the textbook]

Let's fill-in the two K-maps

c_i	x_i	y_i	c_{i+1}	s_i
0	0	0	0	0
0	0	1	0	1
0	1	0	0	1
0	1	1	1	0
1	0	0	0	1
1	0	1	1	0
1	1	0	1	0
1	1	1	1	1

$c_i \backslash x_i y_i$	00	01	11	10
0				
1				

$s_i =$

$c_i \backslash x_i y_i$	00	01	11	10
0				
1				

$c_{i+1} =$

[Figure 3.3a-b from the textbook]

Let's fill-in the two K-maps

c_i	x_i	y_i	c_{i+1}	s_i
0	0	0	0	0
0	0	1	0	1
0	1	0	0	1
0	1	1	1	0
1	0	0	0	1
1	0	1	1	0
1	1	0	1	0
1	1	1	1	1

$x_i y_i$		00	01	11	10
c_i	0		1		1
	1	1		1	


$$s_i = x_i \oplus y_i \oplus c_i$$

$x_i y_i$		00	01	11	10
c_i	0			1	
	1		1	1	1

$$c_{i+1} = x_i y_i + x_i c_i + y_i c_i$$


[Figure 3.3a-b from the textbook]

The circuit for the two expressions

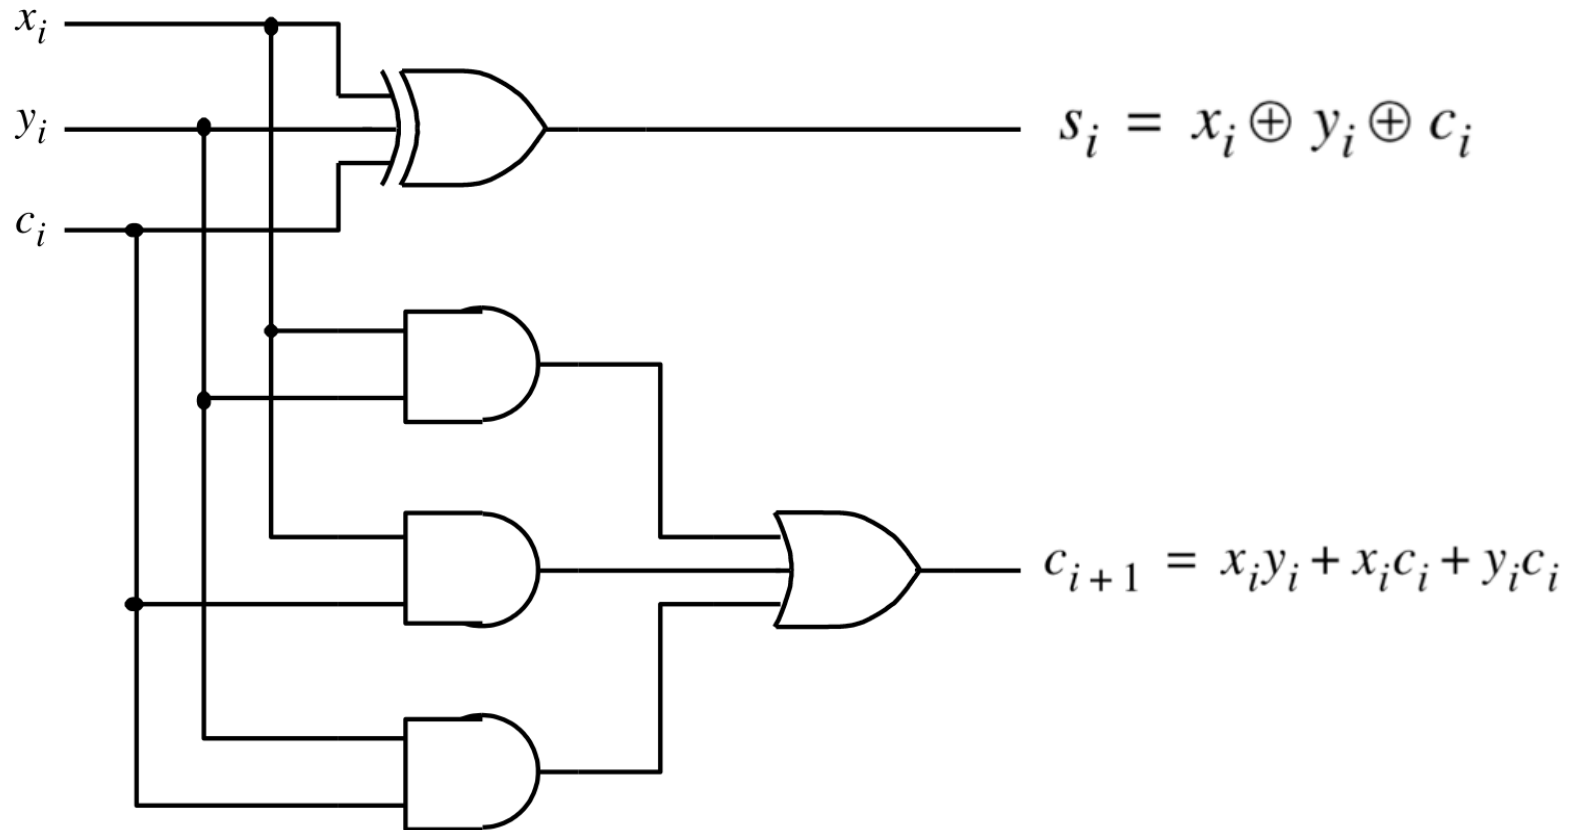

[Figure 3.3c from the textbook]

This is called the Full-Adder


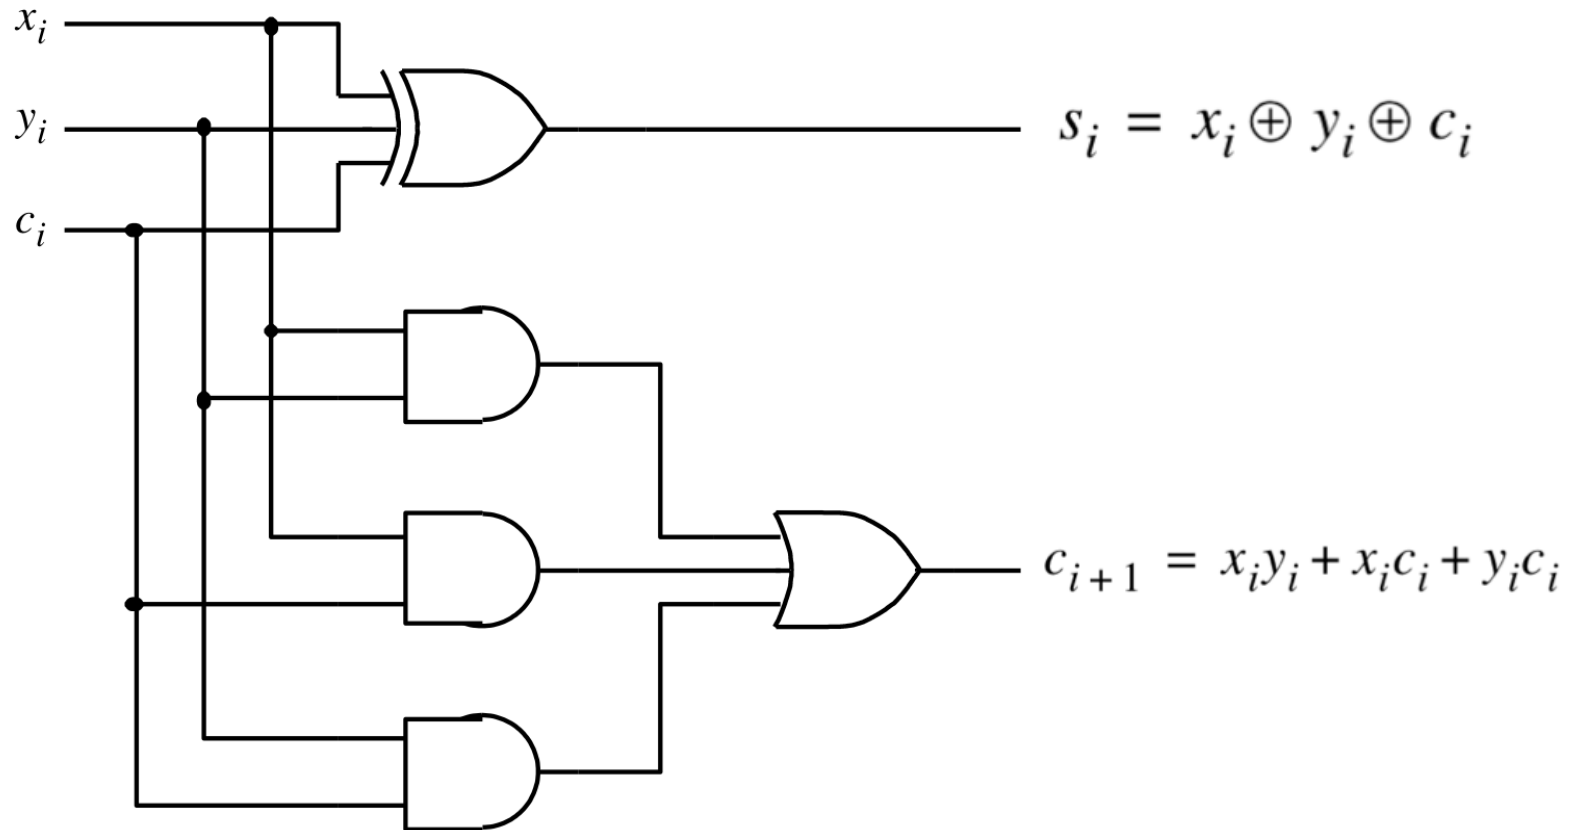


[Figure 3.3c from the textbook]



XOR Magic

(s_i can be implemented in two different ways)


$$s_i = x_i \oplus y_i \oplus c_i$$

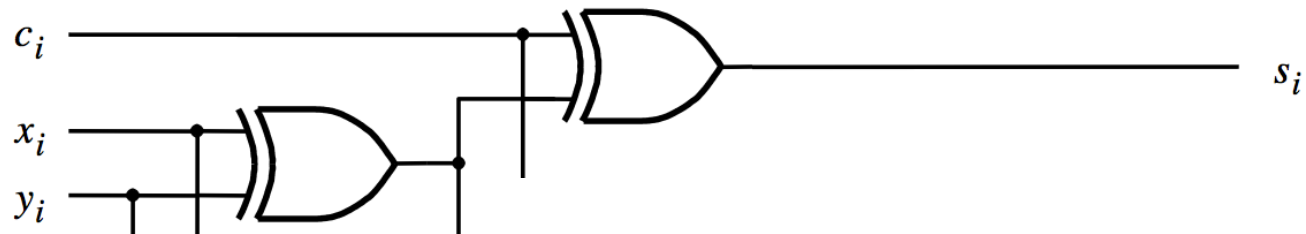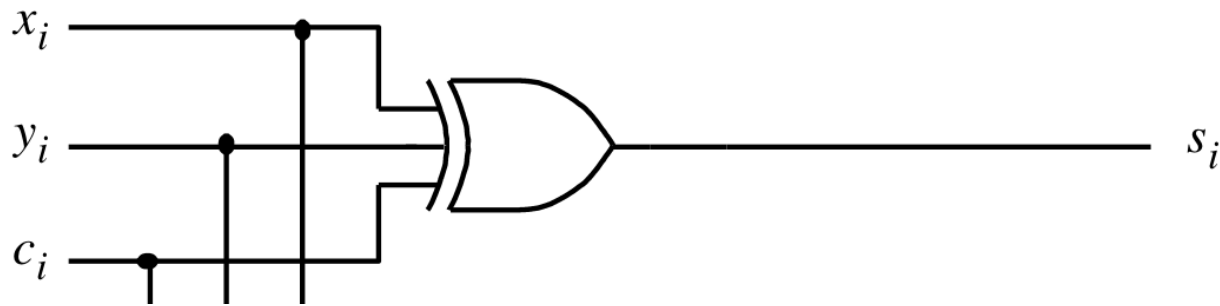


These two circuits are equivalent

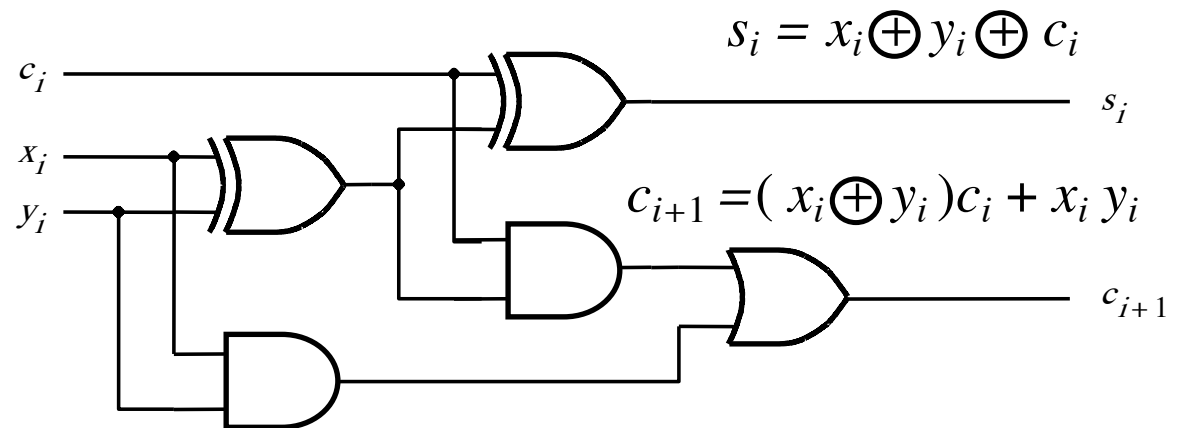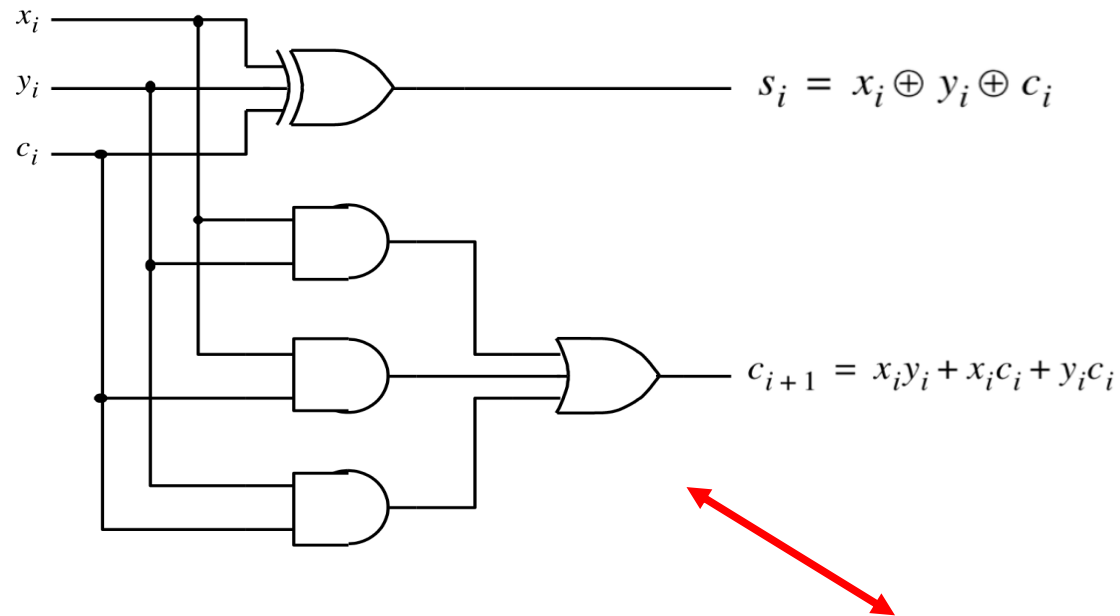

A decomposed implementation of the full-adder circuit

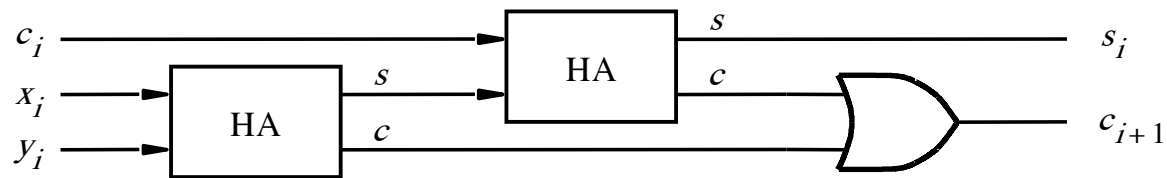


(a) Block diagram

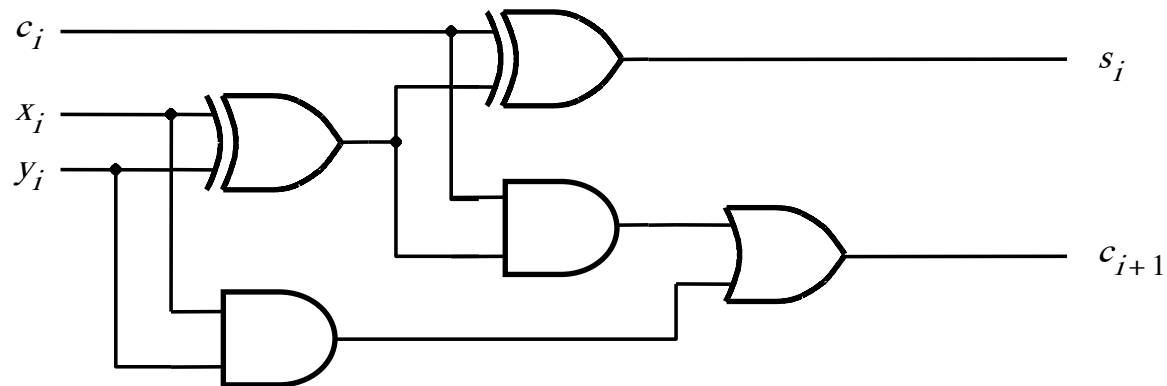


(b) Detailed diagram

[Figure 3.4 from the textbook]

A decomposed implementation of the full-adder circuit

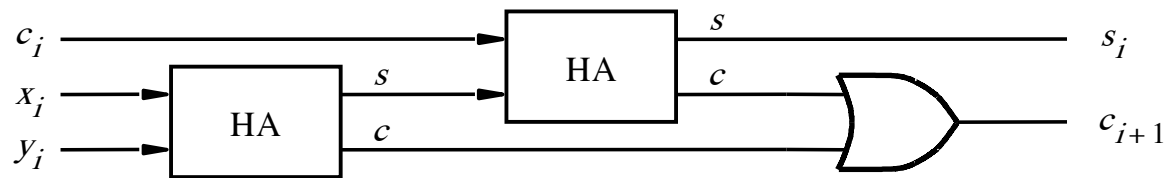


(a) Block diagram

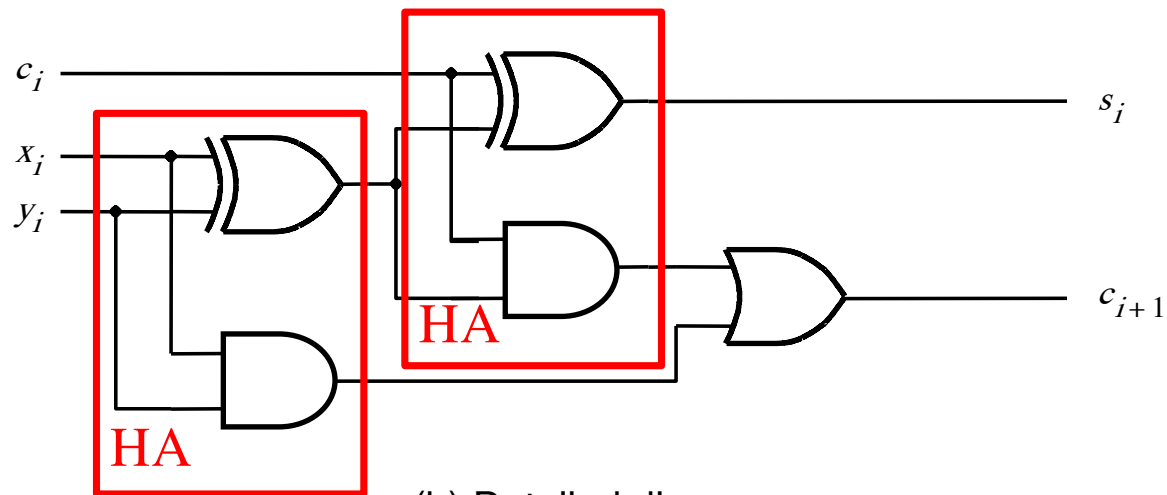


(b) Detailed diagram

[Figure 3.4 from the textbook]


The Full-Adder Abstraction

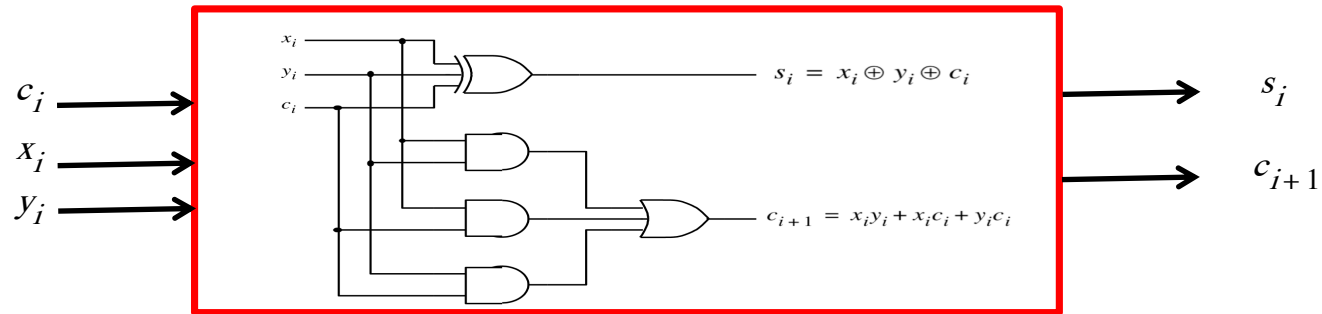


The Full-Adder Abstraction

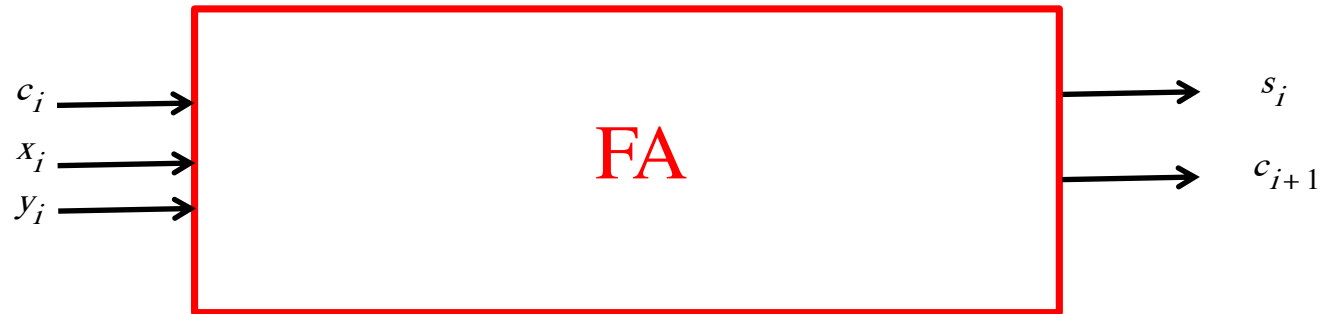


The Full-Adder Abstraction

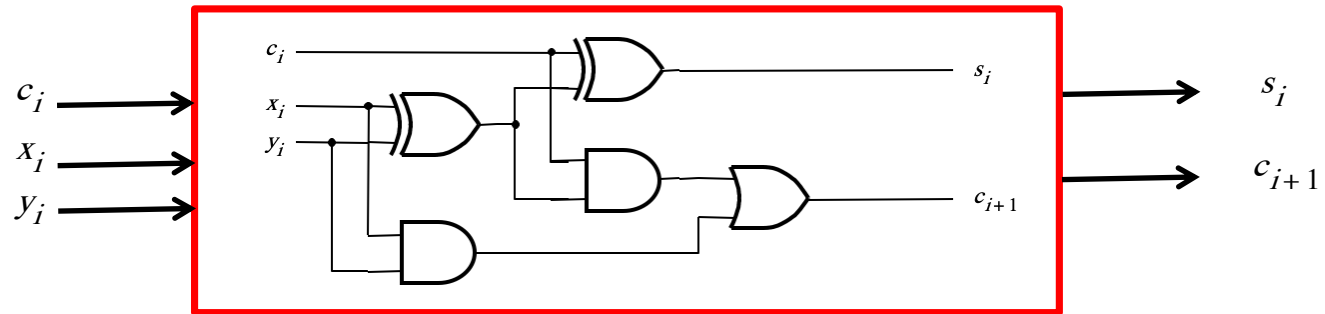


The Full-Adder Abstraction

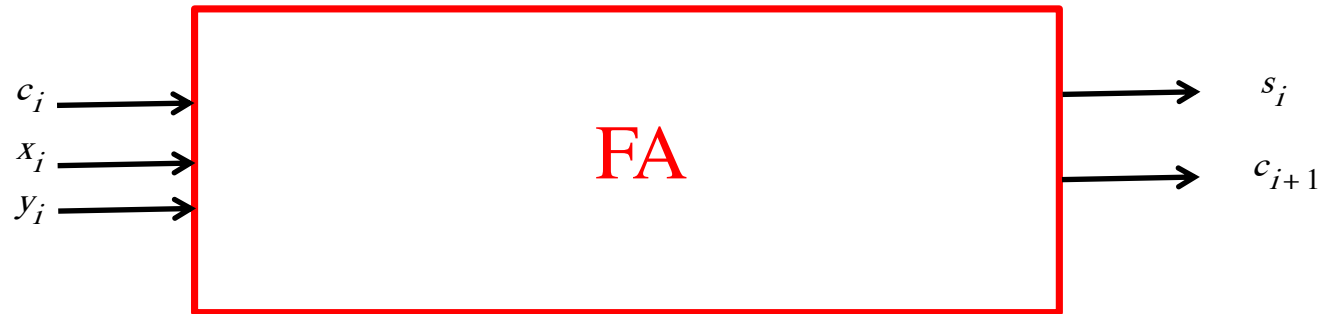


The Full-Adder Abstraction

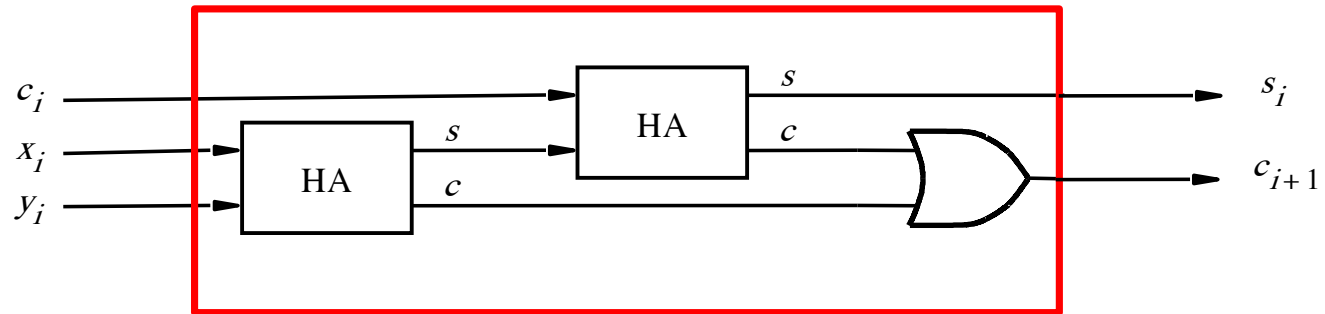


The Full-Adder Abstraction

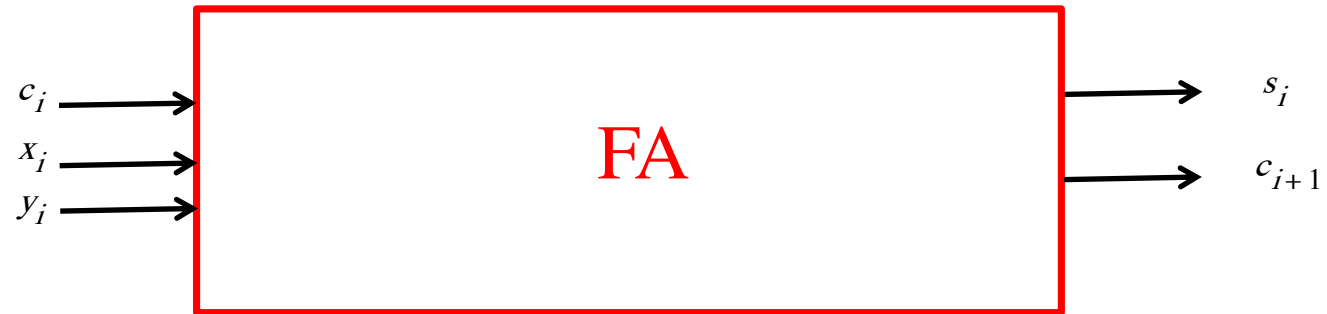

We can place the arrows anywhere

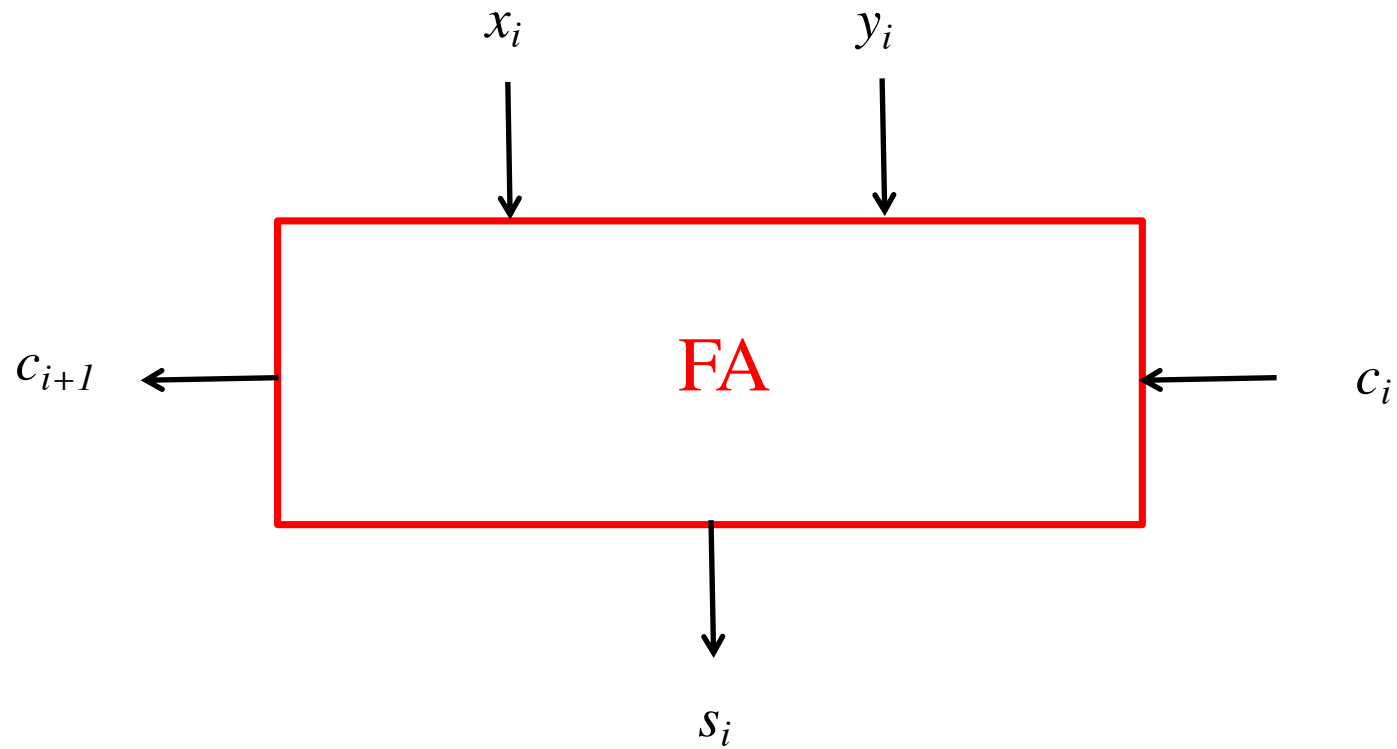


***n*-bit ripple-carry adder**

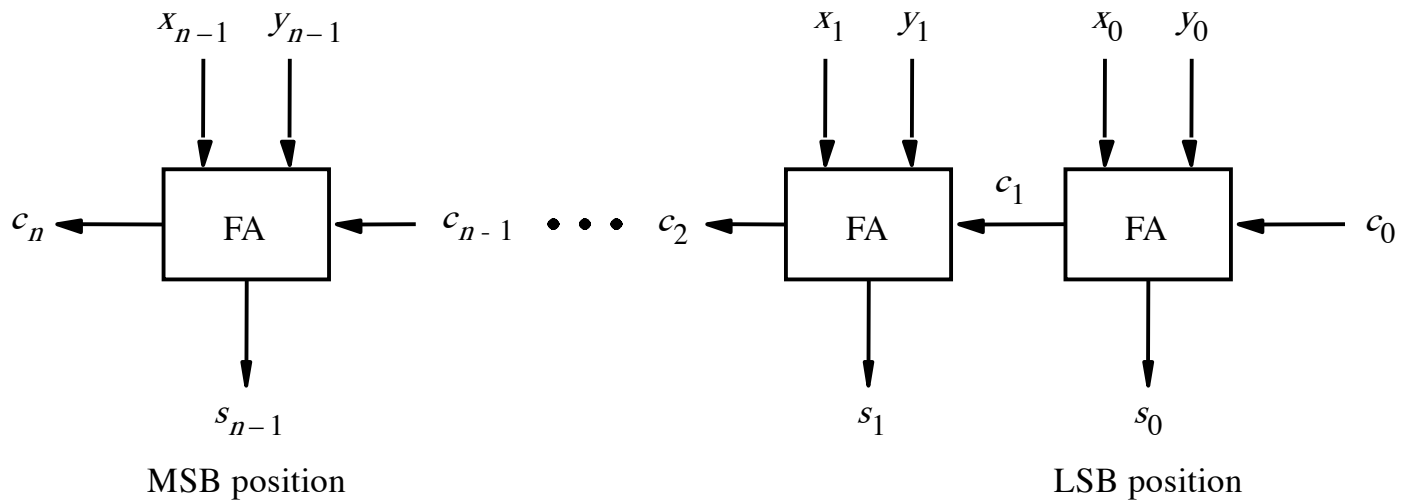


[Figure 3.5 from the textbook]


***n*-bit ripple-carry adder abstraction**

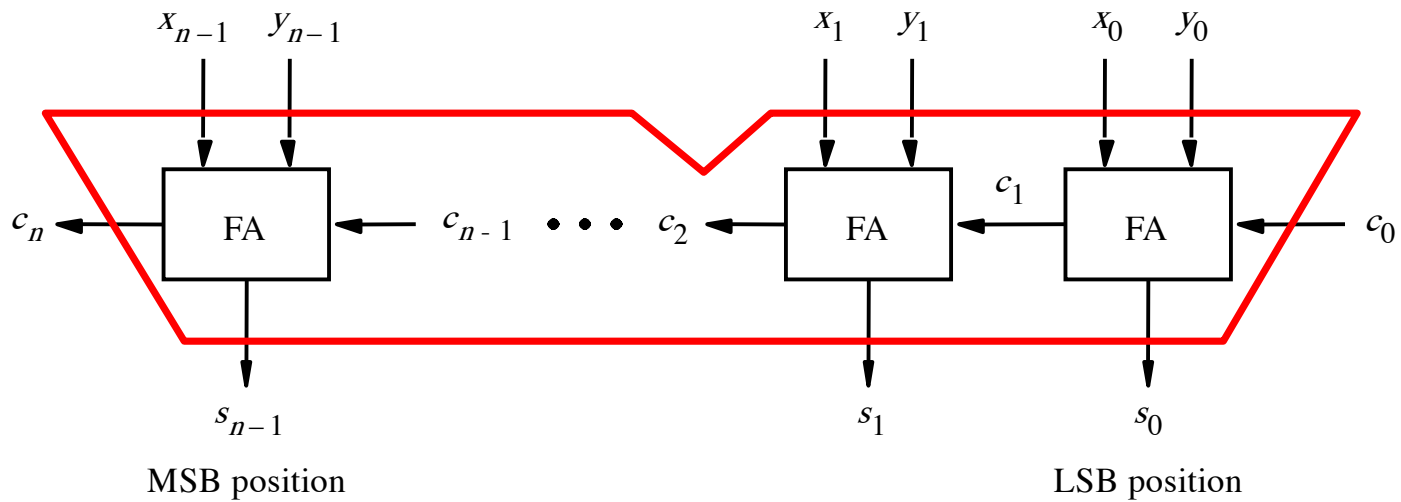

***n*-bit ripple-carry adder abstraction**

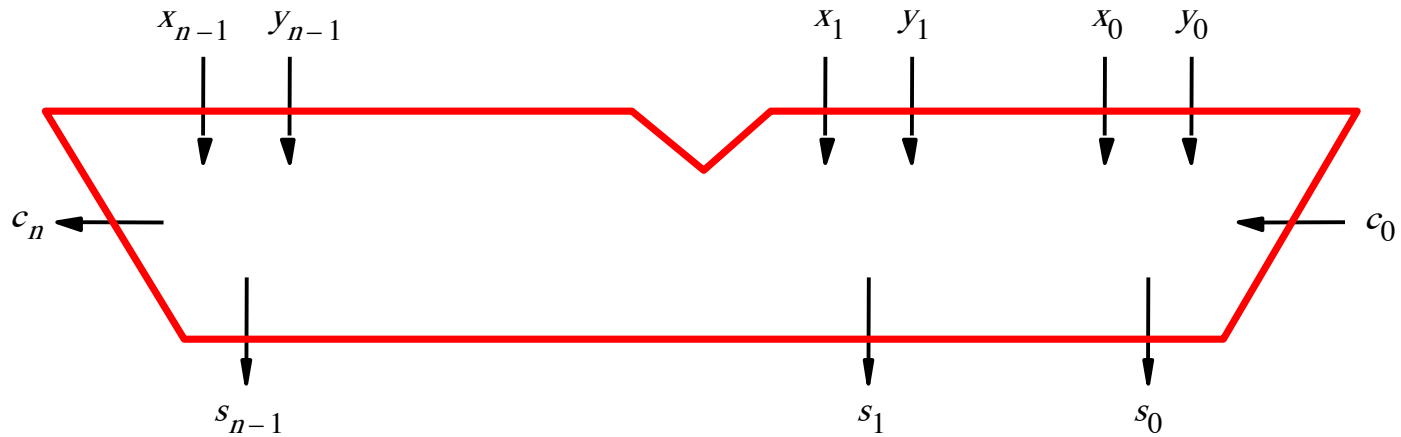


The x and y lines are typically grouped together for better visualization, but the underlying logic remains the same

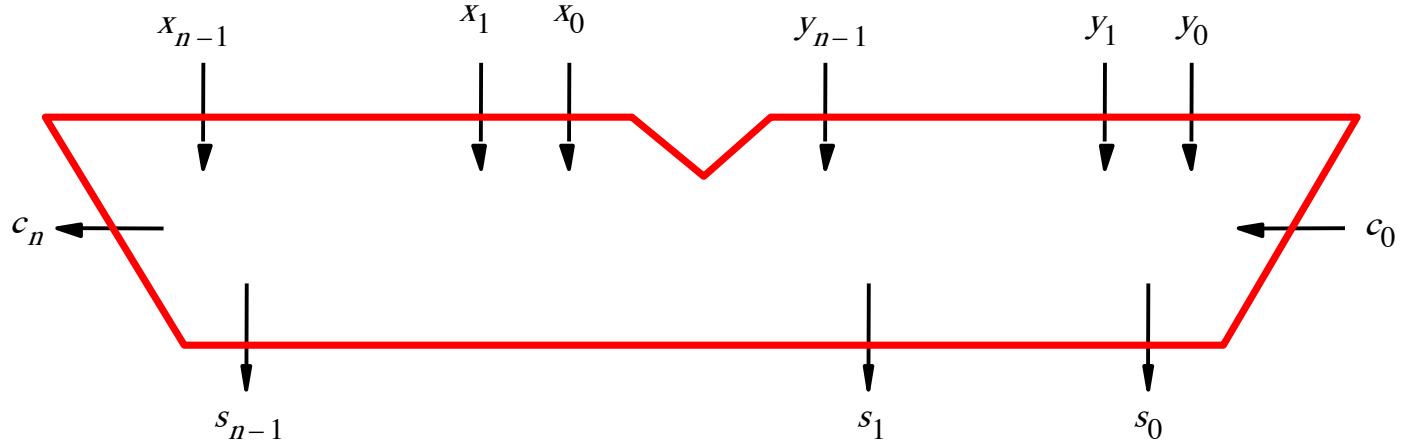


Example:

Computing $5+6$ using a 5-bit adder

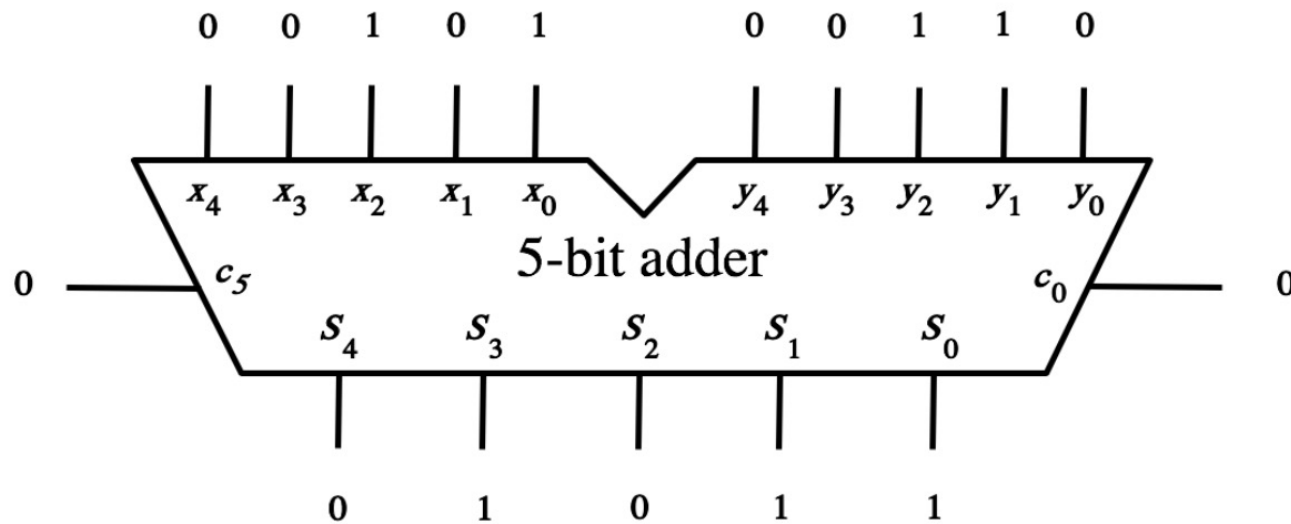


Example:

Computing $5+6$ using a 5-bit adder

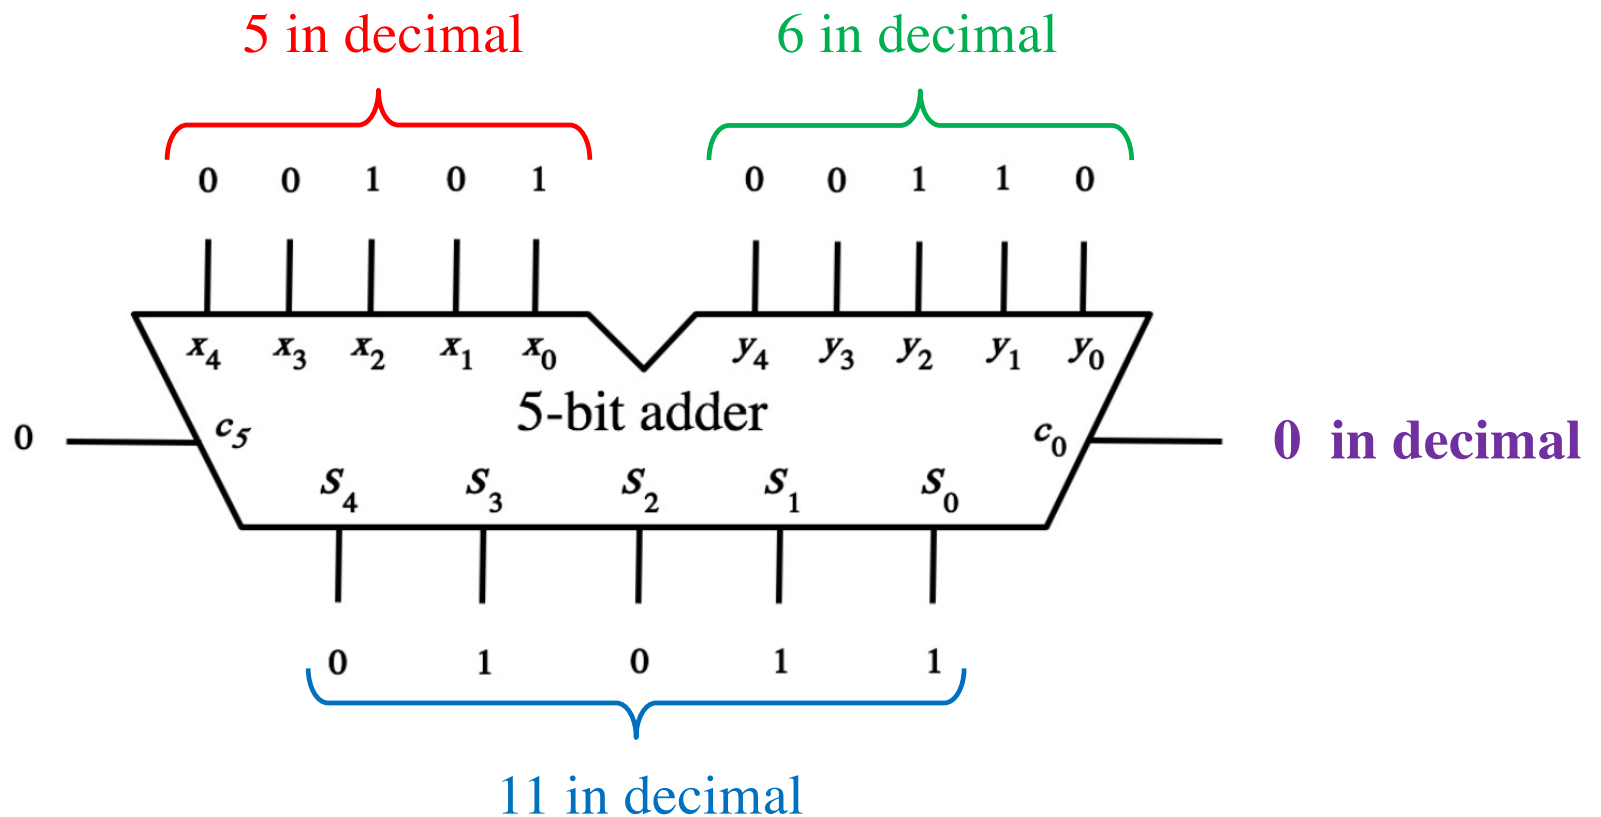

Example:

Computing 5+6 using a 5-bit adder

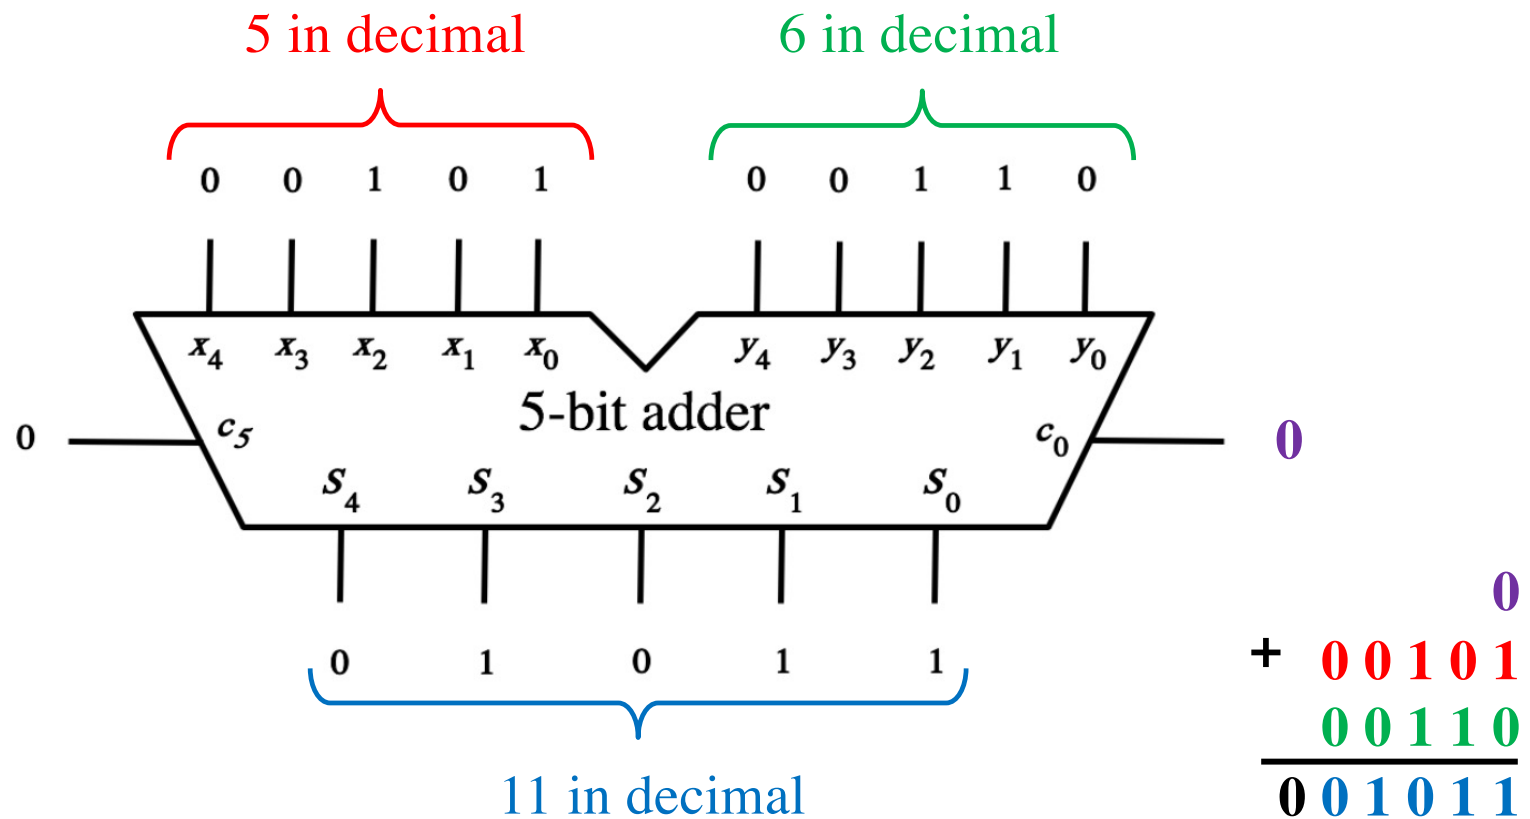

Math Review

Math Review: Subtraction

$$\begin{array}{r} 39 \\ - 15 \\ \hline ?? \end{array}$$

Math Review: Subtraction

$$\begin{array}{r} 39 \\ - 15 \\ \hline 24 \end{array}$$

Math Review: Subtraction

$$\begin{array}{r} 82 \\ - 61 \\ \hline ?? \end{array}$$

$$\begin{array}{r} 48 \\ - 26 \\ \hline ?? \end{array}$$

$$\begin{array}{r} 32 \\ - 11 \\ \hline ?? \end{array}$$

Math Review: Subtraction

$$\begin{array}{r} 82 \\ - 61 \\ \hline 21 \end{array}$$

$$\begin{array}{r} 48 \\ - 26 \\ \hline 22 \end{array}$$

$$\begin{array}{r} 32 \\ - 11 \\ \hline 21 \end{array}$$

Math Review: Subtraction

$$\begin{array}{r} 82 \\ - 64 \\ \hline ?? \end{array}$$

$$\begin{array}{r} 48 \\ - 29 \\ \hline ?? \end{array}$$

$$\begin{array}{r} 32 \\ - 13 \\ \hline ?? \end{array}$$

Math Review: Subtraction

$$\begin{array}{r} 82 \\ - 64 \\ \hline 18 \end{array}$$

$$\begin{array}{r} 48 \\ - 29 \\ \hline 19 \end{array}$$

$$\begin{array}{r} 32 \\ - 13 \\ \hline 19 \end{array}$$

The problems in which row are easier to calculate?

$$\begin{array}{r} 82 \\ - 61 \\ \hline ?? \end{array}$$

$$\begin{array}{r} 48 \\ - 26 \\ \hline ?? \end{array}$$

$$\begin{array}{r} 32 \\ - 11 \\ \hline ?? \end{array}$$

$$\begin{array}{r} 82 \\ - 64 \\ \hline ?? \end{array}$$

$$\begin{array}{r} 48 \\ - 29 \\ \hline ?? \end{array}$$

$$\begin{array}{r} 32 \\ - 13 \\ \hline ?? \end{array}$$

The problems in which row are easier to calculate?

$$\begin{array}{r} 82 \\ - 61 \\ \hline 21 \end{array}$$

$$\begin{array}{r} 48 \\ - 26 \\ \hline 22 \end{array}$$

$$\begin{array}{r} 32 \\ - 11 \\ \hline 21 \end{array}$$

Why?

$$\begin{array}{r} 82 \\ - 64 \\ \hline 18 \end{array}$$

$$\begin{array}{r} 48 \\ - 29 \\ \hline 19 \end{array}$$

$$\begin{array}{r} 32 \\ - 13 \\ \hline 19 \end{array}$$

Another Way to Do Subtraction

$$82 - 64 = 82 + 100 - 100 - 64$$

Another Way to Do Subtraction

$$82 - 64 = 82 + 100 - 100 - 64$$

$$= 82 + (100 - 64) - 100$$

Another Way to Do Subtraction

$$82 - 64 = 82 + 100 - 100 - 64$$

$$= 82 + (100 - 64) - 100$$

$$= 82 + (99 + 1 - 64) - 100$$

Another Way to Do Subtraction

$$82 - 64 = 82 + 100 - 100 - 64$$

$$= 82 + (100 - 64) - 100$$

$$= 82 + (99 + 1 - 64) - 100$$

$$= 82 + (99 - 64) + 1 - 100$$

Another Way to Do Subtraction

$$82 - 64 = 82 + 100 - 100 - 64$$

$$= 82 + (100 - 64) - 100$$

$$= 82 + (99 + 1 - 64) - 100$$

Does not require borrows

$$= 82 + (99 - 64) + 1 - 100$$

9's Complement

(subtract each digit from 9)

$$\begin{array}{r} 99 \\ - 64 \\ \hline 35 \end{array}$$

10's Complement

(subtract each digit from 9 and add 1 to the result)

$$\begin{array}{r} 99 \\ - 64 \\ \hline 35 + 1 = 36 \end{array}$$

Another Way to Do Subtraction

$$82 - 64 = 82 + (99 - 64) + 1 - 100$$

Another Way to Do Subtraction

9's complement

$$82 - 64 = 82 + (99 - 64) + 1 - 100$$

Another Way to Do Subtraction

9's complement

$$\begin{aligned} 82 - 64 &= 82 + (99 - 64) + 1 - 100 \\ &= 82 + 35 + 1 - 100 \end{aligned}$$

Another Way to Do Subtraction

9's complement

$$82 - 64 = 82 + (99 - 64) + 1 - 100$$

10's complement

$$= 82 + (35 + 1) - 100$$

Another Way to Do Subtraction

9's complement

$$82 - 64 = 82 + (99 - 64) + 1 - 100$$

10's complement

$$= 82 + (35 + 1) - 100$$

$$= 82 + 36 - 100$$

Another Way to Do Subtraction


$$\begin{aligned}82 - 64 &= 82 + \overset{\text{9's complement}}{(99 - 64)} + 1 - 100 \\&= 82 + \overset{\text{10's complement}}{(35 + 1)} - 100 \\&= \overset{\text{// Add the first two.}}{(82 + 36)} - 100 \\&= 118 - 100\end{aligned}$$

Another Way to Do Subtraction


$$\begin{aligned}82 - 64 &= 82 + \overset{\text{9's complement}}{(99 - 64)} + 1 - 100 \\&= 82 + \overset{\text{10's complement}}{(35 + 1)} - 100 \\&= \overset{\text{// Add the first two.}}{(82 + 36)} - 100 \\&= \overset{\text{// Just delete the leading 1.}}{\overset{\text{// No need to subtract 100.}}{1}}18 - 100 \\&= 18\end{aligned}$$

Ways to Represent Negative Integers

Formats for representation of integers

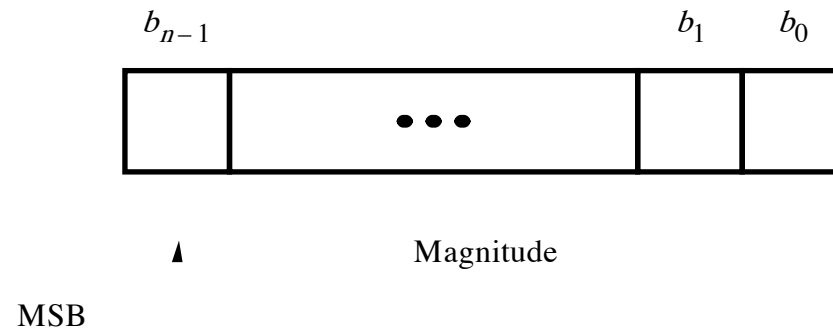

(a) Unsigned number

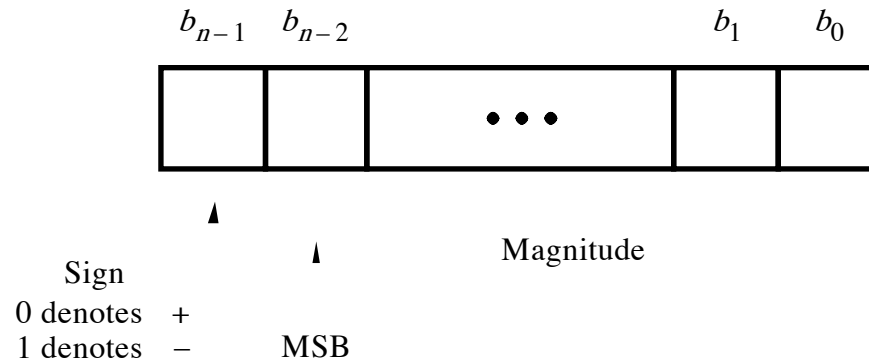

(b) Signed number

[Figure 3.7 from the textbook]

Unsigned Representation

2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
0	0	1	0	1	1	0	0

This represents + 44.

Unsigned Representation

2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
1	0	1	0	1	1	0	0

This represents + 172.

Three Different Methods to Represent Negative Integer Numbers

- **Sign and magnitude**
- **1's complement**
- **2's complement**

Three Different Methods to Represent Negative Integer Numbers

- Sign and magnitude
- 1's complement
- 2's complement

only this method is used
in modern computers

Interpretation of four-bit signed integers

$b_3b_2b_1b_0$	Sign and magnitude	1's complement	2's complement
0111	+7	+7	+7
0110	+6	+6	+6
0101	+5	+5	+5
0100	+4	+4	+4
0011	+3	+3	+3
0010	+2	+2	+2
0001	+1	+1	+1
0000	+0	+0	+0
1000	-0	-7	-8
1001	-1	-6	-7
1010	-2	-5	-6
1011	-3	-4	-5
1100	-4	-3	-4
1101	-5	-2	-3
1110	-6	-1	-2
1111	-7	-0	-1

[Table 3.2 from the textbook]

Interpretation of four-bit signed integers

$b_3b_2b_1b_0$	Sign and magnitude	1's complement	2's complement
0111	+7	+7	+7
0110	+6	+6	+6
0101	+5	+5	+5
0100	+4	+4	+4
0011	+3	+3	+3
0010	+2	+2	+2
0001	+1	+1	+1
0000	+0	+0	+0
1000	-0	-7	-8
1001	-1	-6	-7
1010	-2	-5	-6
1011	-3	-4	-5
1100	-4	-3	-4
1101	-5	-2	-3
1110	-6	-1	-2
1111	-7	-0	-1

The top half is the same in all three representations.

It corresponds to the positive integers.

Interpretation of four-bit signed integers

$b_3b_2b_1b_0$	Sign and magnitude	1's complement	2's complement
0111	+7	+7	+7
0110	+6	+6	+6
0101	+5	+5	+5
0100	+4	+4	+4
0011	+3	+3	+3
0010	+2	+2	+2
0001	+1	+1	+1
0000	+0	+0	+0
1000	-0	-7	-8
1001	-1	-6	-7
1010	-2	-5	-6
1011	-3	-4	-5
1100	-4	-3	-4
1101	-5	-2	-3
1110	-6	-1	-2
1111	-7	-0	-1

In all three representations the first bit represents the sign.
If that bit is 1, then the number is negative.

Interpretation of four-bit signed integers

$b_3b_2b_1b_0$	Sign and magnitude	1's complement	2's complement
0111	+7	+7	+7
0110	+6	+6	+6
0101	+5	+5	+5
0100	+4	+4	+4
0011	+3	+3	+3
0010	+2	+2	+2
0001	+1	+1	+1
0000	+0	+0	+0
1000	-0	-7	-8
1001	-1	-6	-7
1010	-2	-5	-6
1011	-3	-4	-5
1100	-4	-3	-4
1101	-5	-2	-3
1110	-6	-1	-2
1111	-7	-0	-1

Notice that in this representation there are two zeros!

Interpretation of four-bit signed integers

$b_3b_2b_1b_0$	Sign and magnitude	1's complement	2's complement
0111	+7	+7	+7
0110	+6	+6	+6
0101	+5	+5	+5
0100	+4	+4	+4
0011	+3	+3	+3
0010	+2	+2	+2
0001	+1	+1	+1
0000	+0	+0	+0
1000	-0	-7	-8
1001	-1	-6	-7
1010	-2	-5	-6
1011	-3	-4	-5
1100	-4	-3	-4
1101	-5	-2	-3
1110	-6	-1	-2
1111	-7	-0	-1

There are two zeros in this representation as well!

Interpretation of four-bit signed integers

$b_3b_2b_1b_0$	Sign and magnitude	1's complement	2's complement
0111	+7	+7	+7
0110	+6	+6	+6
0101	+5	+5	+5
0100	+4	+4	+4
0011	+3	+3	+3
0010	+2	+2	+2
0001	+1	+1	+1
0000	+0	+0	+0
1000	-0	-7	-8
1001	-1	-6	-7
1010	-2	-5	-6
1011	-3	-4	-5
1100	-4	-3	-4
1101	-5	-2	-3
1110	-6	-1	-2
1111	-7	-0	-1

In this representation there is one more negative number.

Method #1:

**Sign and Magnitude
Representation**

Sign and Magnitude Representation (using the left-most bit as the sign)

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0
0	0	1	0	1	1	0	0


This represents + 44.

Sign and Magnitude Representation (using the left-most bit as the sign)


sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0
1	0	1	0	1	1	0	0

This represents -44 .

Circuit for negating a number stored in sign and magnitude representation

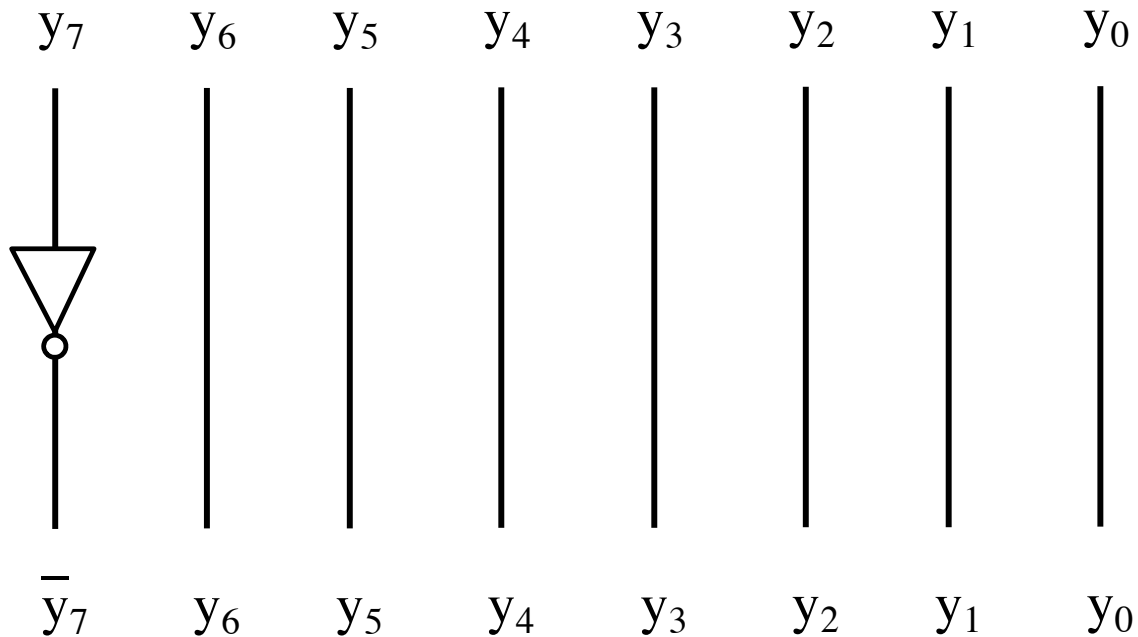

Circuit for negating a number stored in sign and magnitude representation

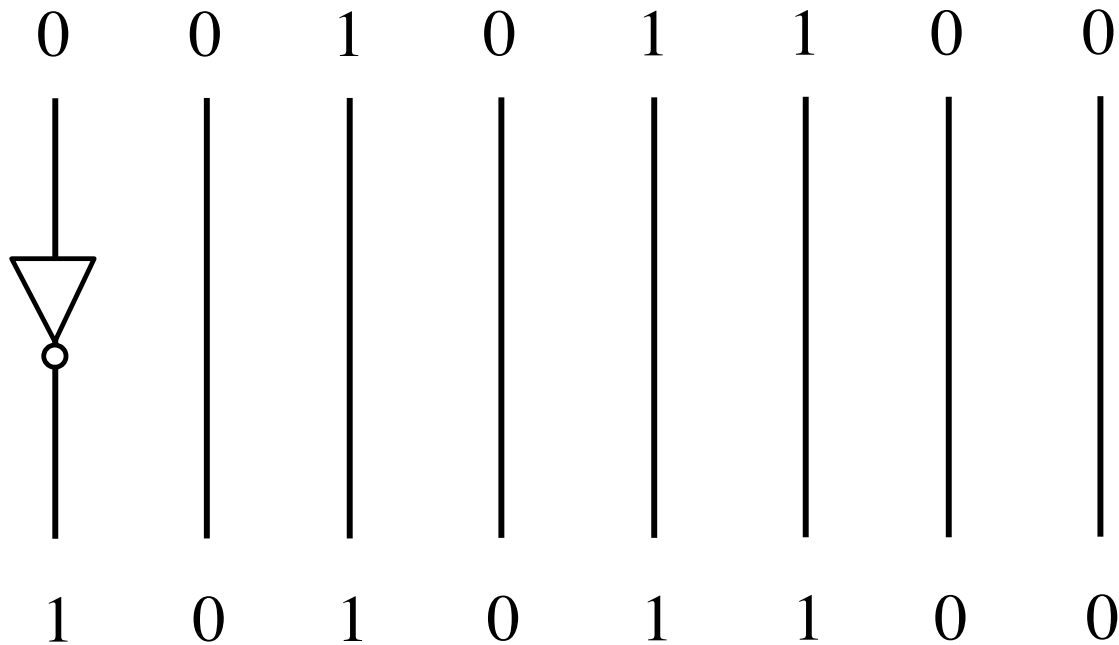

Method #2:

**1's Complement
Representation**

1' s complement (subtract each digit from 1)

Let K be the negative equivalent of an n-bit positive number P.

Then, in 1' s complement representation K is obtained by subtracting P from $2^n - 1$, namely

$$K = (2^n - 1) - P$$

This means that K can be obtained by inverting all bits of P.

1' s complement (subtract each digit from 1)

Let K be the negative equivalent of an 8-bit positive number P.

Then, in 1' s complement representation K is obtained by subtracting P from $2^8 - 1$, namely

$$K = (2^8 - 1) - P = 255 - P$$


This means that K can be obtained by inverting all bits of P.

Provided that P is between 0 and 127, because the most significant bit must be zero to indicate that it is positive.


1's Complement Representation

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0
0	0	1	0	1	1	0	0

1's Complement Representation

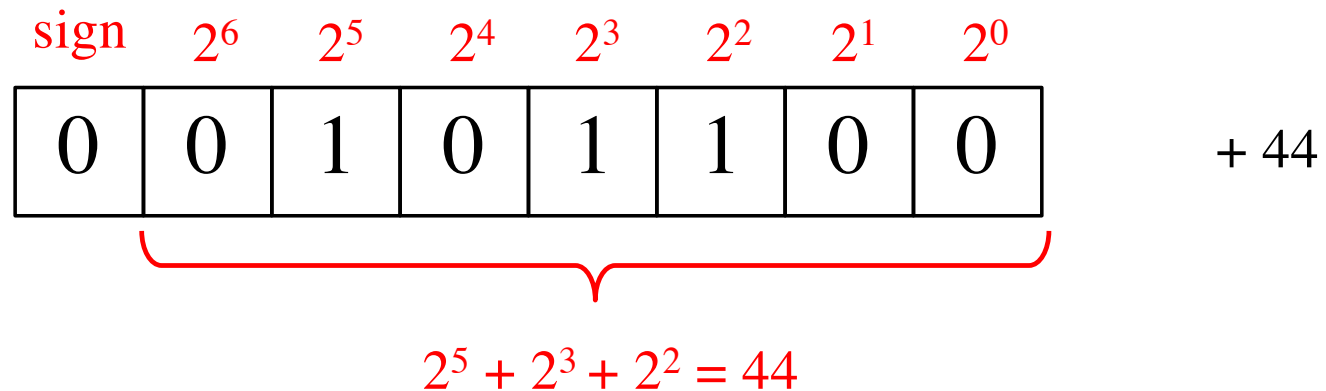

1's Complement Representation

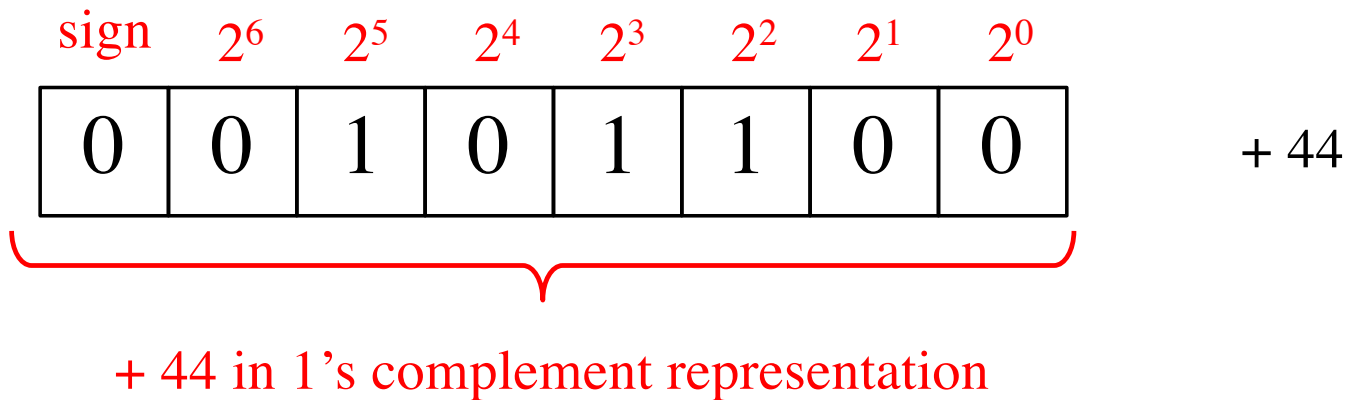

1's Complement Representation



(invert all the bits to negate the number)

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
0	0	1	0	1	1	0	0	+ 44

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
1	1	0	1	0	0	1	1	- 44

1's Complement Representation

(invert all the bits to negate the number)

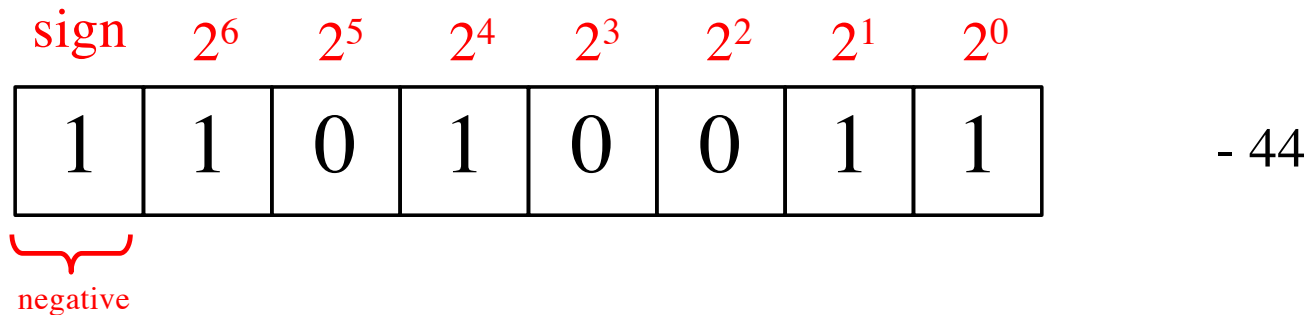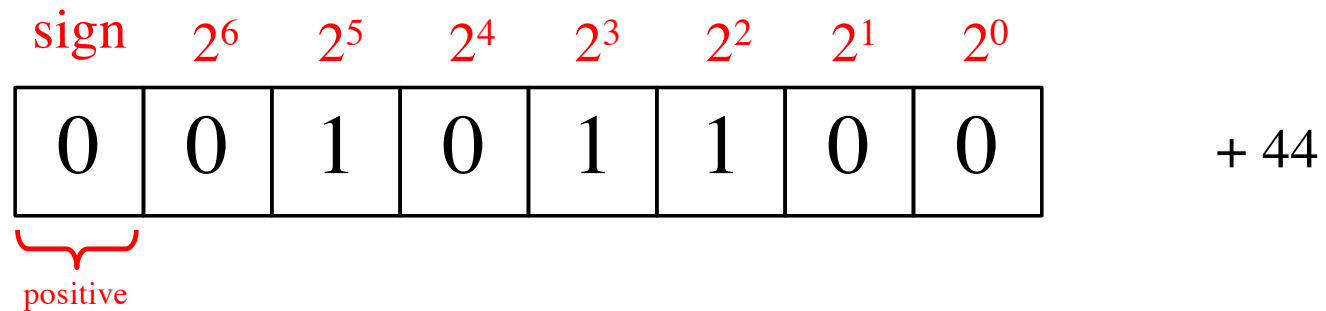

1's Complement Representation

(invert all the bits to negate the number)

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
0	0	1	0	1	1	0	0	+ 44

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
1	1	0	1	0	0	1	1	- 44



$$2^7 + 2^6 + 2^4 + 2^1 + 2^0 = 211 \text{ (as unsigned)}$$

1's Complement Representation

(invert all the bits to negate the number)

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
0	0	1	0	1	1	0	0	+ 44

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
1	1	0	1	0	0	1	1	- 44



$$211 = 255 - 44 \text{ (as unsigned)}$$

1's Complement Representation

(invert all the bits to negate the number)

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
0	0	1	0	1	1	0	0	+ 44

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
1	1	0	1	0	0	1	1	- 44



- 44 in 1's complement representation

1's complement (subtract each digit from 1)

1	1	1	1	1	1	1	1
0	0	1	0	1	1	0	0
1	1	0	1	0	0	1	1

1's complement (subtract each digit from 1)

No need to borrow!

$$\begin{array}{r} \\ 1 \\ - 0 \\ \hline 1 \end{array}$$

1's complement

(subtract each digit from 1)

	1	1	1	1	1	1	1	255
-	0	0	1	0	1	1	0	44
	1	1	0	1	0	0	1	1

1' s complement (subtract each digit from 1)

$$\begin{array}{r} 1 1 1 1 1 1 1 \\ - 0 0 1 0 1 1 0 0 \\ \hline 1 1 0 1 0 0 1 1 \end{array}$$

211

$$211 = 255 - 44 \text{ (as unsigned)}$$

1's complement (subtract each digit from 1)

	1	1	1	1	1	1	1	1
—								
	0	0	1	0	1	1	0	0
	1	1	0	1	0	0	1	1


- 44

$211 = 255 - 44$ (as unsigned)


or

- 44 in 1's complement representation

Circuit for negating a number stored in 1's complement representation

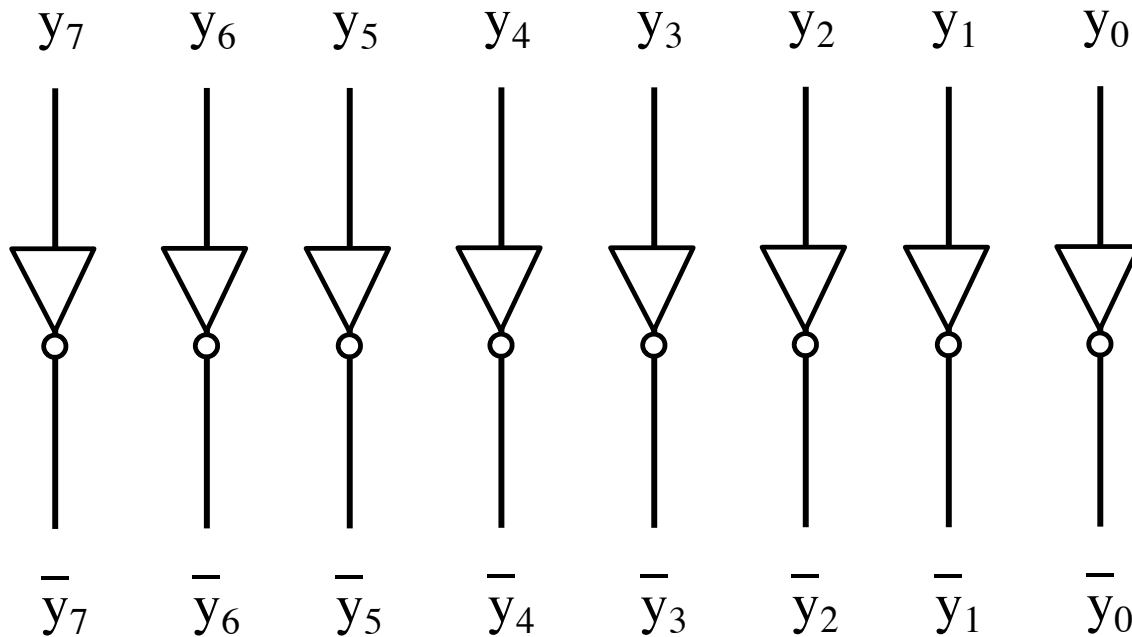

Circuit for negating a number stored in 1's complement representation

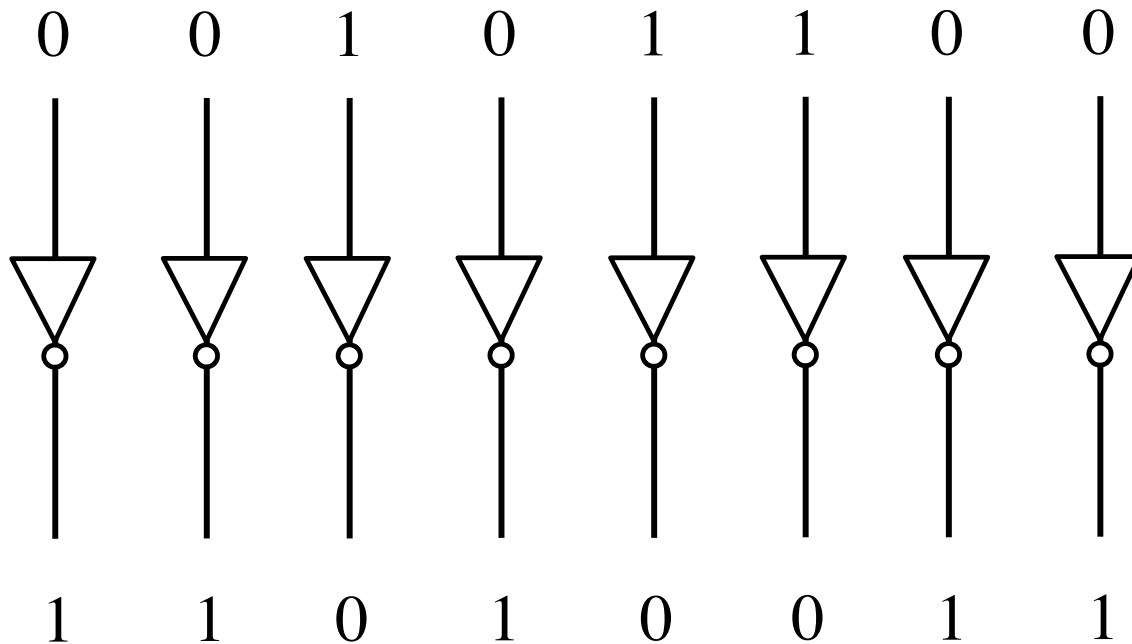

**This works in reverse too
(from negative to positive)**

1's Complement Representation

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0
1	1	0	1	0	0	1	1

- 44

1's Complement Representation



(invert all the bits to negate the number)

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
1	1	0	1	0	0	1	1	- 44

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
0	0	1	0	1	1	0	0	+ 44



1's Complement Representation

(invert all the bits to negate the number)

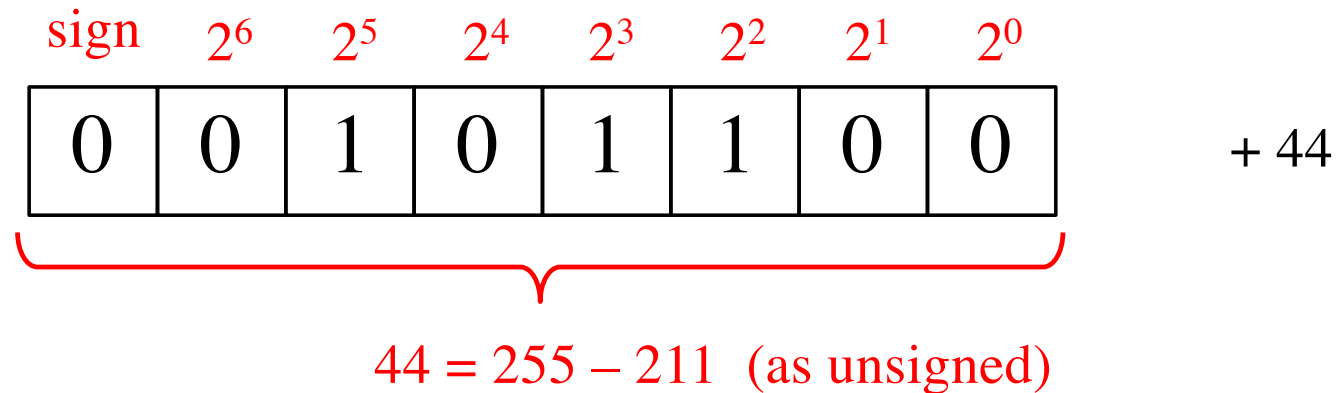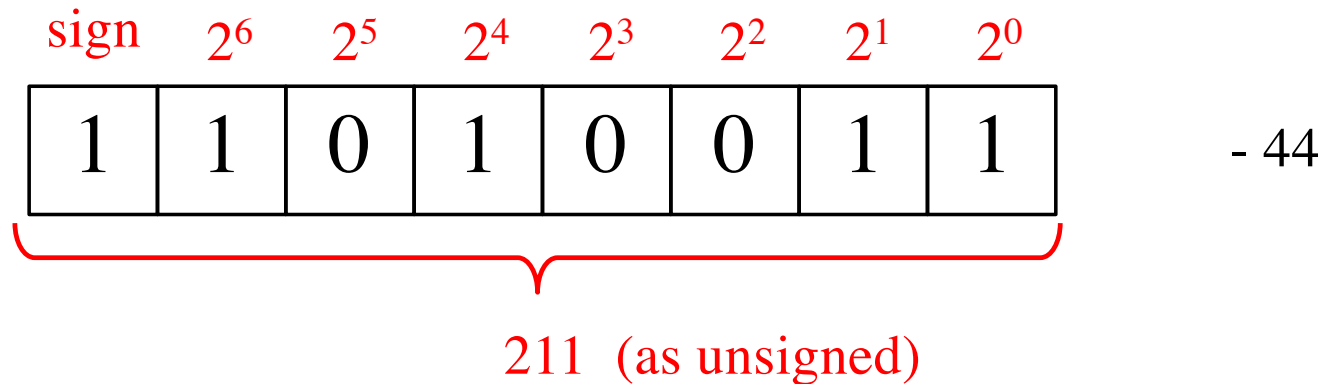

1's Complement Representation

(invert all the bits to negate the number)

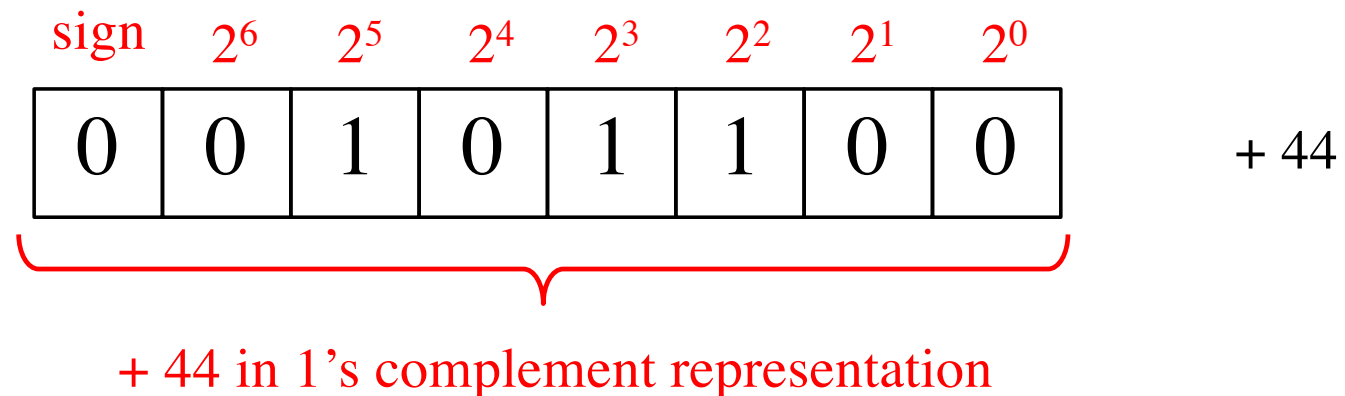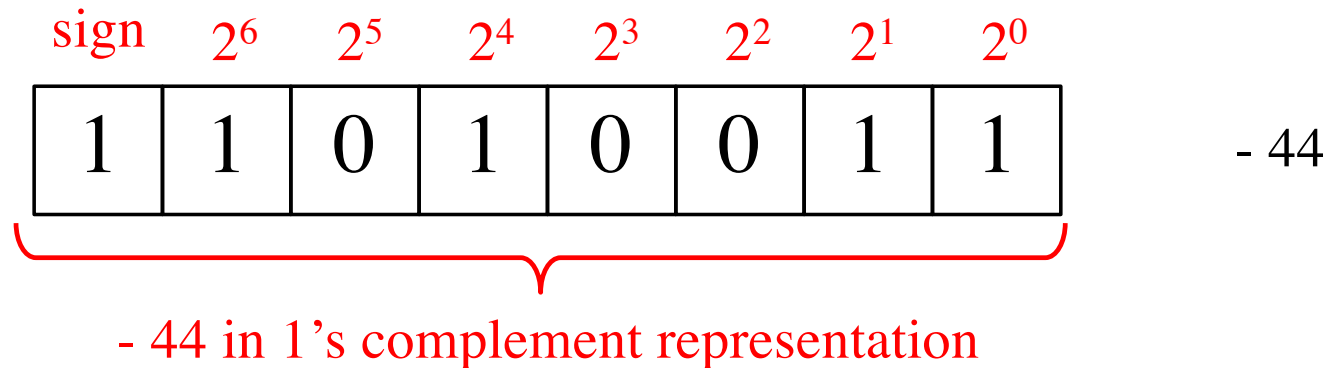

**Negate these numbers stored in
1's complement representation**

0 1 0 1

1 0 1 1

1 1 1 0

0 1 1 1

Negate these numbers stored in 1's complement representation

0 1 0 1

1 0 1 0

1 0 1 1

0 1 0 0

1 1 1 0

0 0 0 1

0 1 1 1

1 0 0 0

Just flip 1's to 0's and vice versa.

Negate these numbers stored in 1's complement representation

$$0\ 1\ 0\ 1 = +5$$

$$1\ 0\ 1\ 0 = -5$$

$$1\ 0\ 1\ 1 = -4$$

$$0\ 1\ 0\ 0 = +4$$

$$1\ 1\ 1\ 0 = -1$$

$$0\ 0\ 0\ 1 = +1$$

$$0\ 1\ 1\ 1 = +7$$

$$1\ 0\ 0\ 0 = -7$$

Just flip 1's to 0's and vice versa.

Addition of two numbers stored in 1's complement representation

There are four cases to consider

- $(+5) + (+2)$
- $(-5) + (+2)$
- $(+5) + (-2)$
- $(-5) + (-2)$

There are four cases to consider

- $(+5) + (+2)$ positive plus positive
- $(-5) + (+2)$ negative plus positive
- $(+5) + (-2)$ positive plus negative
- $(-5) + (-2)$ negative plus negative

A) Example of 1's complement addition

$$\begin{array}{r}
 (+5) \quad 0101 \\
 +(+2) \quad +0010 \\
 \hline
 (+7) \quad 0111
 \end{array}$$

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

[Figure 3.8 from the textbook]

A) Example of 1's complement addition

$$\begin{array}{r}
 (+5) \\
 + (+2) \\
 \hline
 (+7)
 \end{array}
 \quad
 \begin{array}{r}
 \textcolor{red}{0101} \\
 + \textcolor{green}{0010} \\
 \hline
 \textcolor{blue}{0111}
 \end{array}$$

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

B) Example of 1's complement addition

$$\begin{array}{r}
 (-5) \\
 +(+2) \\
 \hline
 (-3)
 \end{array}
 \quad
 \begin{array}{r}
 1010 \\
 +0010 \\
 \hline
 1100
 \end{array}$$

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

[Figure 3.8 from the textbook]

B) Example of 1's complement addition

$$\begin{array}{r}
 (-5) \\
 + (+2) \\
 \hline
 (-3)
 \end{array}
 \quad
 \begin{array}{r}
 \textcolor{red}{1010} \\
 + \textcolor{green}{0010} \\
 \hline
 \textcolor{blue}{1100}
 \end{array}$$

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

C) Example of 1's complement addition

$$\begin{array}{r}
 (+5) \quad 0101 \\
 +(-2) \quad +1101 \\
 \hline
 (+3) \quad 10010
 \end{array}$$

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

[Figure 3.8 from the textbook]

C) Example of 1's complement addition

$$\begin{array}{r}
 (+5) \\
 +(-2) \\
 \hline
 (+3)
 \end{array}
 \quad
 \begin{array}{r}
 \begin{array}{cccc} 0 & 1 & 0 & 1 \end{array} \\
 + \begin{array}{cccc} 1 & 1 & 0 & 1 \end{array} \\
 \hline
 1 \begin{array}{cccc} 0 & 0 & 1 & 0 \end{array}
 \end{array}$$

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

C) Example of 1's complement addition

$$\begin{array}{r}
 (+5) \\
 +(-2) \\
 \hline
 (+3)
 \end{array}
 \quad
 \begin{array}{r}
 \begin{array}{cccc} 0 & 1 & 0 & 1 \end{array} \\
 + \begin{array}{cccc} 1 & 1 & 0 & 1 \end{array} \\
 \hline
 1 \begin{array}{cccc} 0 & 0 & 1 & 0 \end{array}
 \end{array}$$

But this is 2!

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

C) Example of 1's complement addition

$$\begin{array}{r}
 (+5) \quad 0101 \\
 +(-2) \quad +1101 \\
 \hline
 (+3) \quad 10010 \\
 \quad \quad \quad \text{⌞} \rightarrow 1 \\
 \quad \quad \quad \hline
 \quad \quad \quad 0011
 \end{array}$$

We need to perform one more addition to get the result.

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

C) Example of 1's complement addition

$$\begin{array}{r}
 (+5) \quad 0101 \\
 +(-2) \quad +1101 \\
 \hline
 (+3) \quad 10010 \\
 \quad \quad \quad \text{1} \quad \text{0010} \\
 \quad \quad \quad \text{1} \quad \text{0011}
 \end{array}$$

We need to perform one more addition to get the result.

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

D) Example of 1's complement addition

$$\begin{array}{r}
 (-5) \\
 + (-2) \\
 \hline
 (-7)
 \end{array}
 \quad
 \begin{array}{r}
 1\ 0\ 1\ 0 \\
 + 1\ 1\ 0\ 1 \\
 \hline
 1\ 0\ 1\ 1\ 1
 \end{array}$$

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

[Figure 3.8 from the textbook]

D) Example of 1's complement addition

$$\begin{array}{r}
 (-5) \\
 + (-2) \\
 \hline
 (-7)
 \end{array}
 \quad
 \begin{array}{r}
 \begin{array}{cccc}
 1 & 0 & 1 & 0 \\
 1 & 1 & 0 & 1 \\
 \hline
 1 & 0 & 1 & 1
 \end{array}
 \end{array}$$

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

D) Example of 1's complement addition

$$\begin{array}{r} (-5) \\ + (-2) \\ \hline (-7) \end{array}$$

$$\begin{array}{r} 1010 \\ + 1101 \\ \hline 10111 \end{array}$$

But this is +7!

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

D) Example of 1's complement addition

$$\begin{array}{r}
 (-5) \\
 + (-2) \\
 \hline
 (-7)
 \end{array}
 \qquad
 \begin{array}{r}
 1\ 0\ 1\ 0 \\
 + 1\ 1\ 0\ 1 \\
 \hline
 1\ 0\ 1\ 1\ 1 \\
 \text{⌞} \rightarrow 1 \\
 \hline
 1\ 0\ 0\ 0
 \end{array}$$

We need to perform one more addition to get the result.

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

D) Example of 1's complement addition

$$\begin{array}{r}
 (-5) \\
 + (-2) \\
 \hline
 (-7)
 \end{array}
 \qquad
 \begin{array}{r}
 1\ 0\ 1\ 0 \\
 + 1\ 1\ 0\ 1 \\
 \hline
 1\ 0\ 1\ 1\ 1 \\
 \text{⌋} \quad \text{⌋} \quad \text{⌋} \quad \text{⌋} \quad \text{⌋} \\
 \text{⌋} \quad \text{⌋} \quad \text{⌋} \quad \text{⌋} \quad \text{⌋} \\
 \hline
 1\ 0\ 0\ 0
 \end{array}$$

We need to perform one more addition to get the result.

$b_3b_2b_1b_0$	1's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-7
1001	-6
1010	-5
1011	-4
1100	-3
1101	-2
1110	-1
1111	-0

Implications for arithmetic operations in 1's complement representation

- **We could do addition in 1's complement, but the circuit will need to handle these exceptions.**
- **In some cases, it will run faster than others, thus creating uncertainties in the timing.**
- **Therefore, 1's complement is not used in practice to do arithmetic operations.**
- **But it may show up as an intermediary step in doing 2's complement operations.**

Method #3:

**2's Complement
Representation**

2' s complement

(subtract each digit from 1 and add 1 to the result)

Let K be the negative equivalent of an n-bit positive number P.

Then, in 2' s complement representation K is obtained by subtracting P from 2^n , namely

$$K = 2^n - P$$

2' s complement

(subtract each digit from 1 and add 1 to the result)

Let K be the negative equivalent of an 8-bit positive number P.

Then, in 2' s complement representation K is obtained by subtracting P from 2^8 , namely

$$K = 2^8 - P = 256 - P$$

2's Complement Representation



sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
0	0	1	0	1	1	0	0	+ 44

2's Complement Representation

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
0	0	1	0	1	1	0	0	+ 44

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0	
1	1	0	1	0	1	0	0	- 44

2's Complement Representation

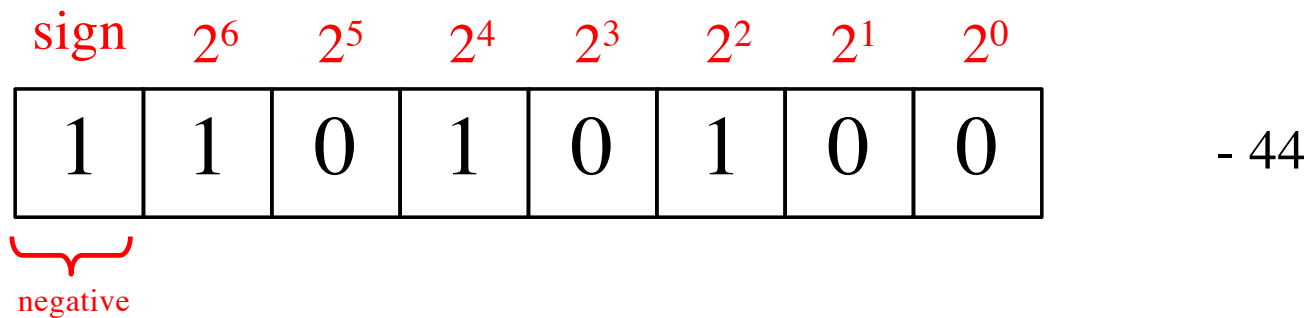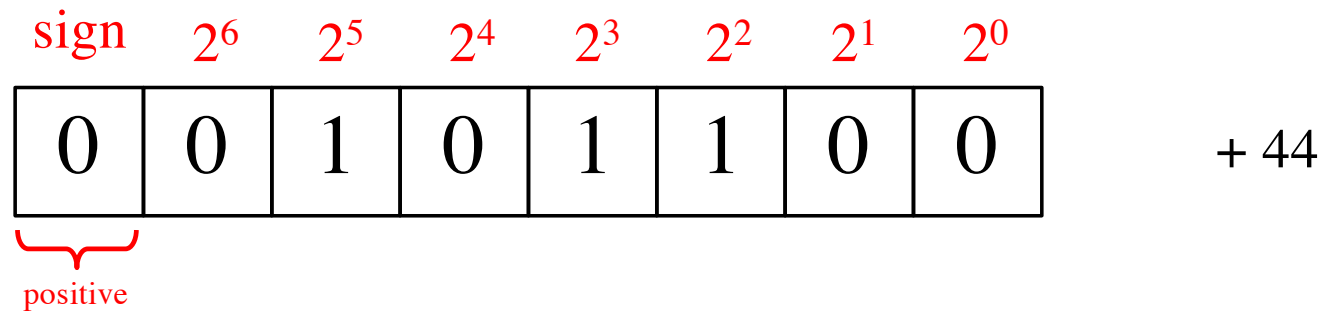

2's Complement Representation

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0
0	0	1	0	1	1	0	0

+ 44

sign	2^6	2^5	2^4	2^3	2^2	2^1	2^0
1	1	0	1	0	1	0	0

- 44



$$212 = 256 - 44$$

Deriving 2' s complement

For a positive n-bit number P, let K_1 and K_2 denote its 1' s and 2' s complements, respectively.

$$K_1 = (2^n - 1) - P$$

$$K_2 = 2^n - P$$

Since $K_2 = K_1 + 1$, it is evident that in a logic circuit the 2' s complement can be computed by inverting all bits of P and then adding 1 to the resulting 1' s-complement number.

Deriving 2' s complement

For a positive 8-bit number P , let K_1 and K_2 denote its 1' s and 2' s complements, respectively.

$$K_1 = (2^n - 1) - P = 255 - P$$

$$K_2 = 2^n - P = 256 - P$$

Since $K_2 = K_1 + 1$, it is evident that in a logic circuit the 2' s complement can be computed by inverting all bits of P and then adding 1 to the resulting 1' s-complement number.

**Negate these numbers stored in
2's complement representation**

0 1 0 1

1 1 1 0

1 1 0 0

0 1 1 1

Negate these numbers stored in 2's complement representation

0 1 0 1

1 0 1 0

1 1 1 0

0 0 0 1

1 1 0 0

0 0 1 1

0 1 1 1

1 0 0 0

Invert all bits...

Negate these numbers stored in 2's complement representation

$$\begin{array}{r} 0101 \\ + 1010 \\ + 1 \\ \hline 1011 \end{array}$$

$$\begin{array}{r} 1110 \\ + 0001 \\ + 1 \\ \hline 0010 \end{array}$$

$$\begin{array}{r} 1100 \\ + 0011 \\ + 1 \\ \hline 0100 \end{array}$$

$$\begin{array}{r} 0111 \\ + 1000 \\ + 1 \\ \hline 1001 \end{array}$$

.. then add 1.

Negate these numbers stored in 2's complement representation


$$\begin{array}{r} 0101 = +5 \\ + 1010 \\ \hline 1011 = -5 \end{array}$$

$$\begin{array}{r} 1110 = -2 \\ + 0001 \\ \hline 0010 = +2 \end{array}$$


$$\begin{array}{r} 1100 = -4 \\ + 0011 \\ \hline 0100 = +4 \end{array}$$

$$\begin{array}{r} 0111 = +7 \\ + 1000 \\ \hline 1001 = -7 \end{array}$$


Circuit #1 for negating a number stored in 2's complement representation

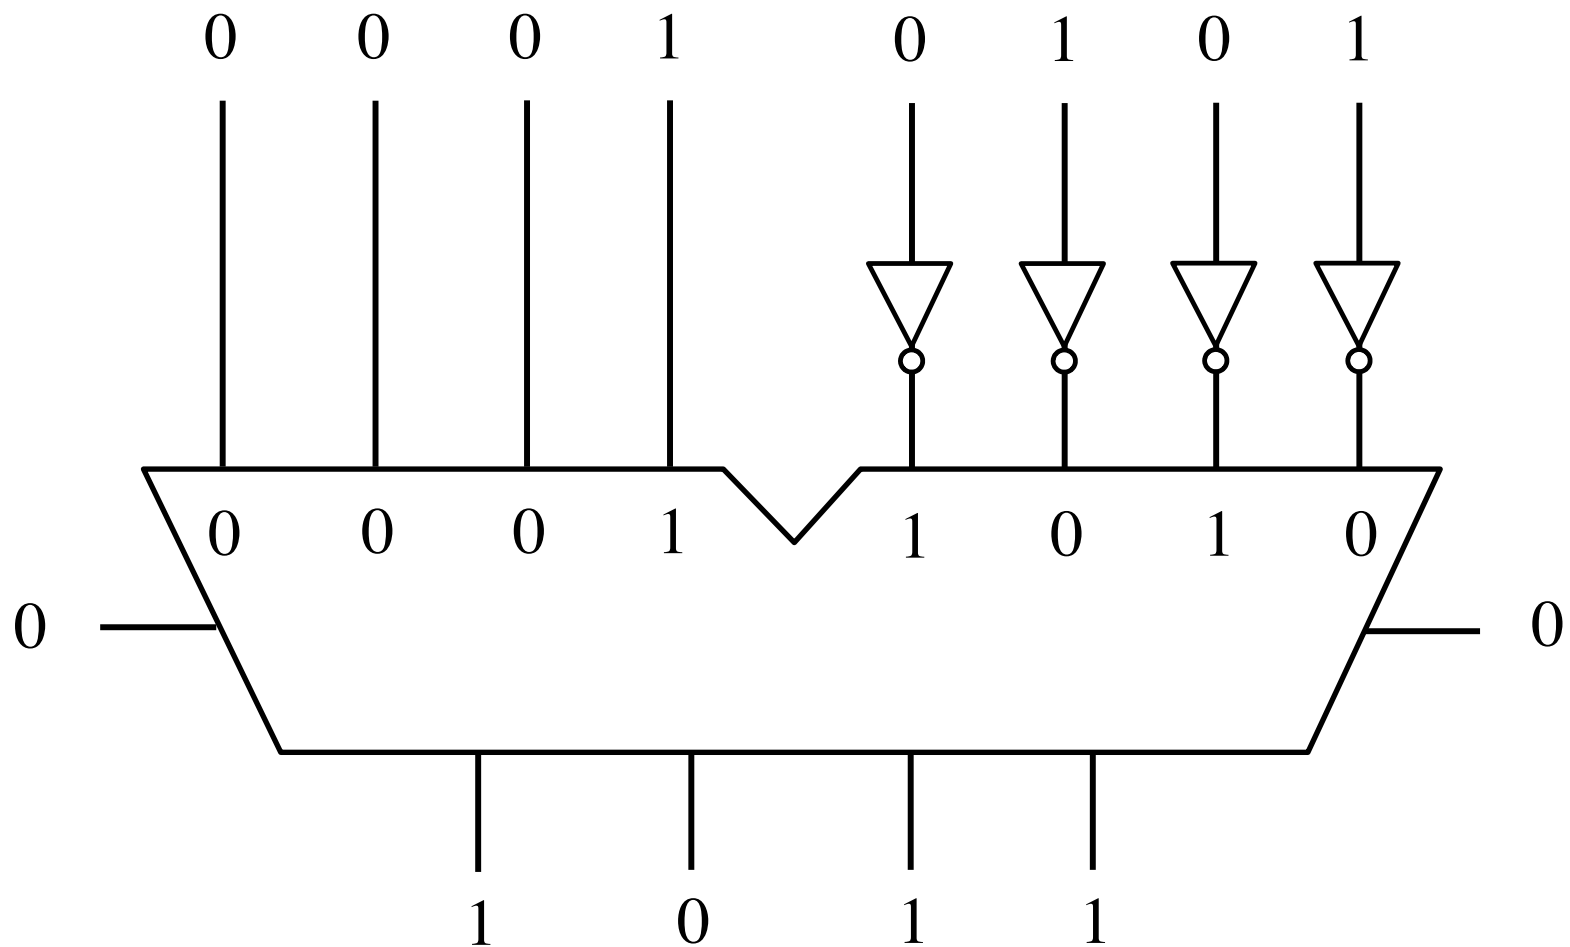


Circuit #1 for negating a number stored in 2's complement representation

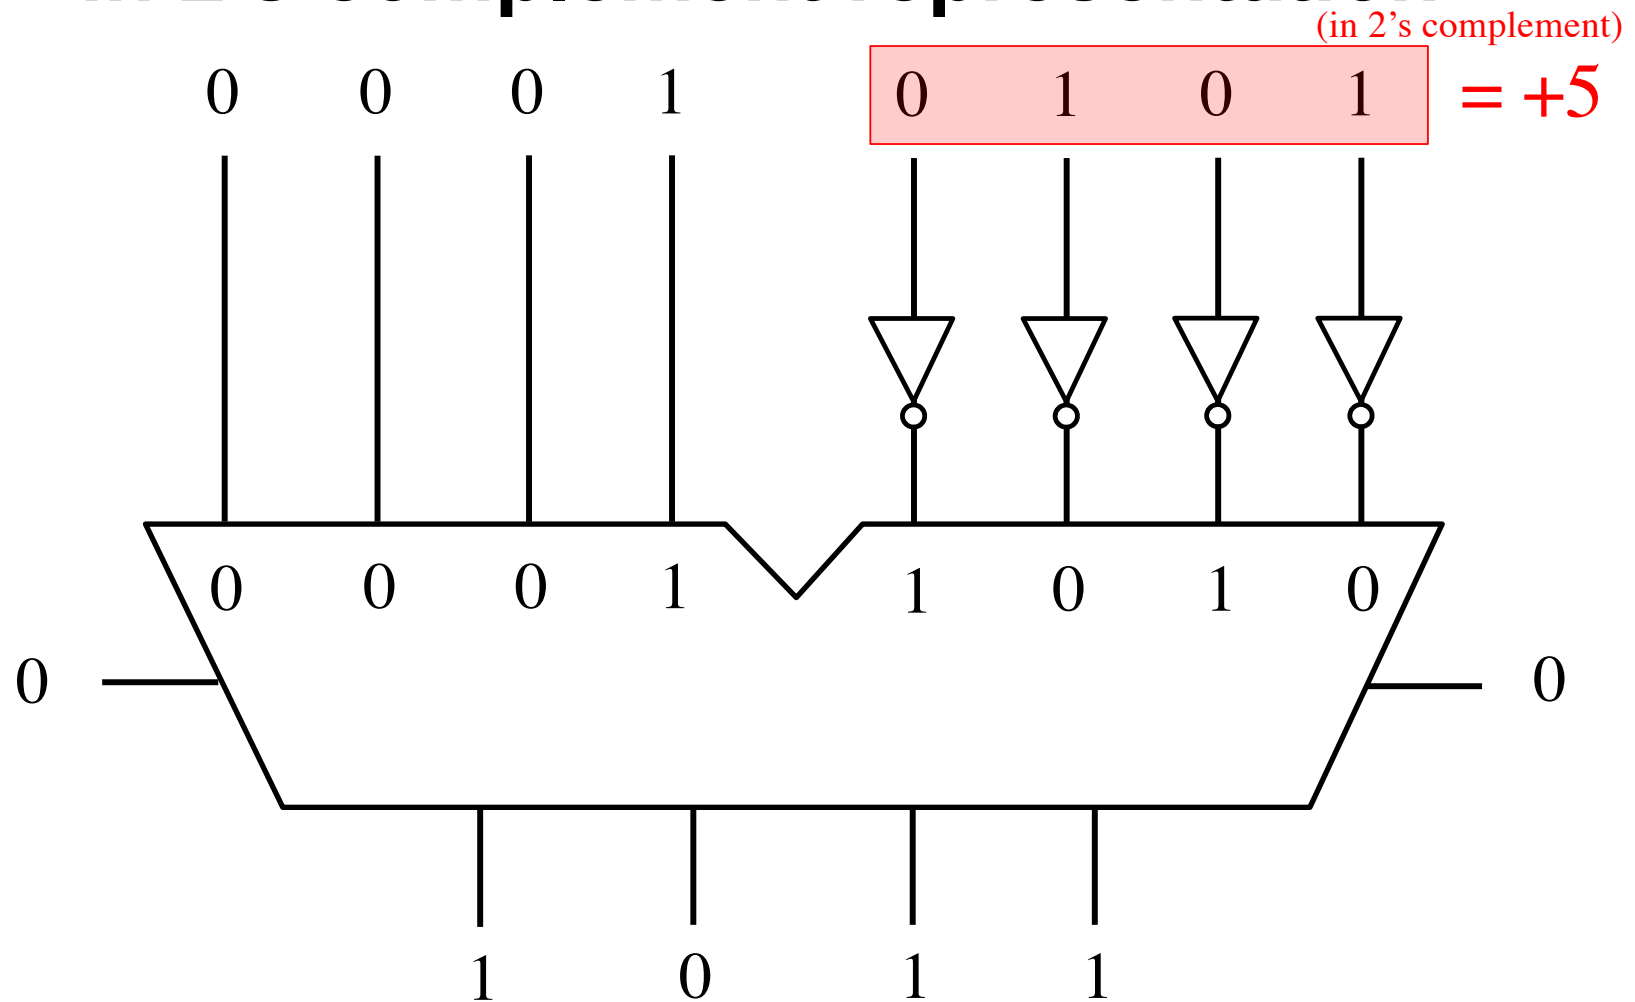


Circuit #1 for negating a number stored in 2's complement representation

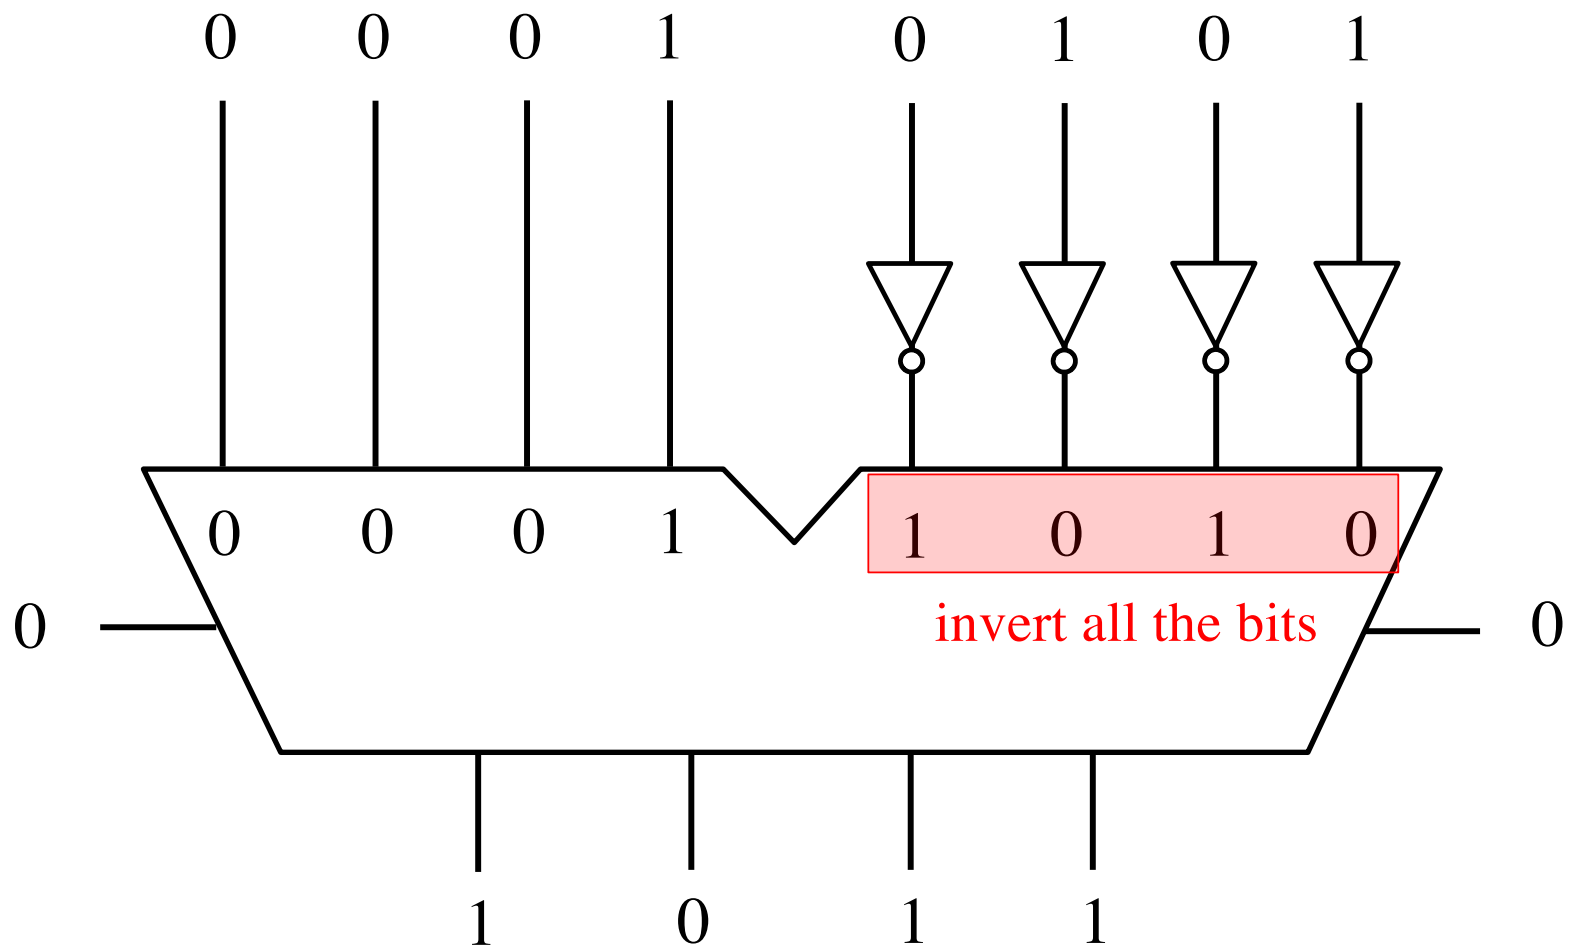

Circuit #1 for negating a number stored in 2's complement representation

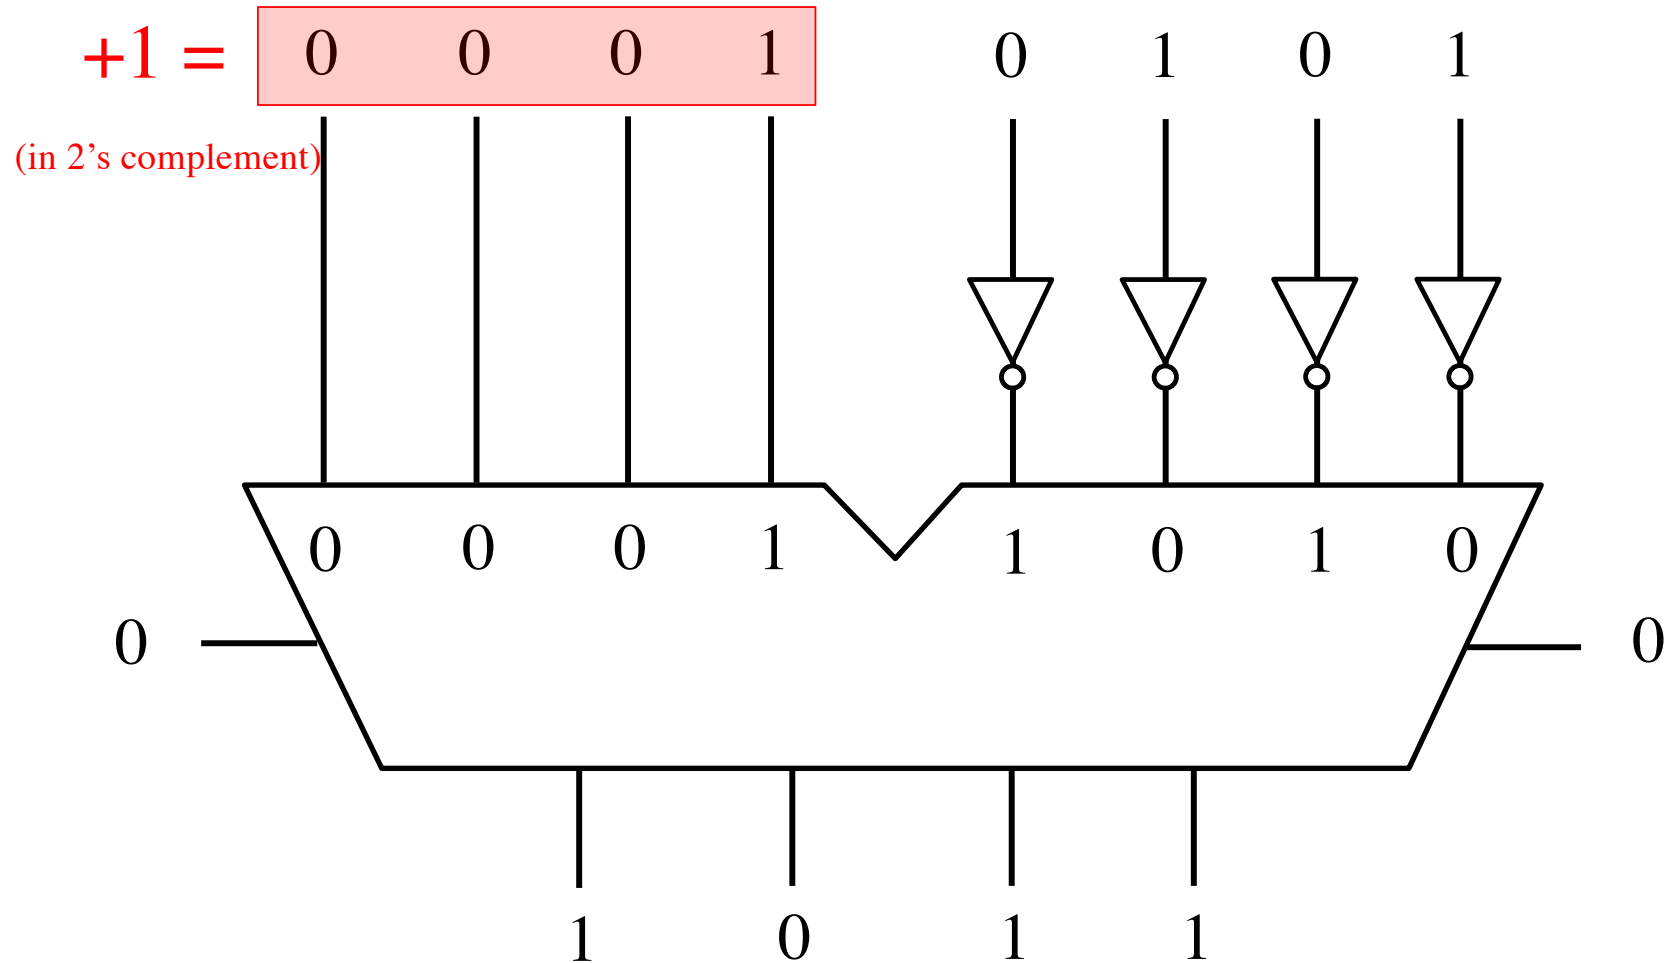


Circuit #1 for negating a number stored in 2's complement representation

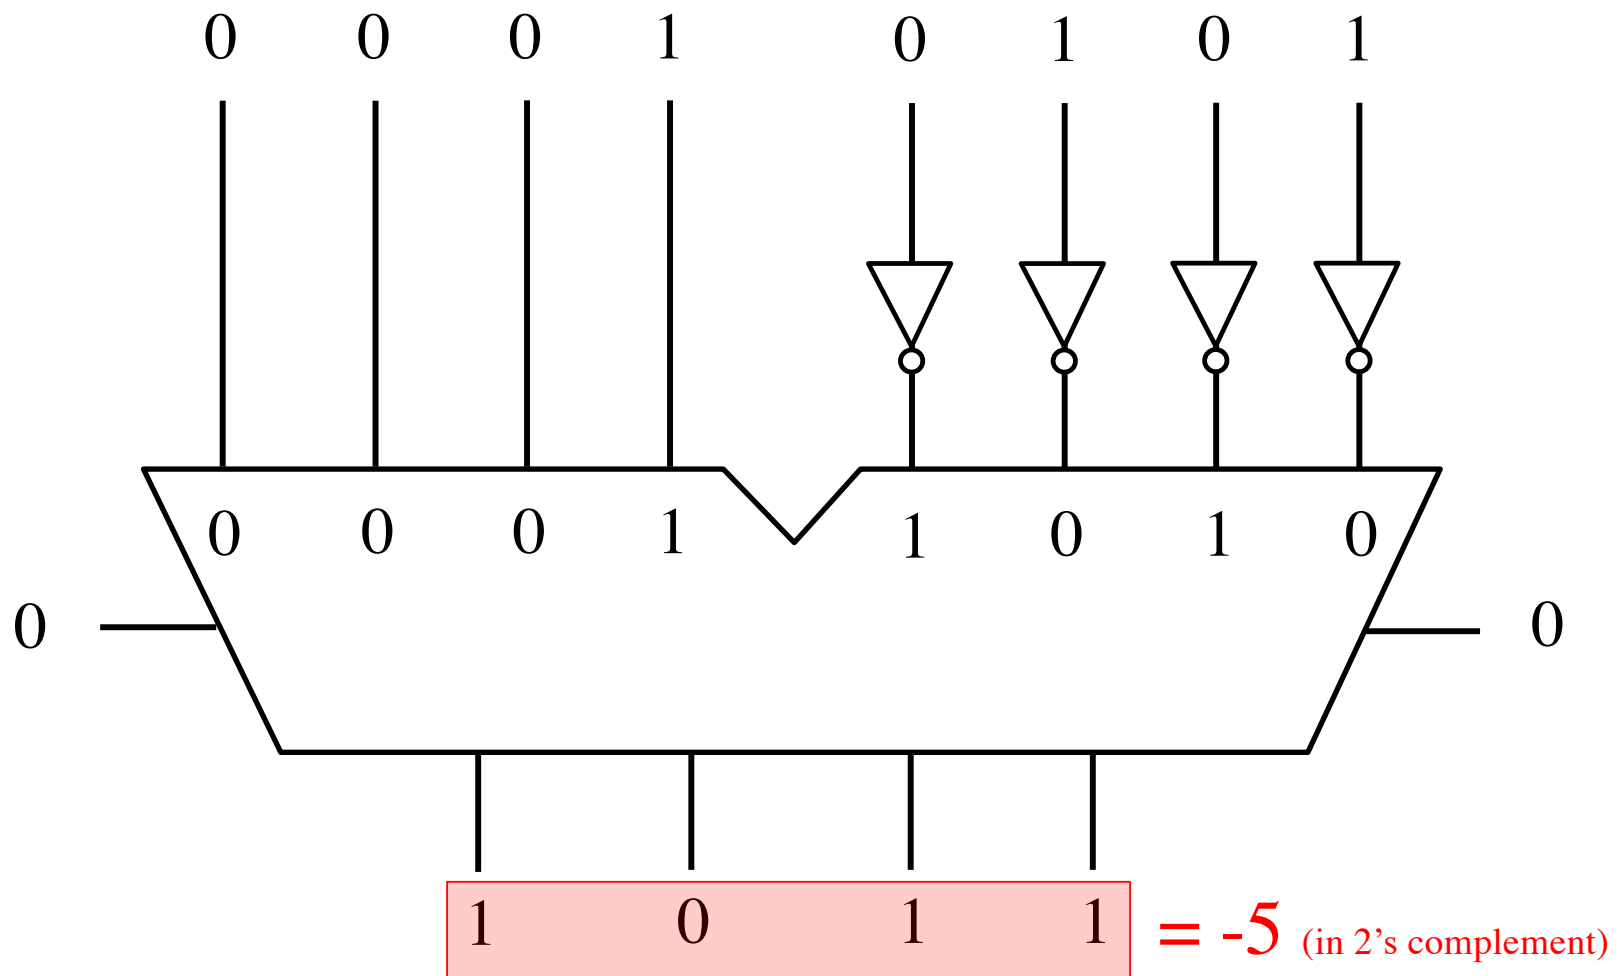


Alternative Circuit


Circuit #2 for negating a number stored in 2's complement representation

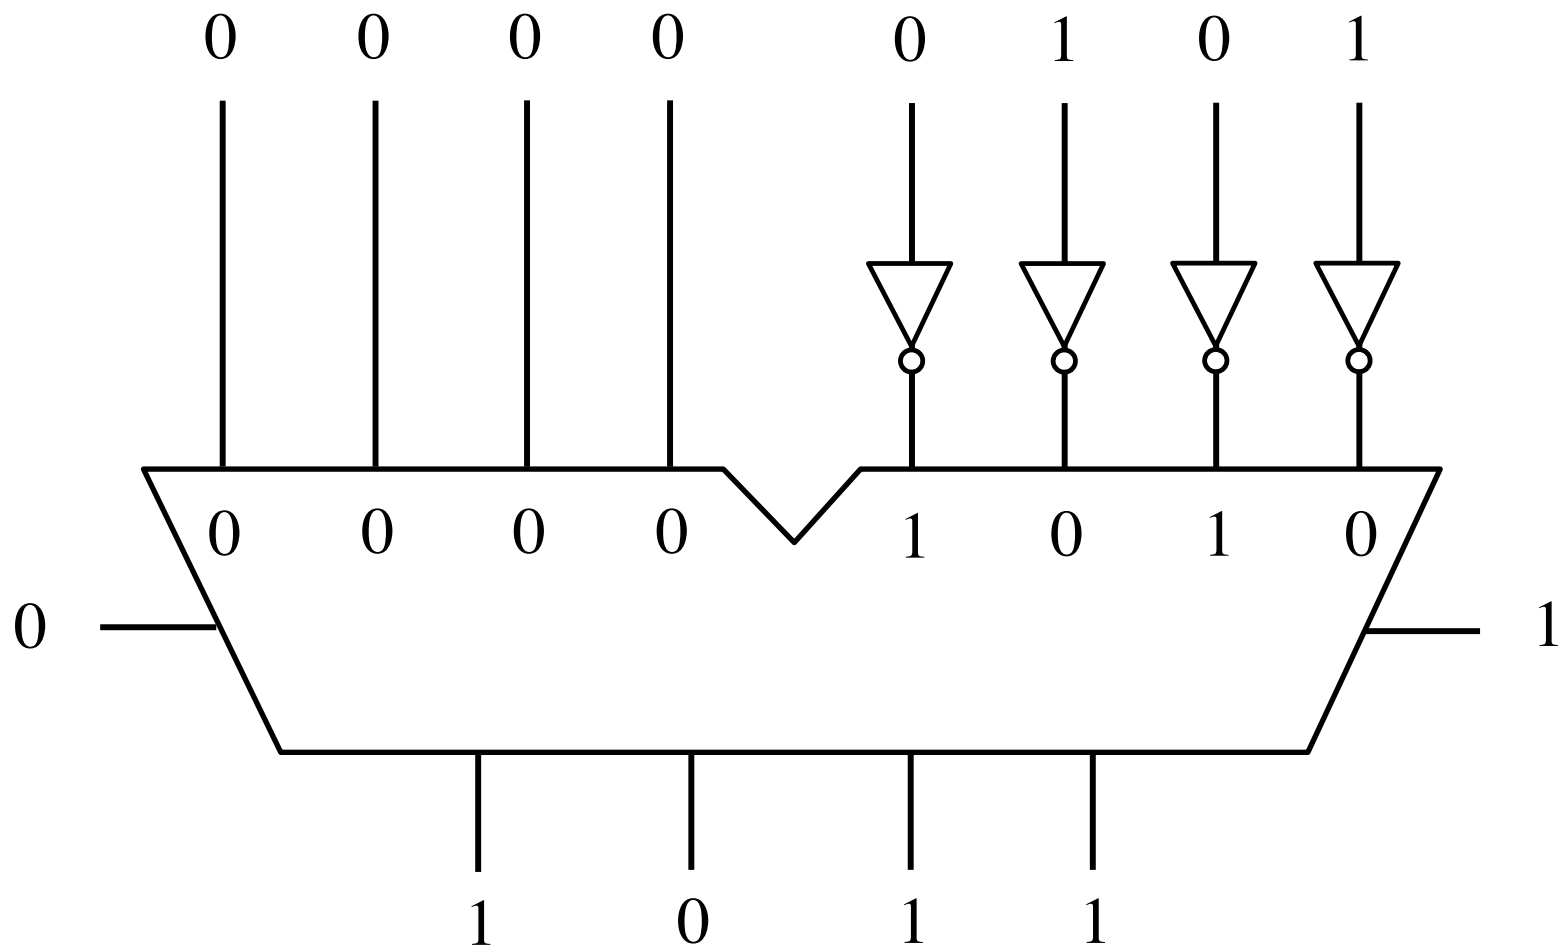


Circuit #2 for negating a number stored in 2's complement representation

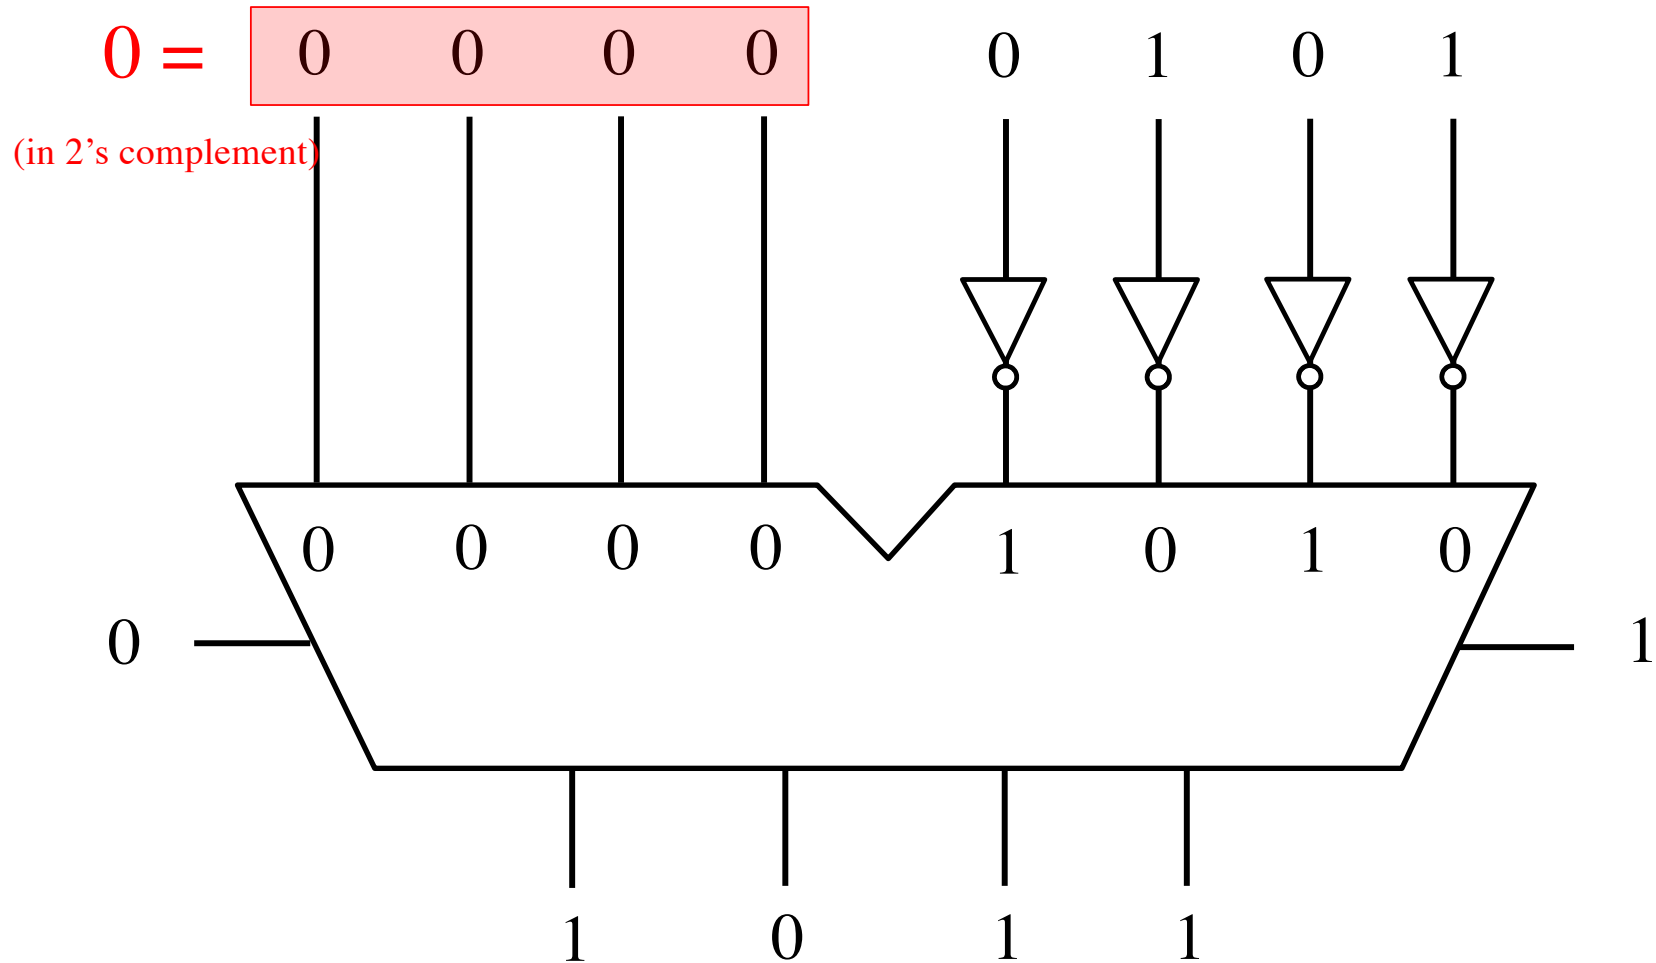


Circuit #2 for negating a number stored in 2's complement representation

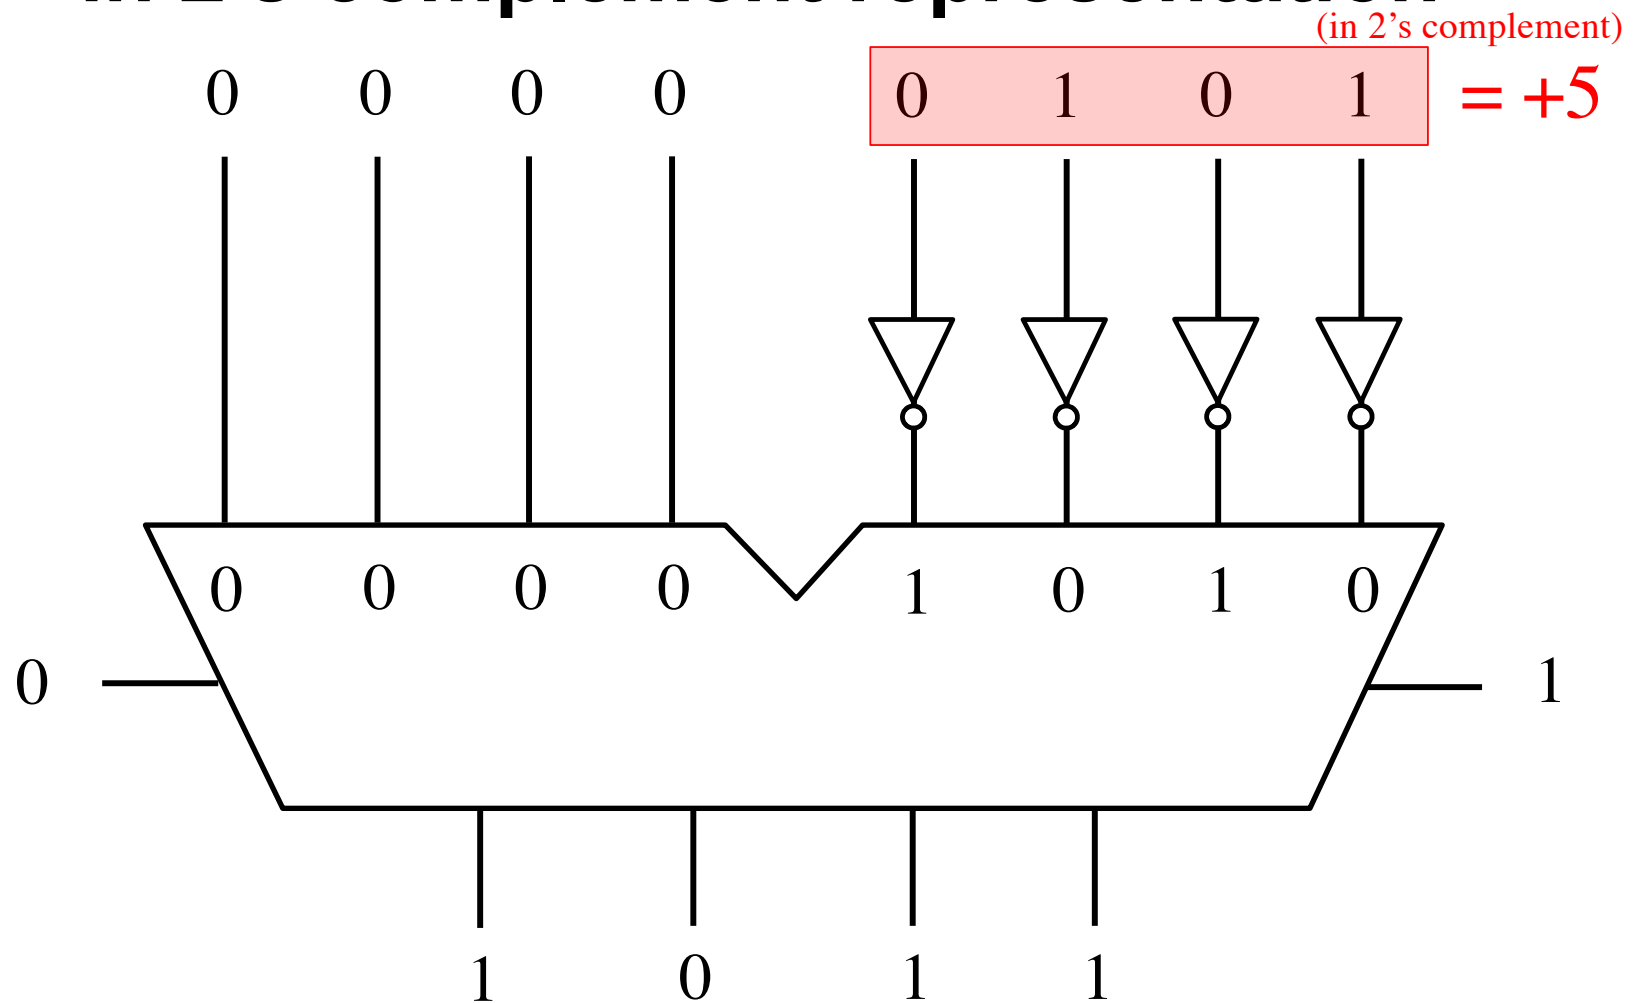


Circuit #2 for negating a number stored in 2's complement representation

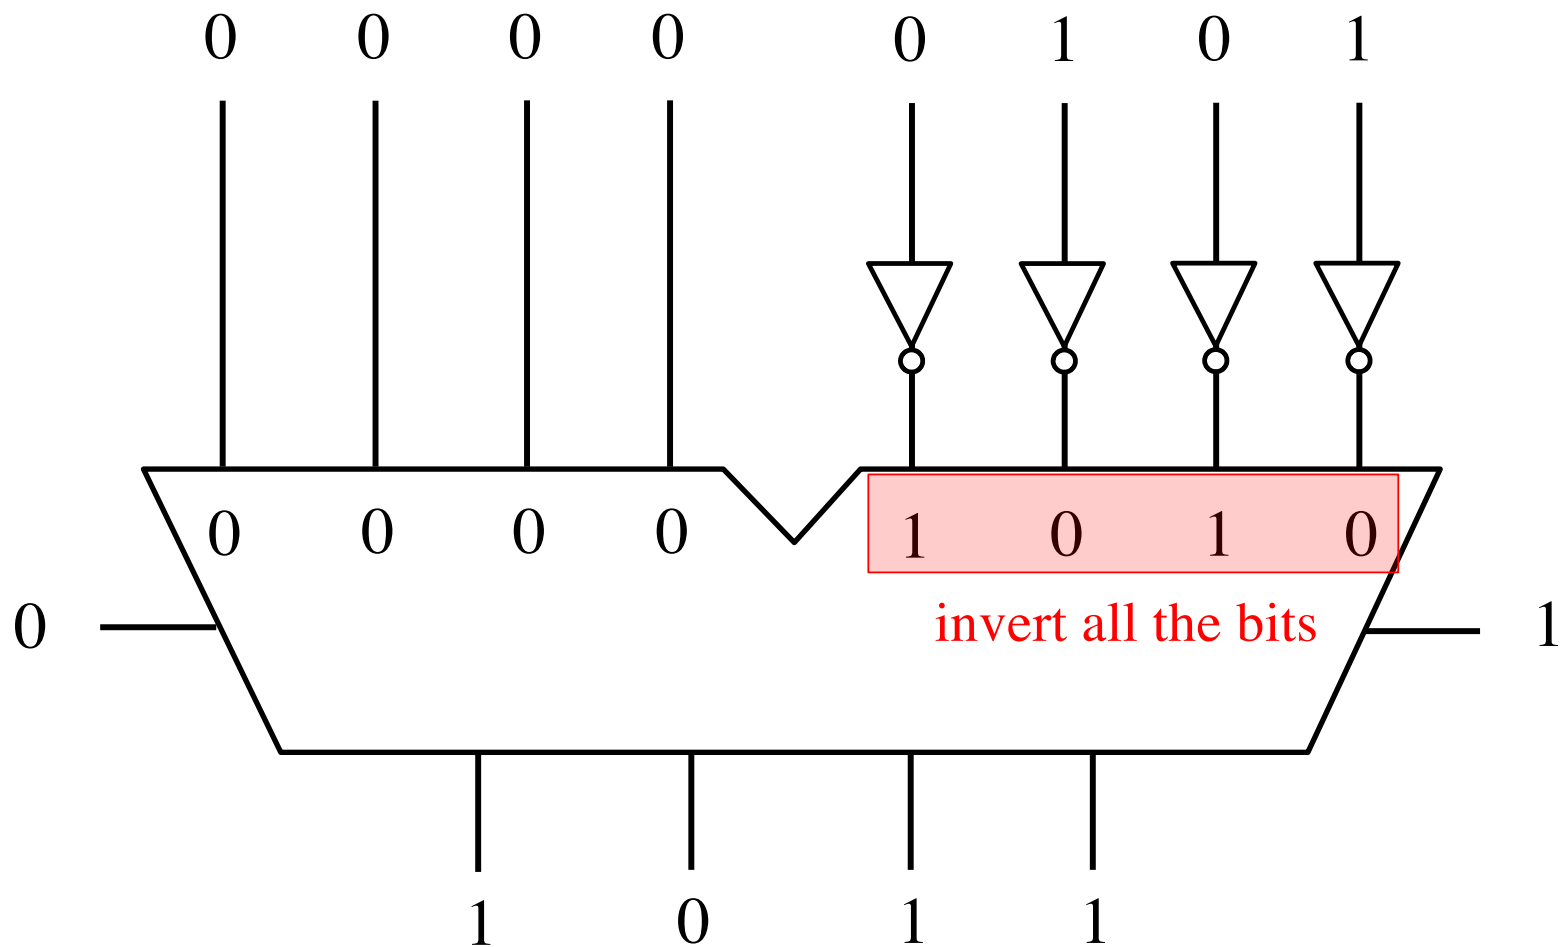

Circuit #2 for negating a number stored in 2's complement representation

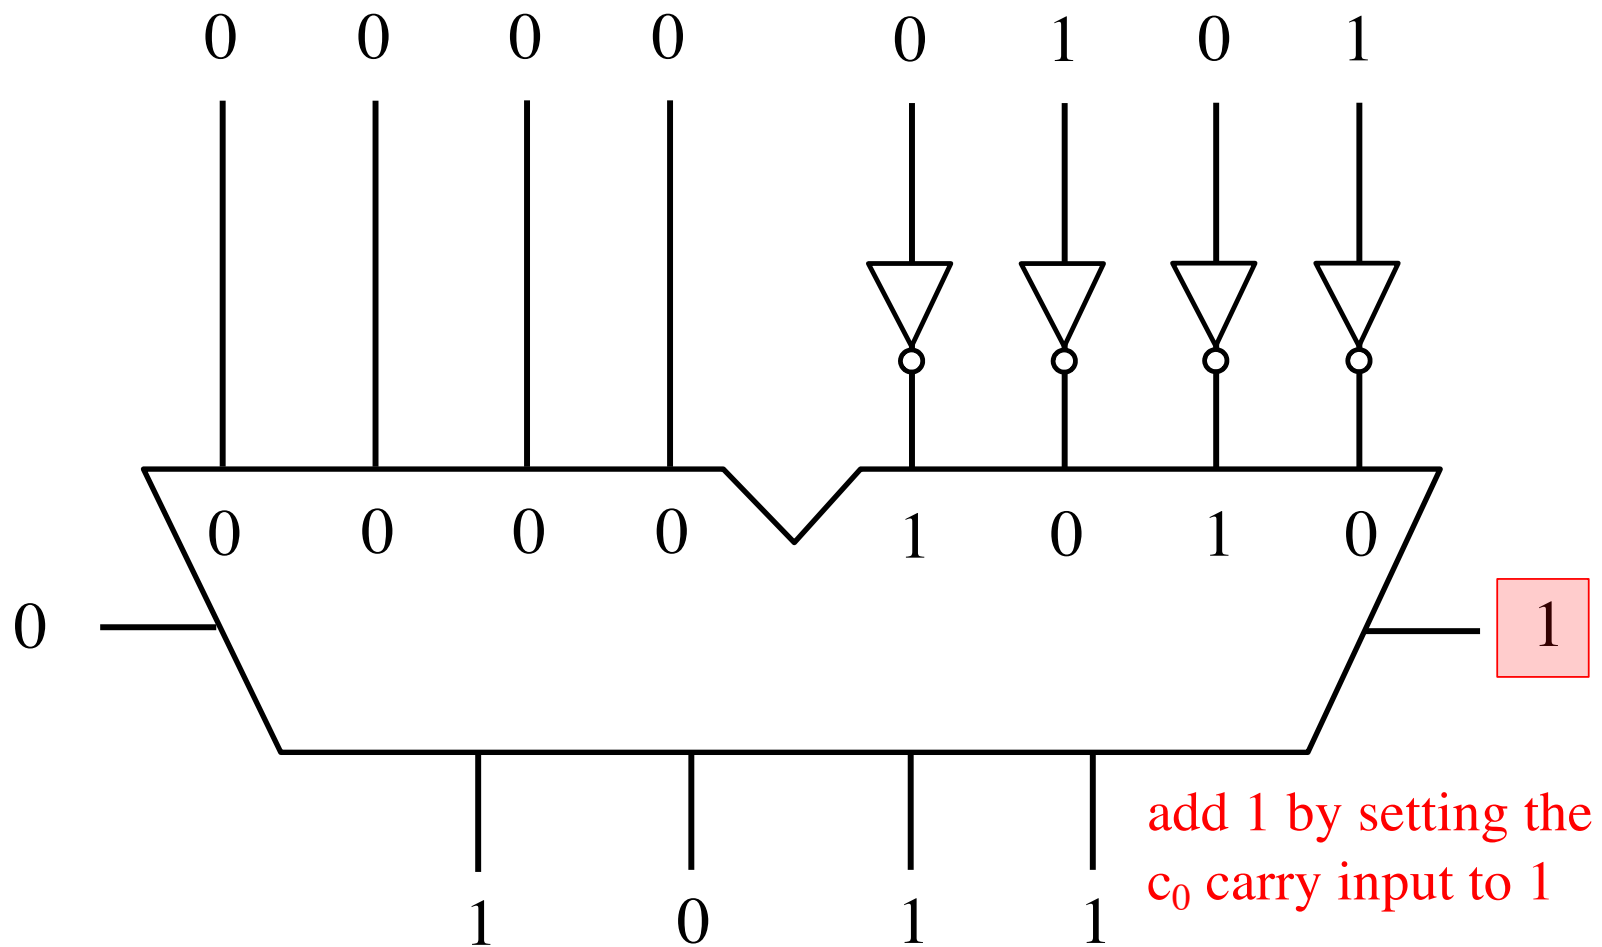


Circuit #2 for negating a number stored in 2's complement representation

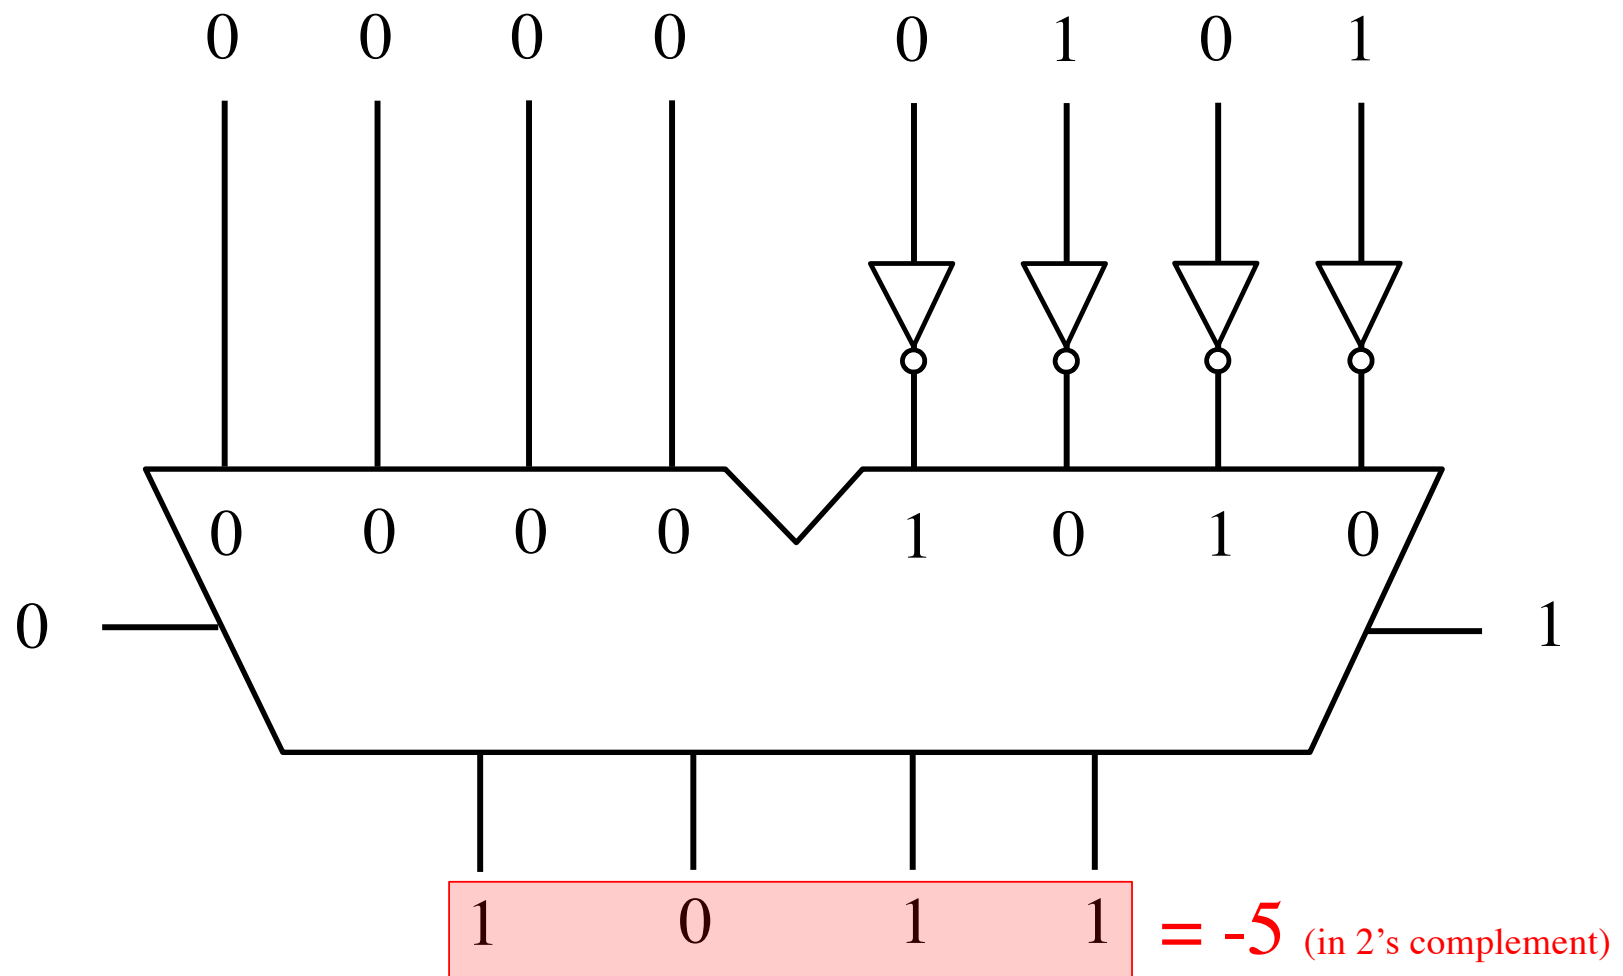


**This also works for negating
a negative number,
thus making it positive**


Circuit #2 for negating a number stored in 2's complement representation

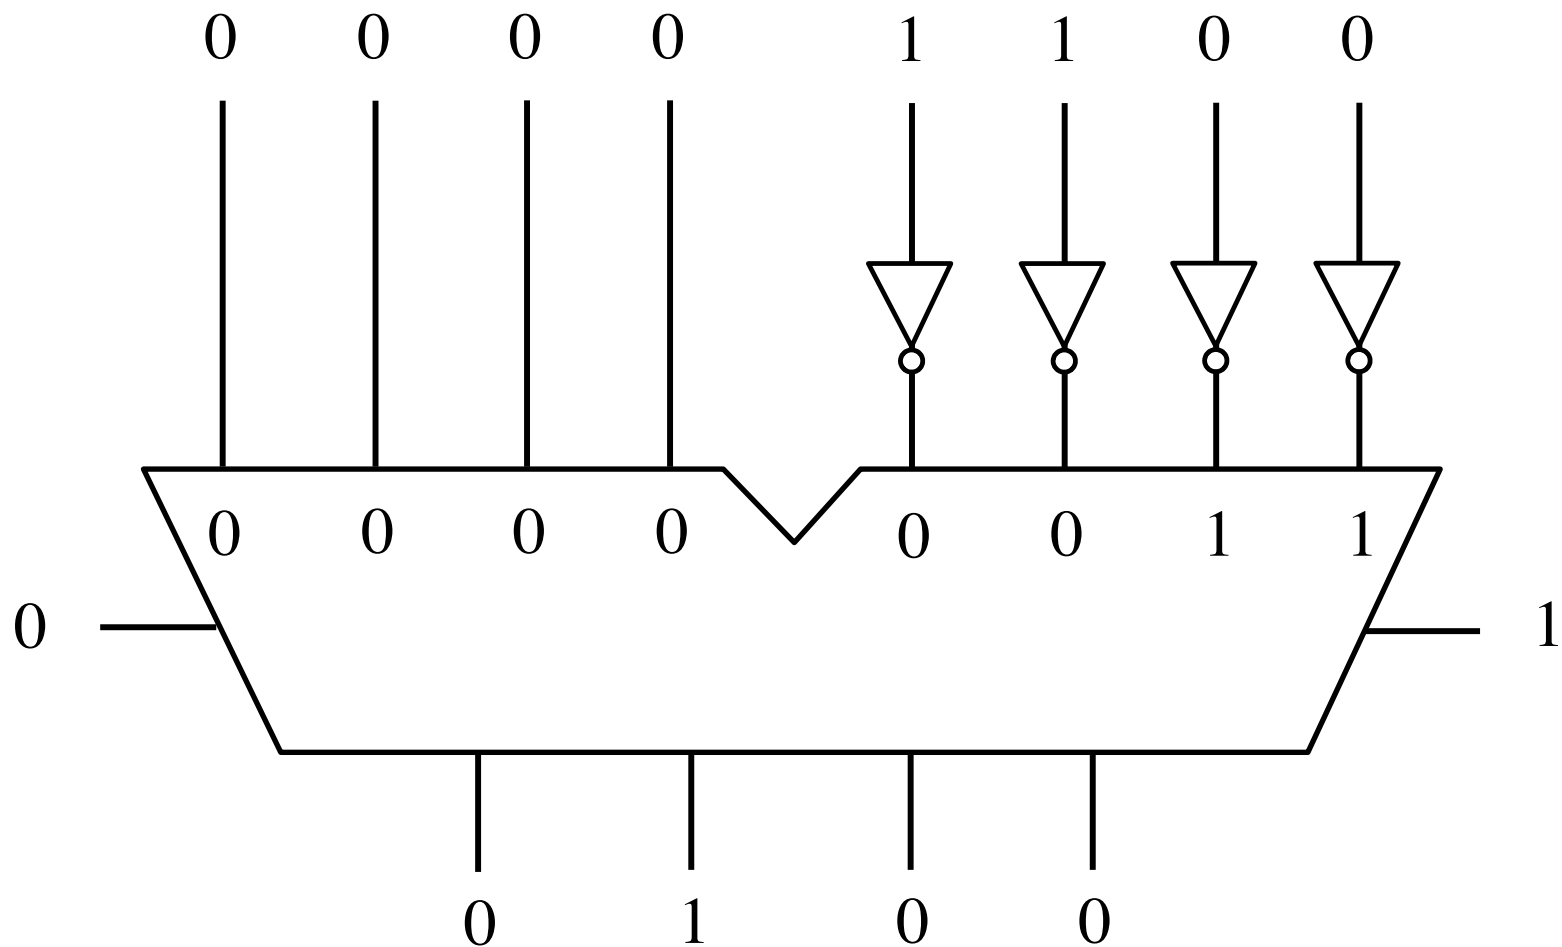


Circuit #2 for negating a number stored in 2's complement representation

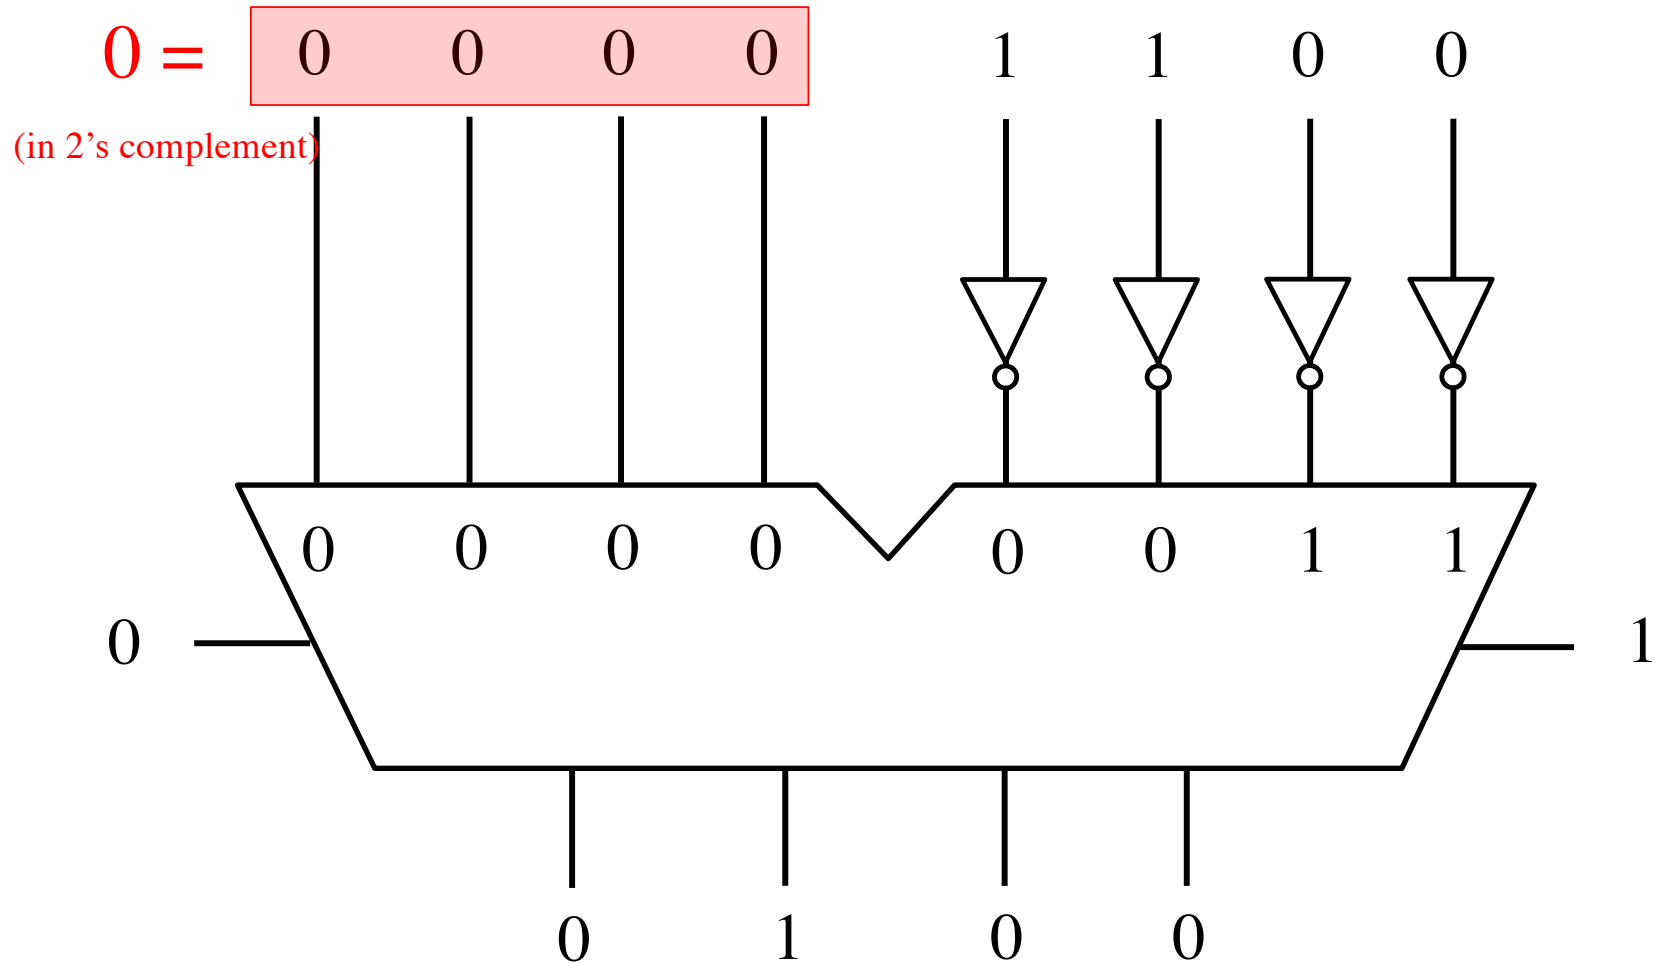


Circuit #2 for negating a number stored in 2's complement representation

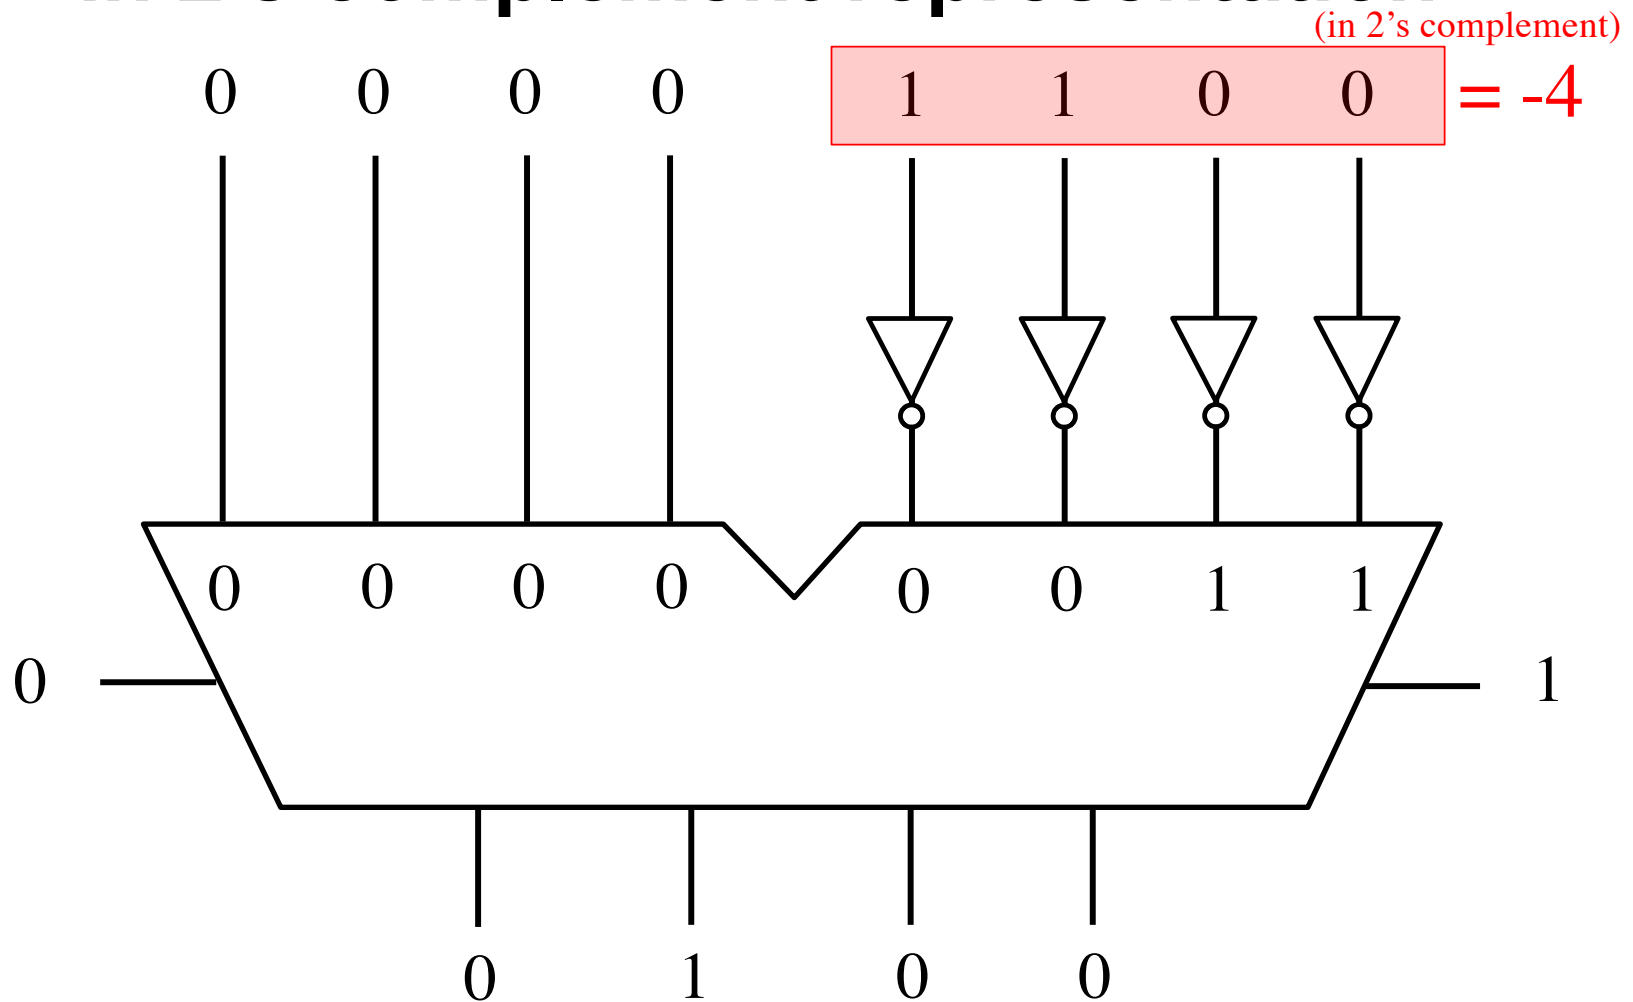


Circuit #2 for negating a number stored in 2's complement representation

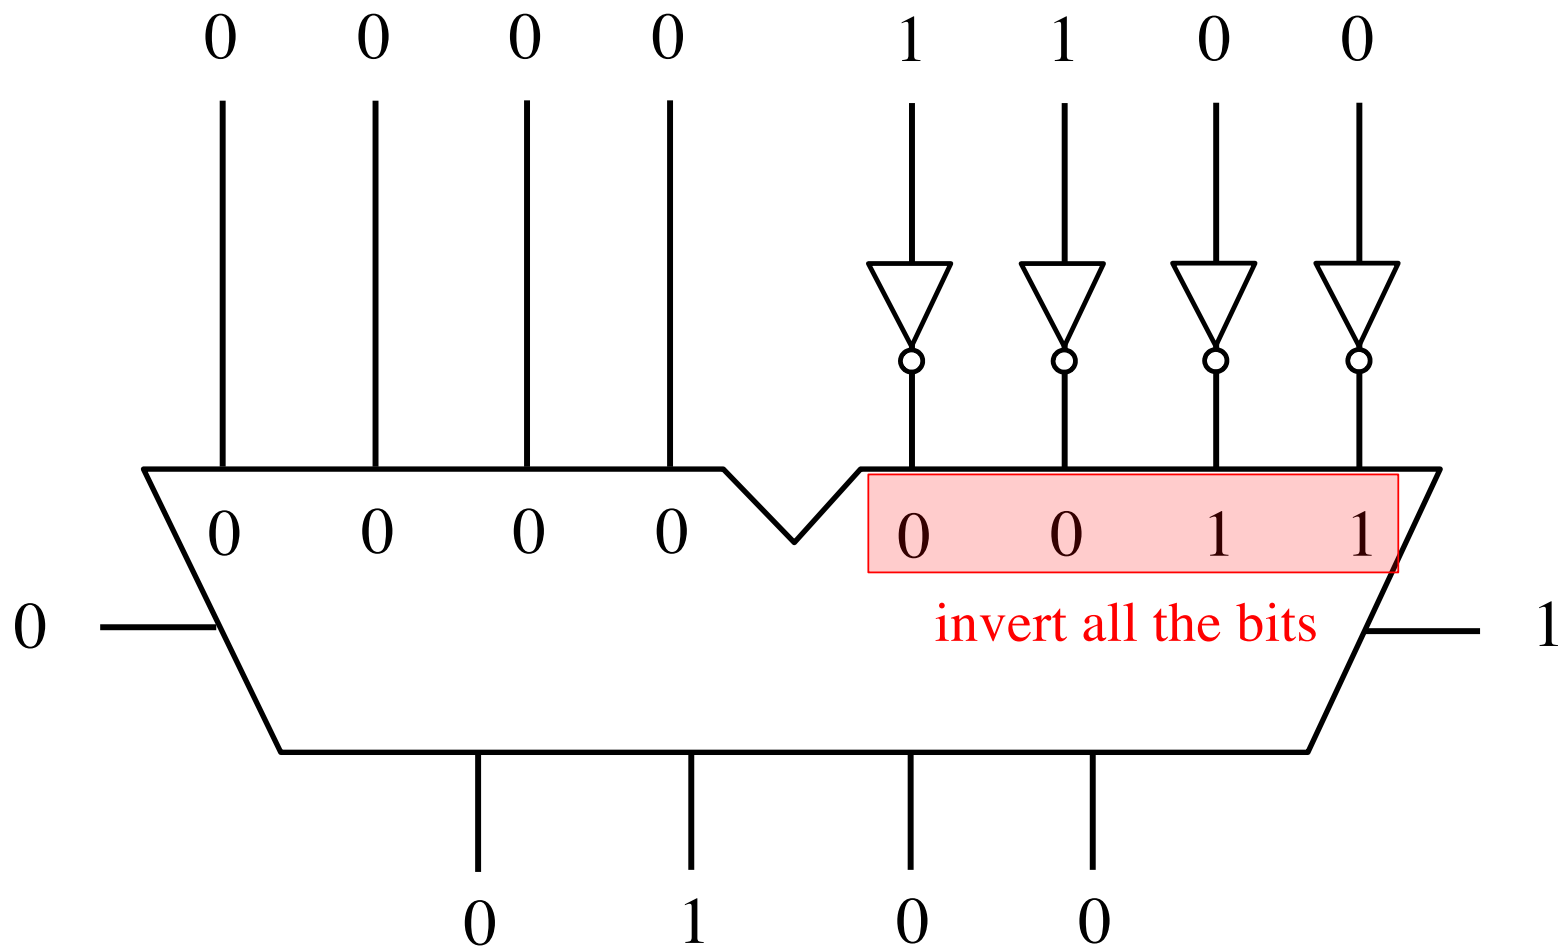

Circuit #2 for negating a number stored in 2's complement representation

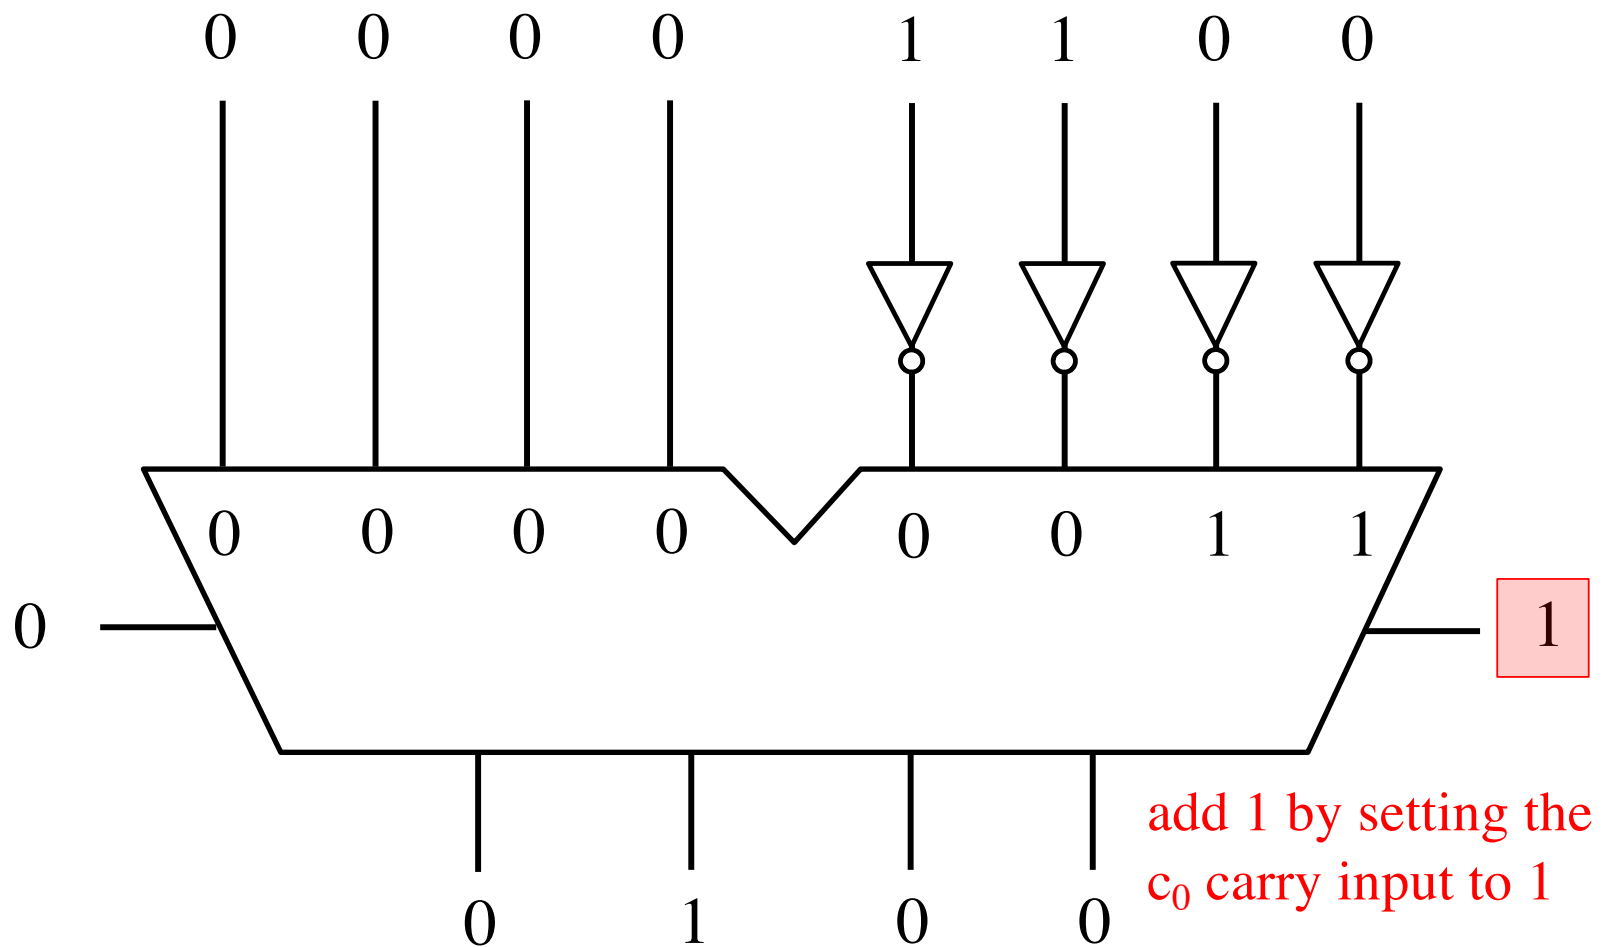

Circuit #2 for negating a number stored in 2's complement representation

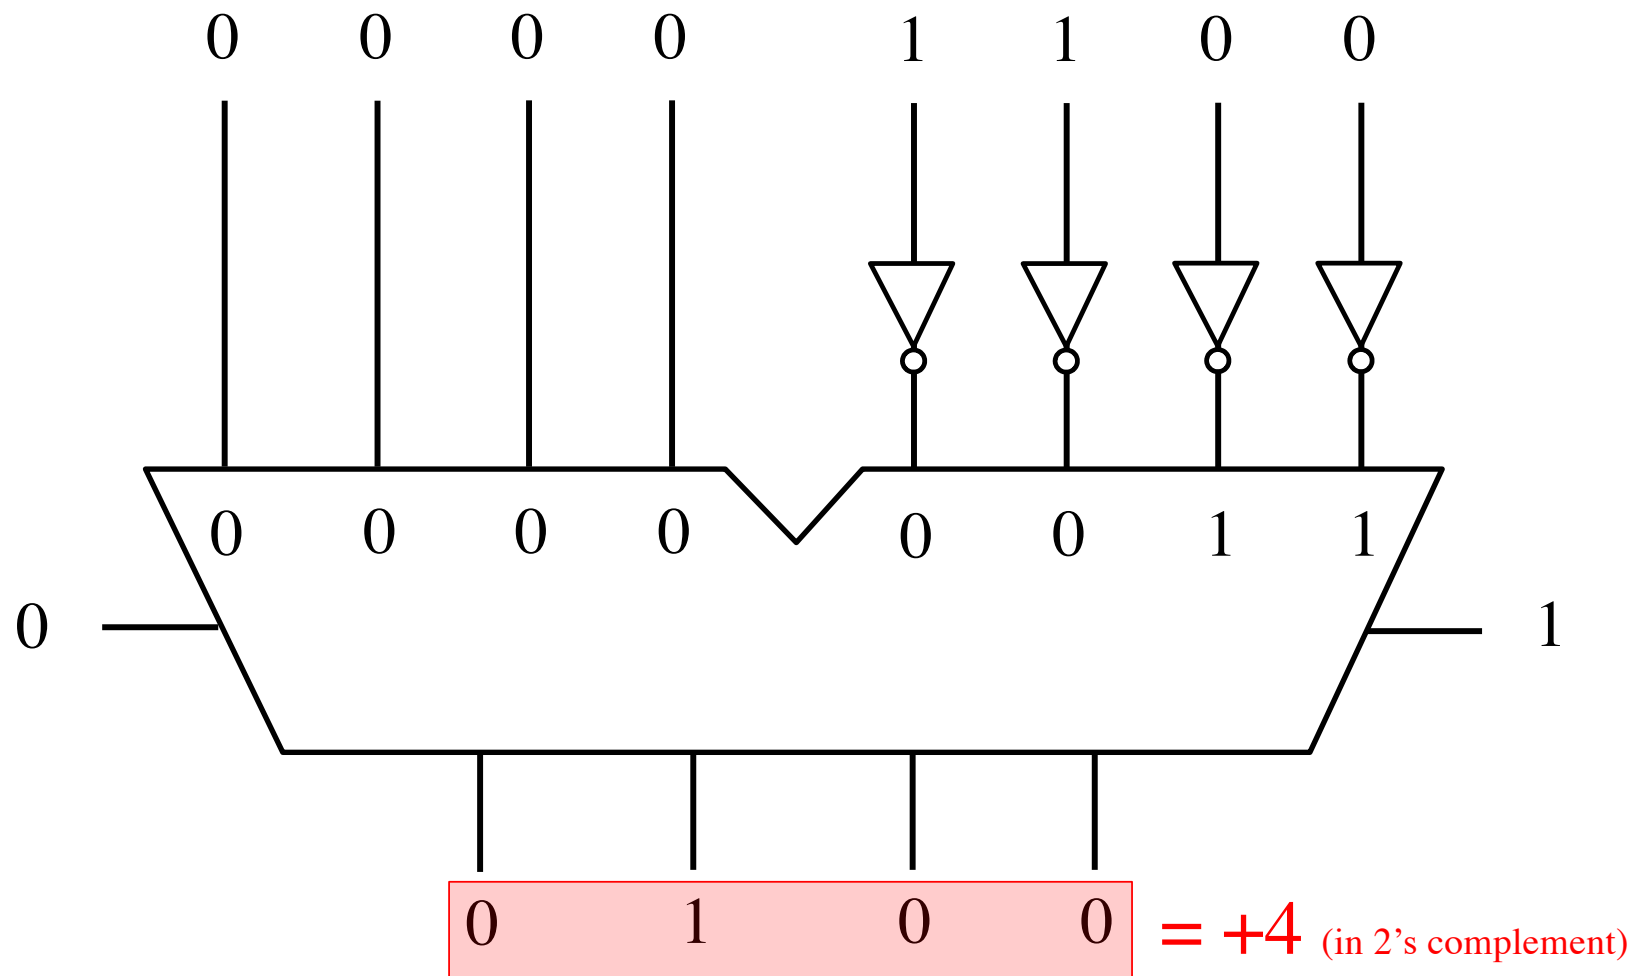

Quick way (**for a human**) to negate a number stored in 2's complement

- Scan the binary number from right to left
- Copy all bits that are 0 from right to left
- Stop at the first 1
- Copy that 1 as well
- Invert all remaining bits

**Negate these numbers stored in
2's complement representation**

0 1 0 1

1 1 1 0

1 1 0 0

0 1 1 1

Negate these numbers stored in 2's complement representation

0 1 0 1

. . . .

1 1 1 0

. . . 0

1 1 0 0

. . 0 0

0 1 1 1

. . . .

Copy all bits that are 0 from right to left.

Negate these numbers stored in 2's complement representation

0 1 0 1
. . . 1

1 1 1 0
. . 1 0

1 1 0 0
. 1 0 0

0 1 1 1
. . . 1

Stop at the first 1. Copy that 1 as well.

Negate these numbers stored in 2's complement representation

0 1 0 1

1 0 1 1

1 1 1 0

0 0 1 0

1 1 0 0

0 1 0 0

0 1 1 1

1 0 0 1

Invert all remaining bits.

Negate these numbers stored in 2's complement representation

$$0\ 1\ 0\ 1 = +5$$

$$1\ 0\ 1\ 1 = -5$$

$$1\ 1\ 1\ 0 = -2$$

$$0\ 0\ 1\ 0 = +2$$


$$1\ 1\ 0\ 0 = -4$$

$$0\ 1\ 0\ 0 = +4$$

$$0\ 1\ 1\ 1 = +7$$


$$1\ 0\ 0\ 1 = -7$$

The number circle for 2's complement

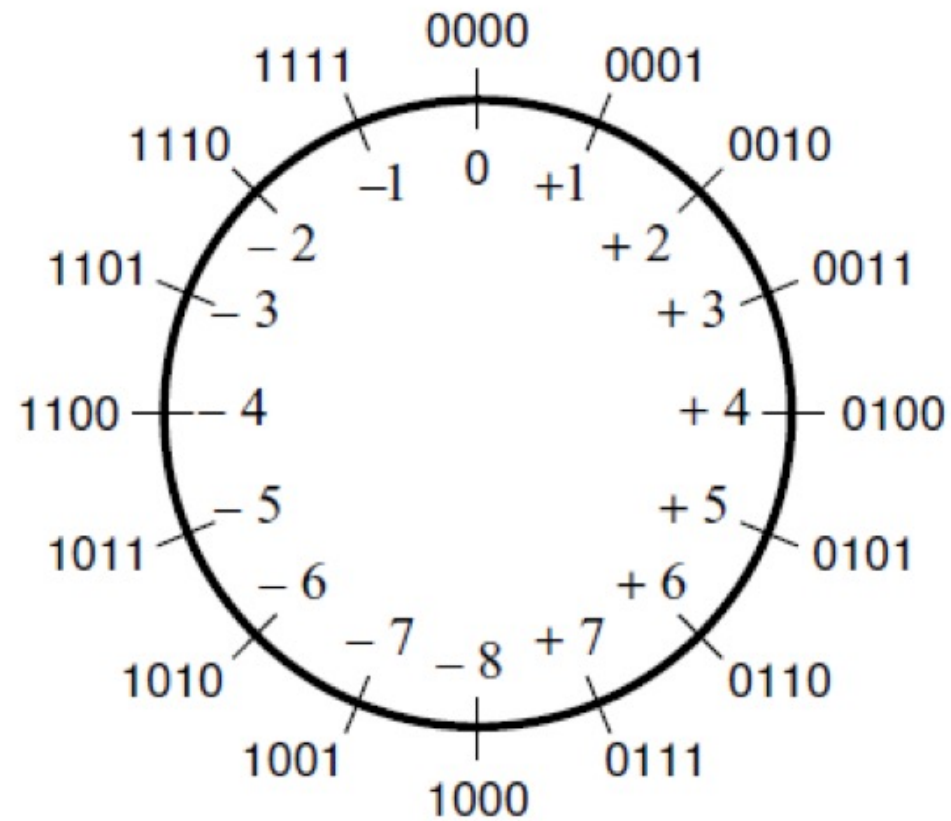


[Figure 3.11a from the textbook]


The number circle for 2's complement

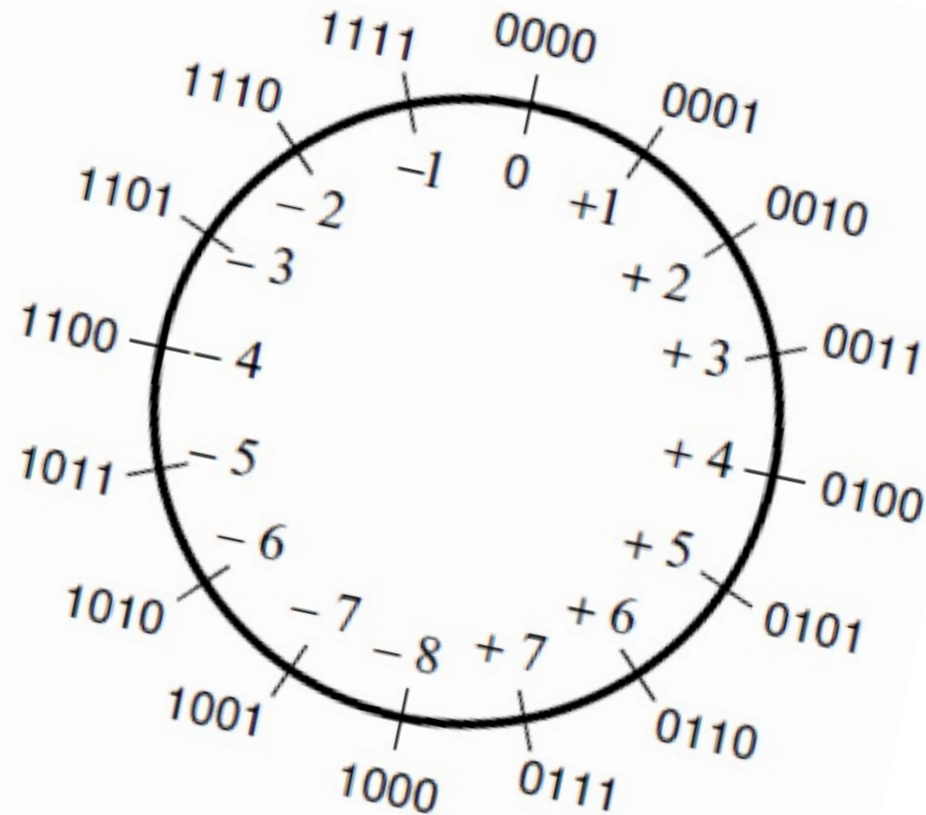


The number circle for 2's complement

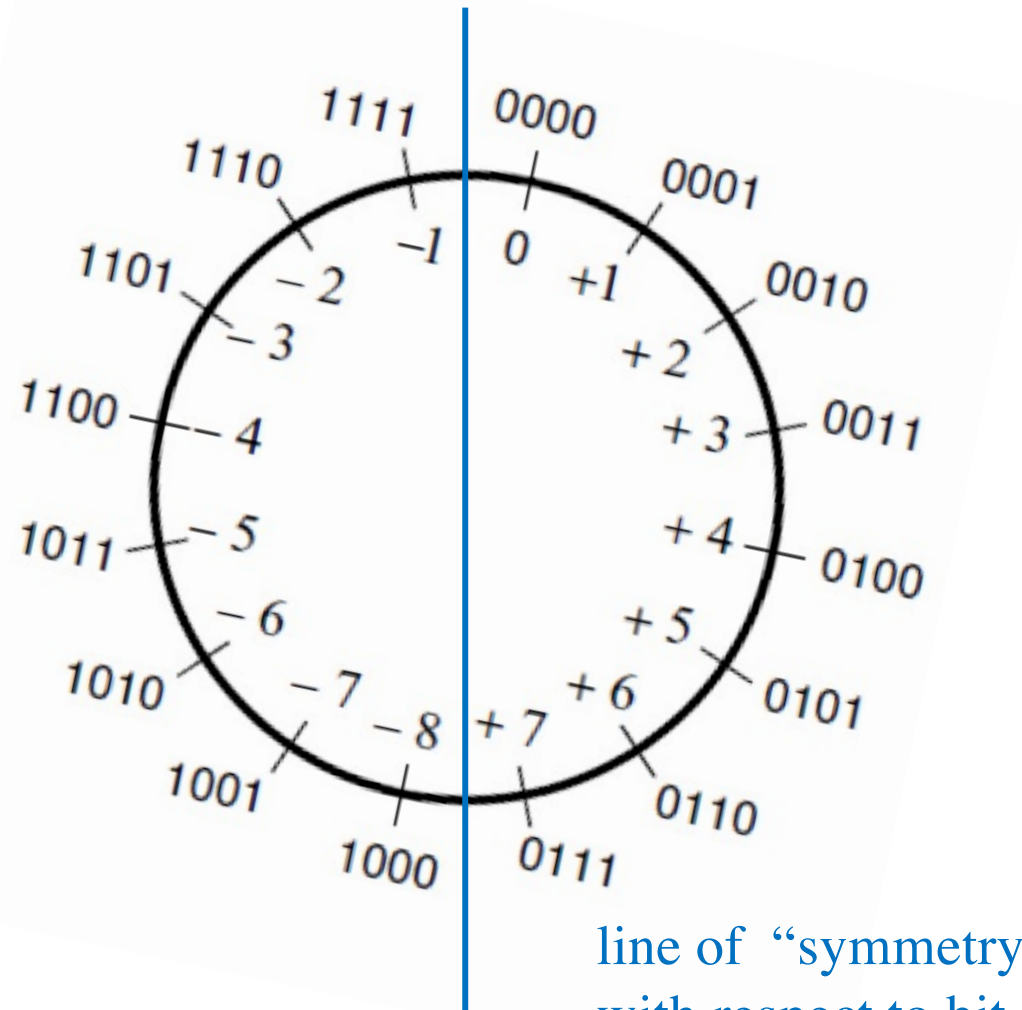


The number circle for 2's complement

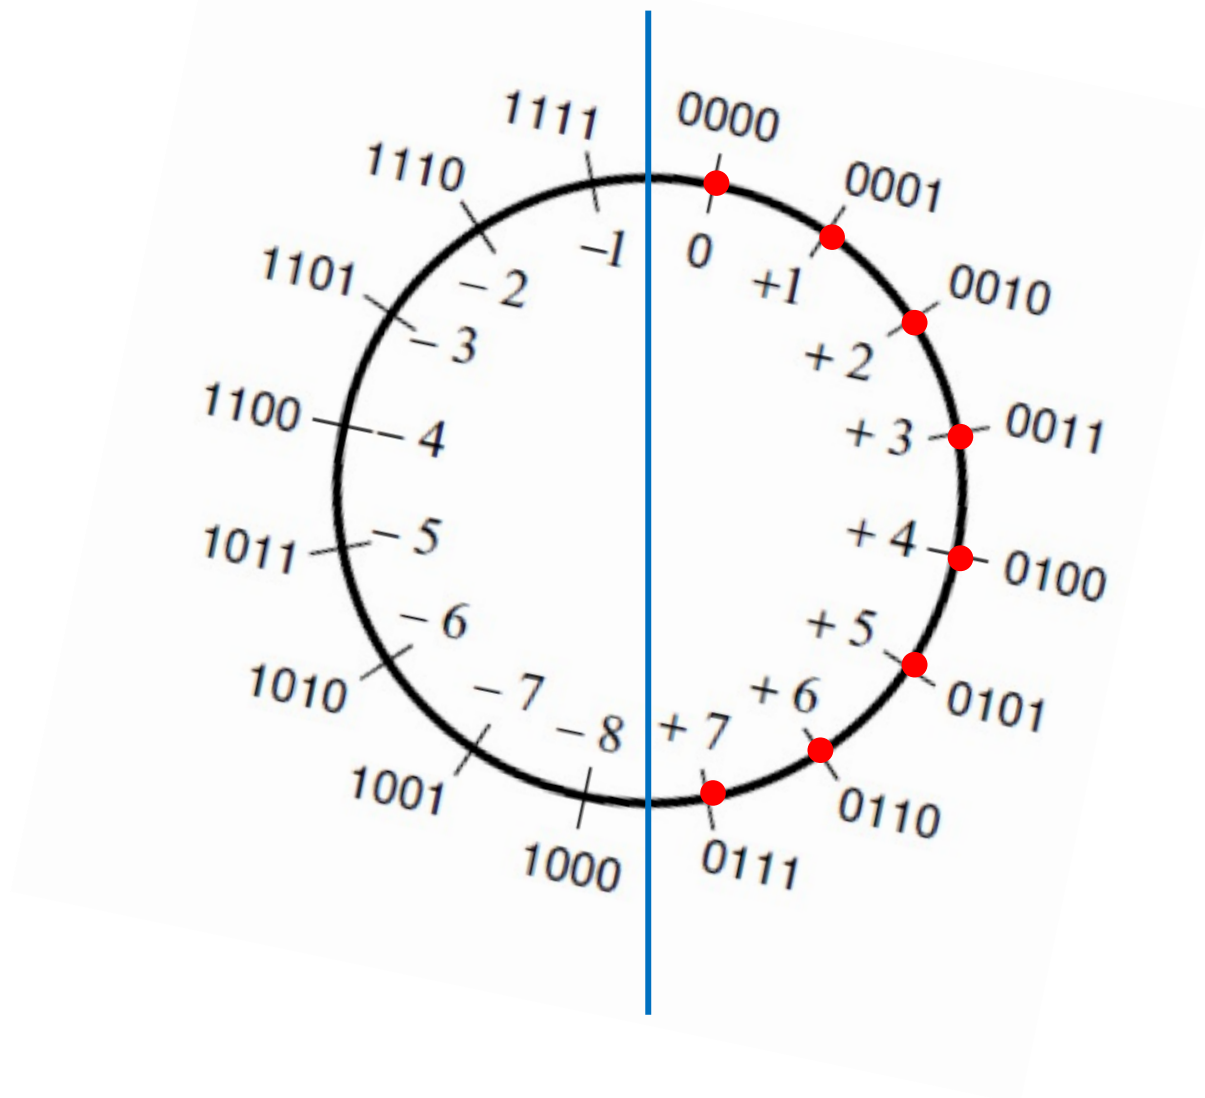


The number circle for 2's complement

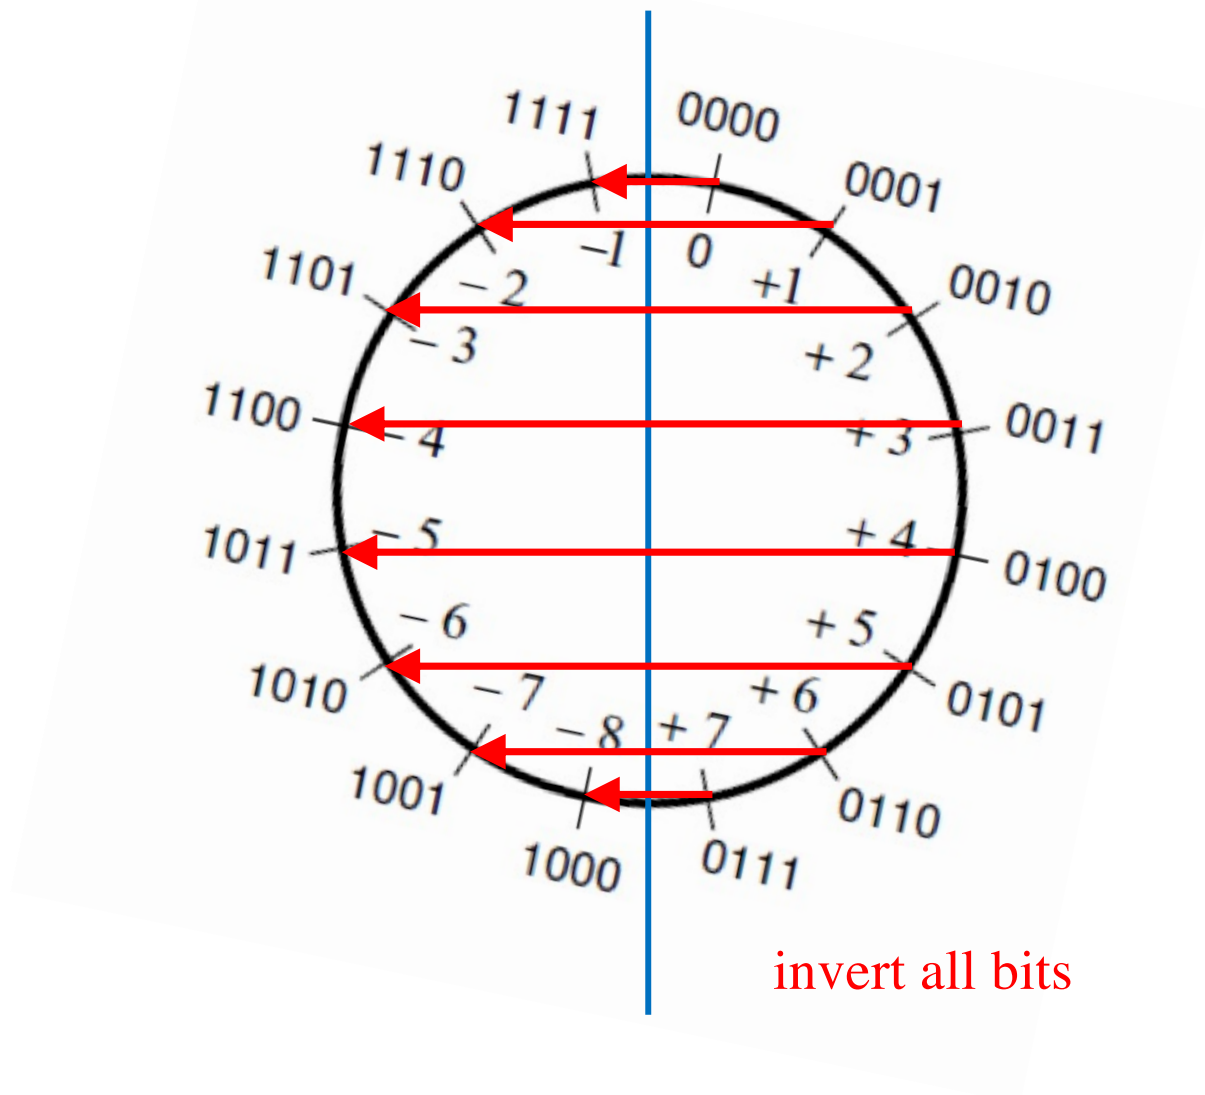


The number circle for 2's complement

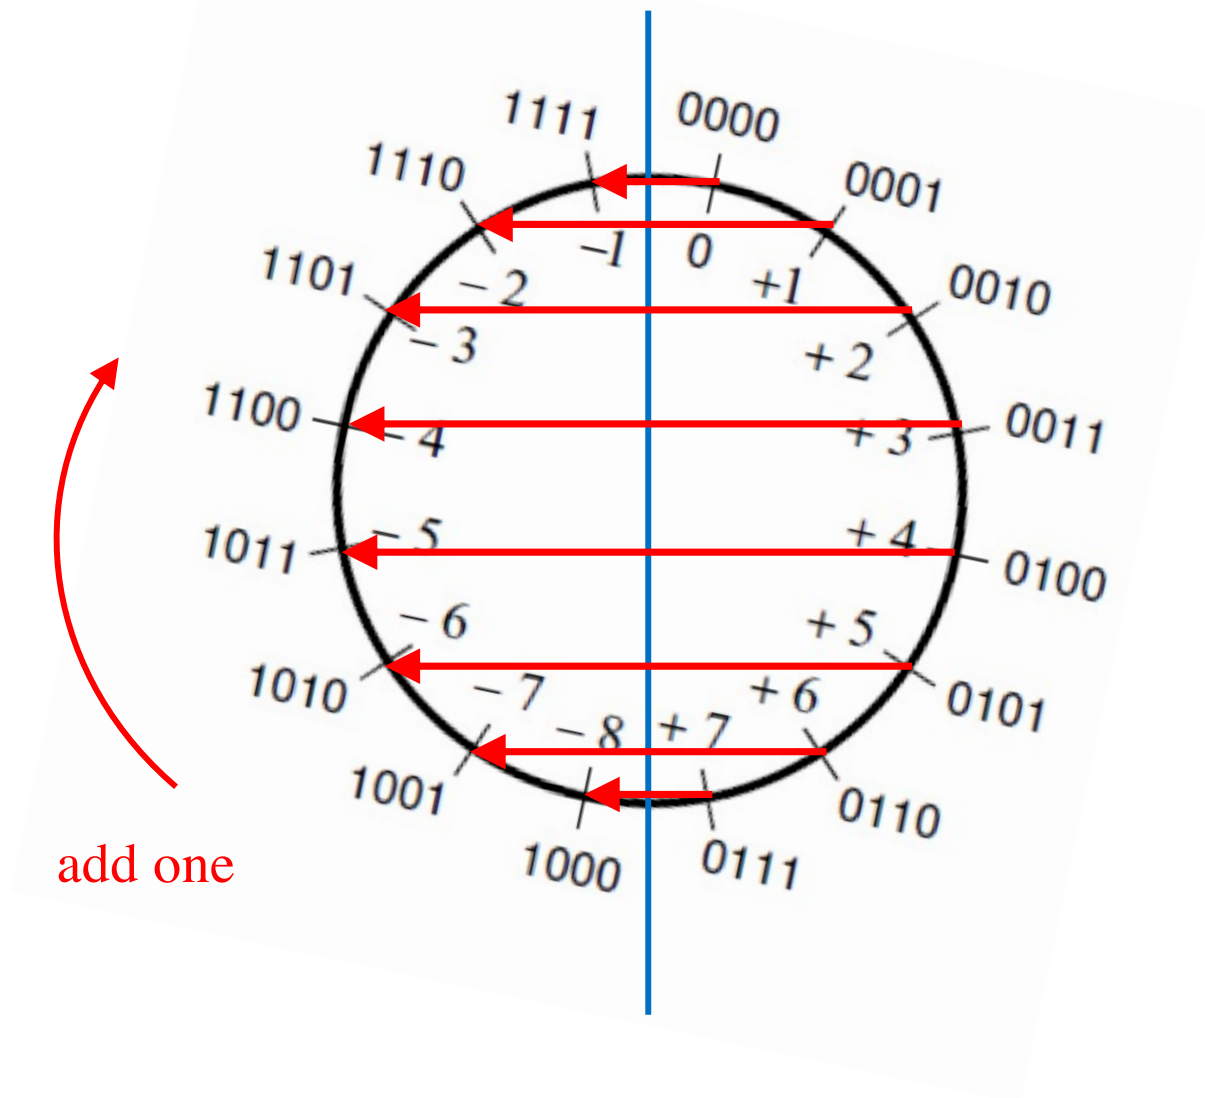


The number circle for 2's complement

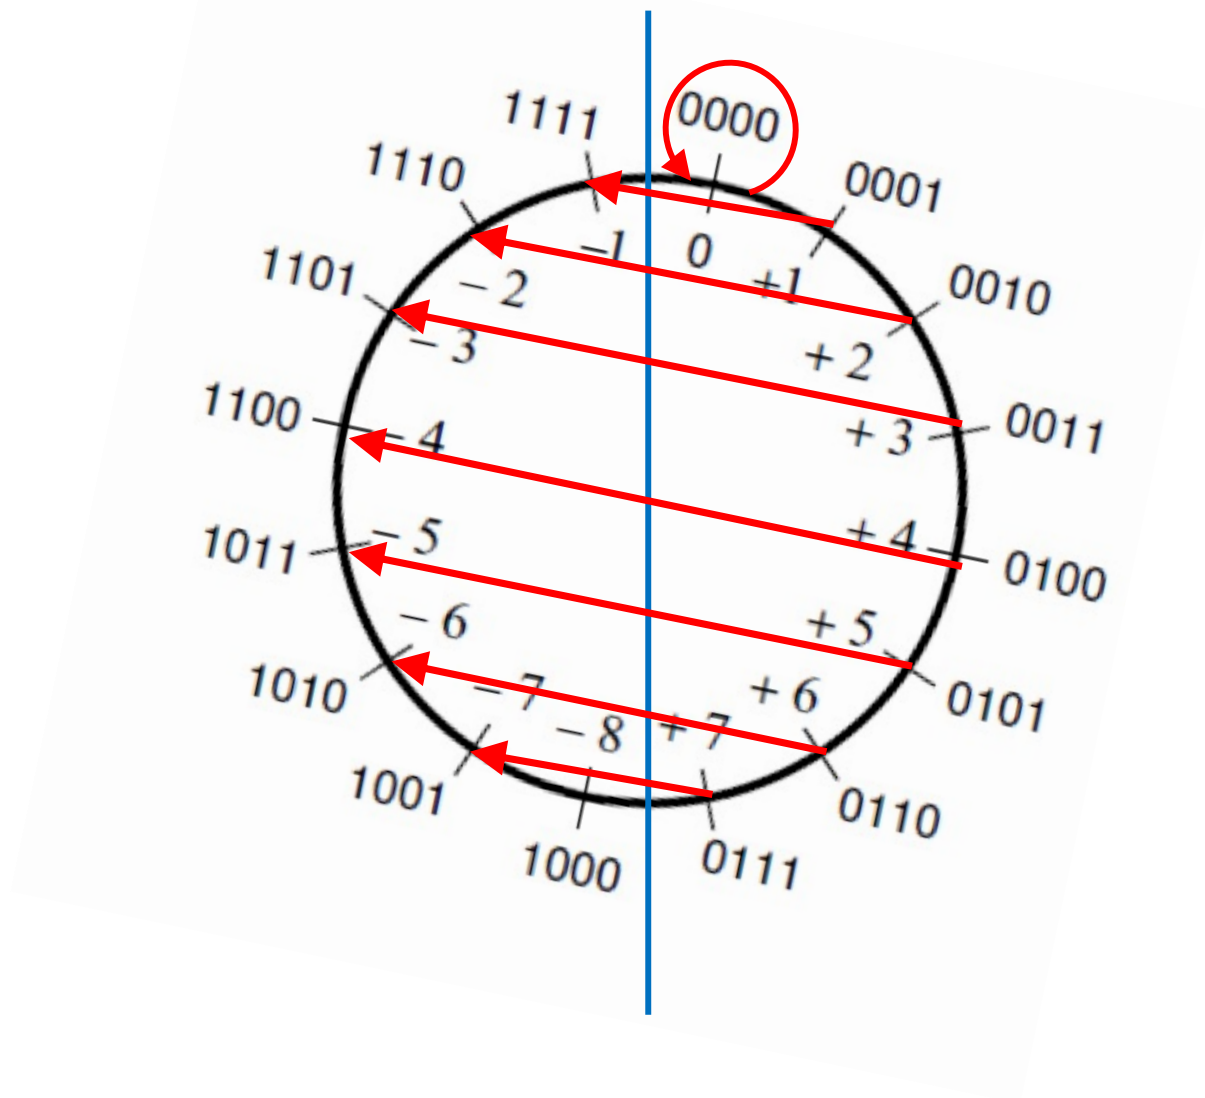


Circuit #2 for negating a number stored in 2's complement representation

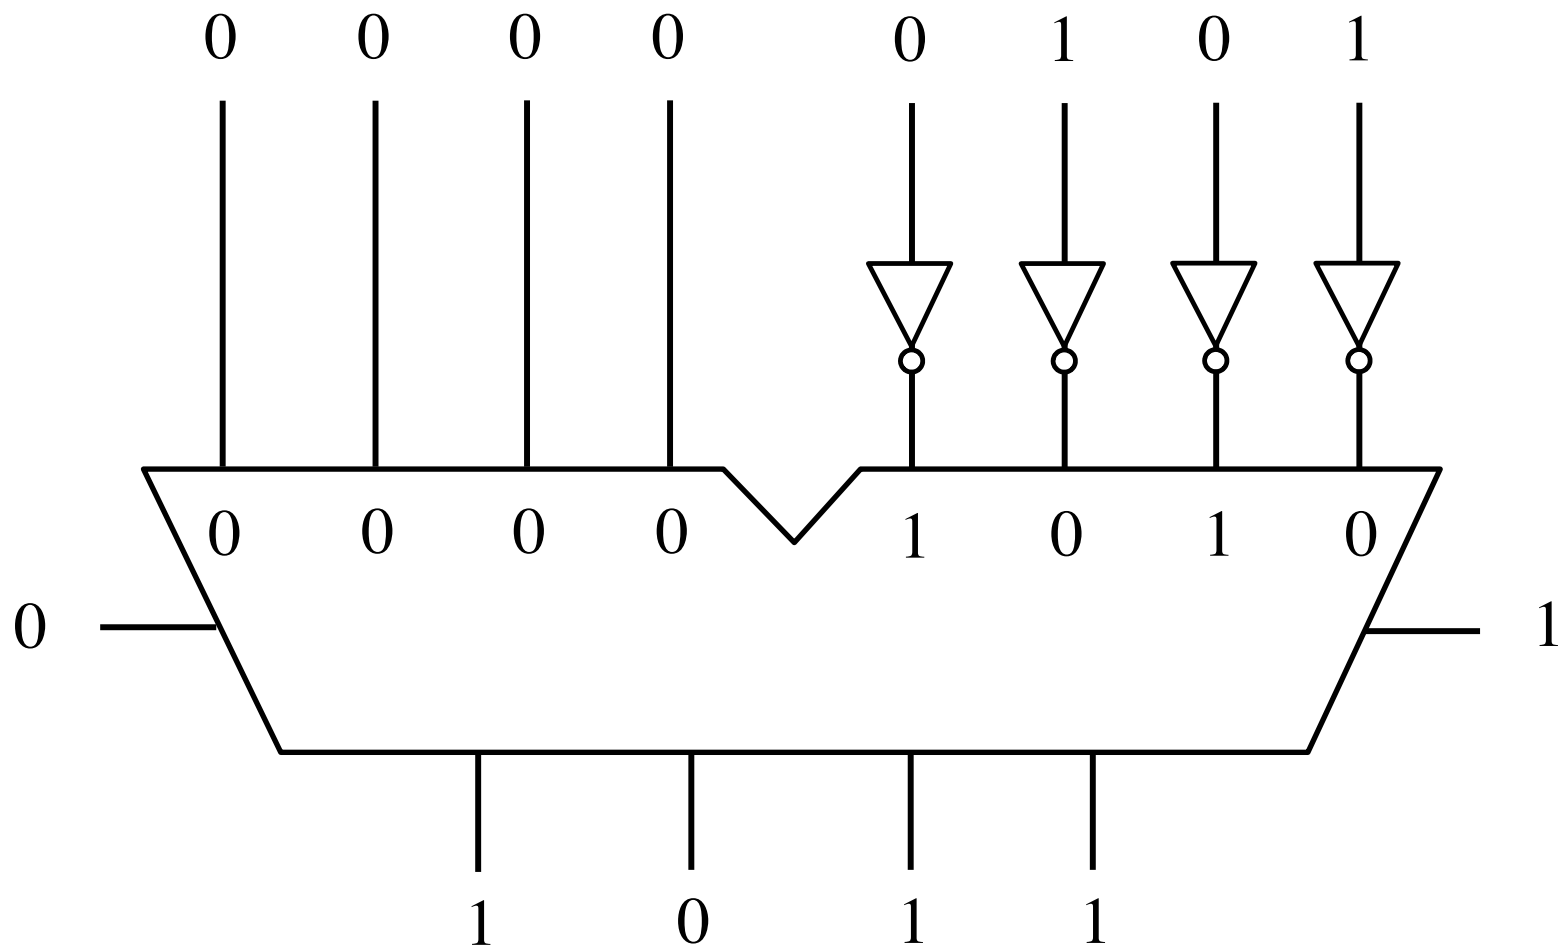


Circuit #2 for negating a number stored in 2's complement representation

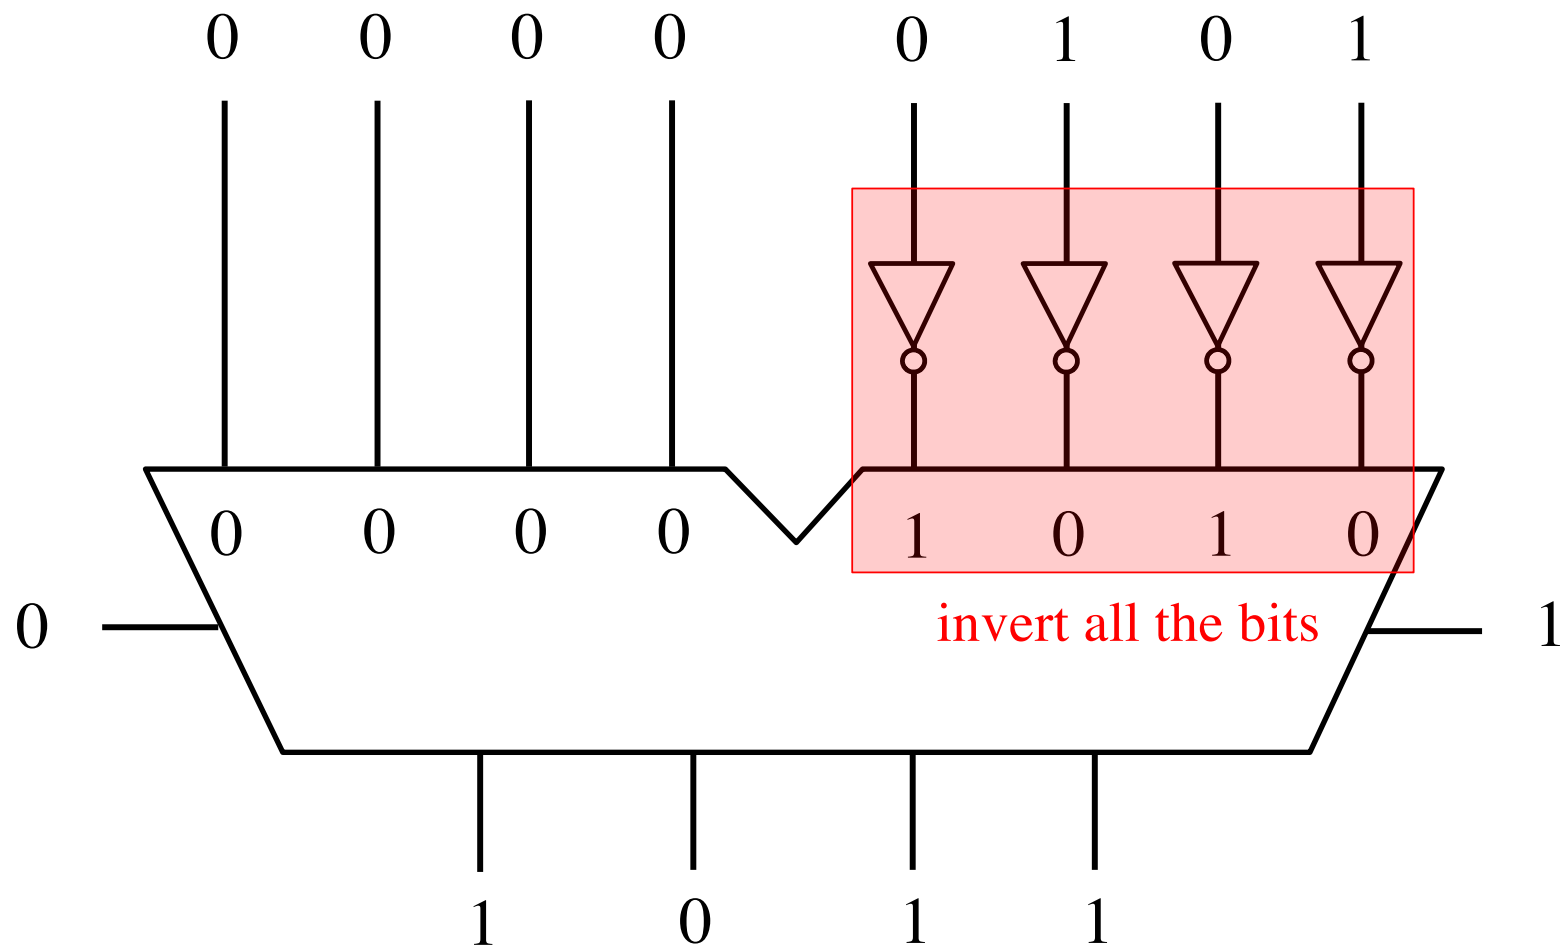


Circuit #2 for negating a number stored in 2's complement representation

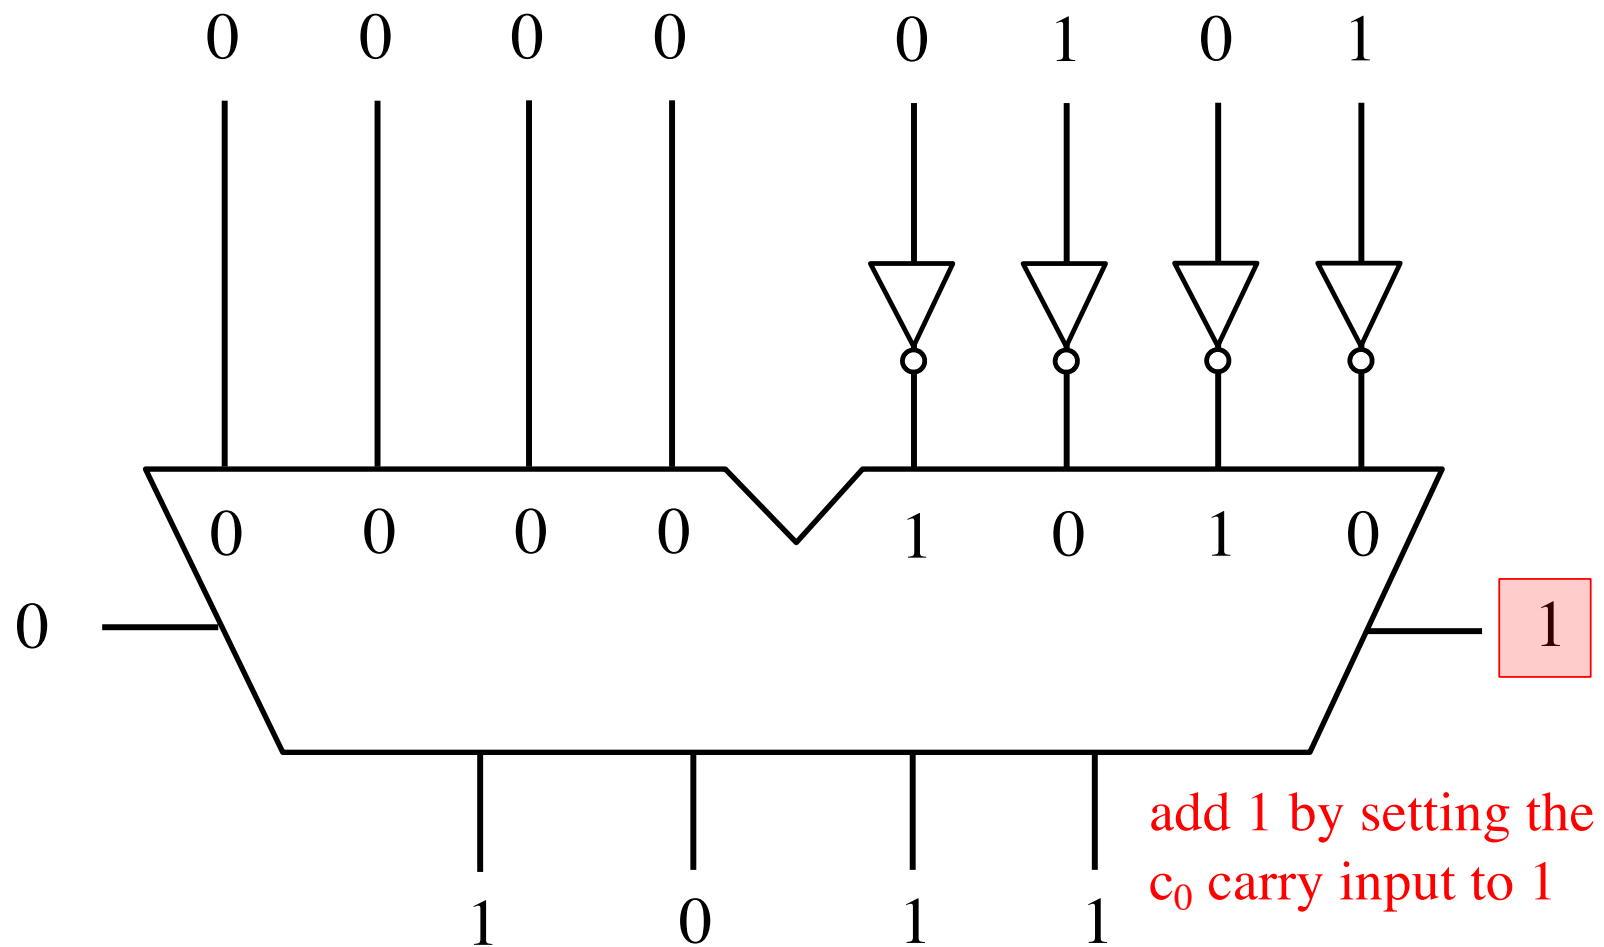


The number circle for 2's complement

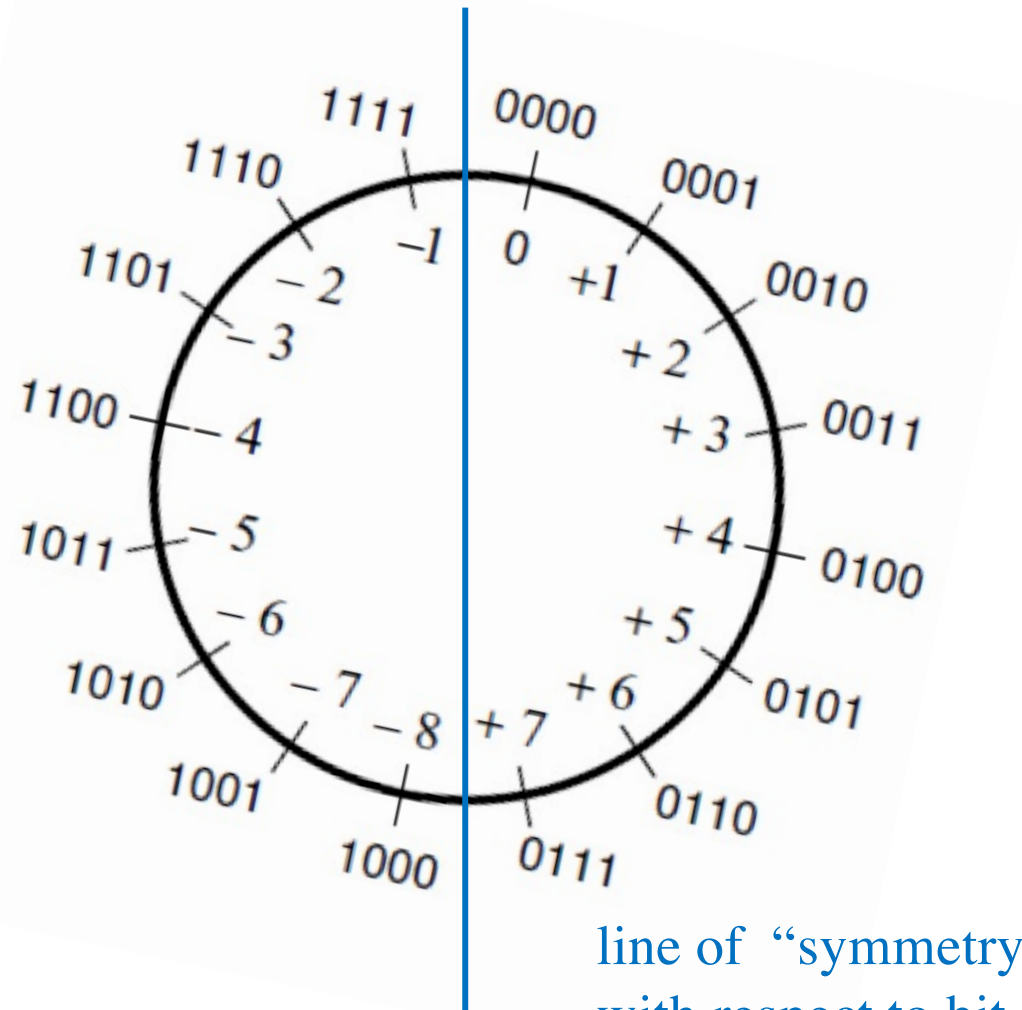


The number circle for 2's complement

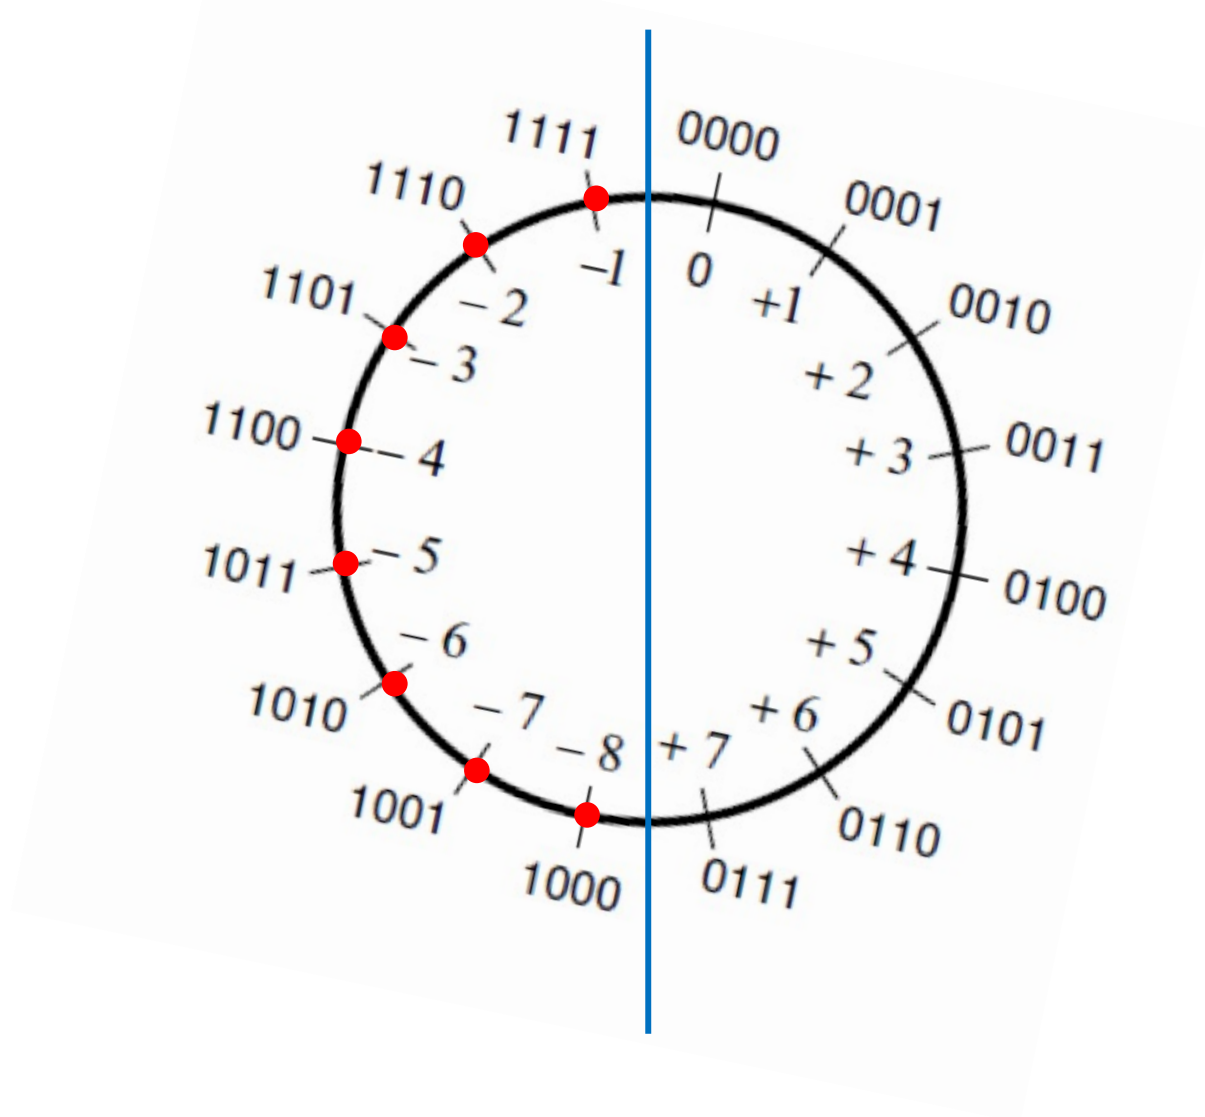


The number circle for 2's complement

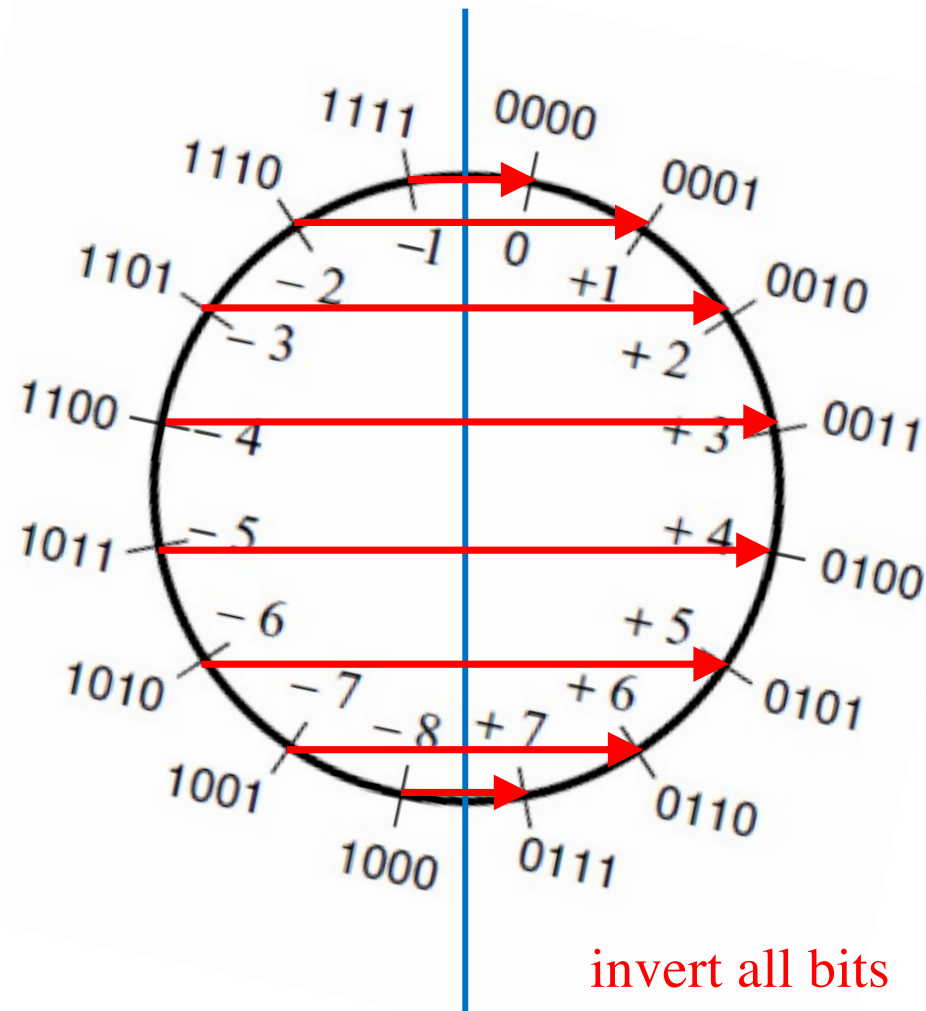


The number circle for 2's complement

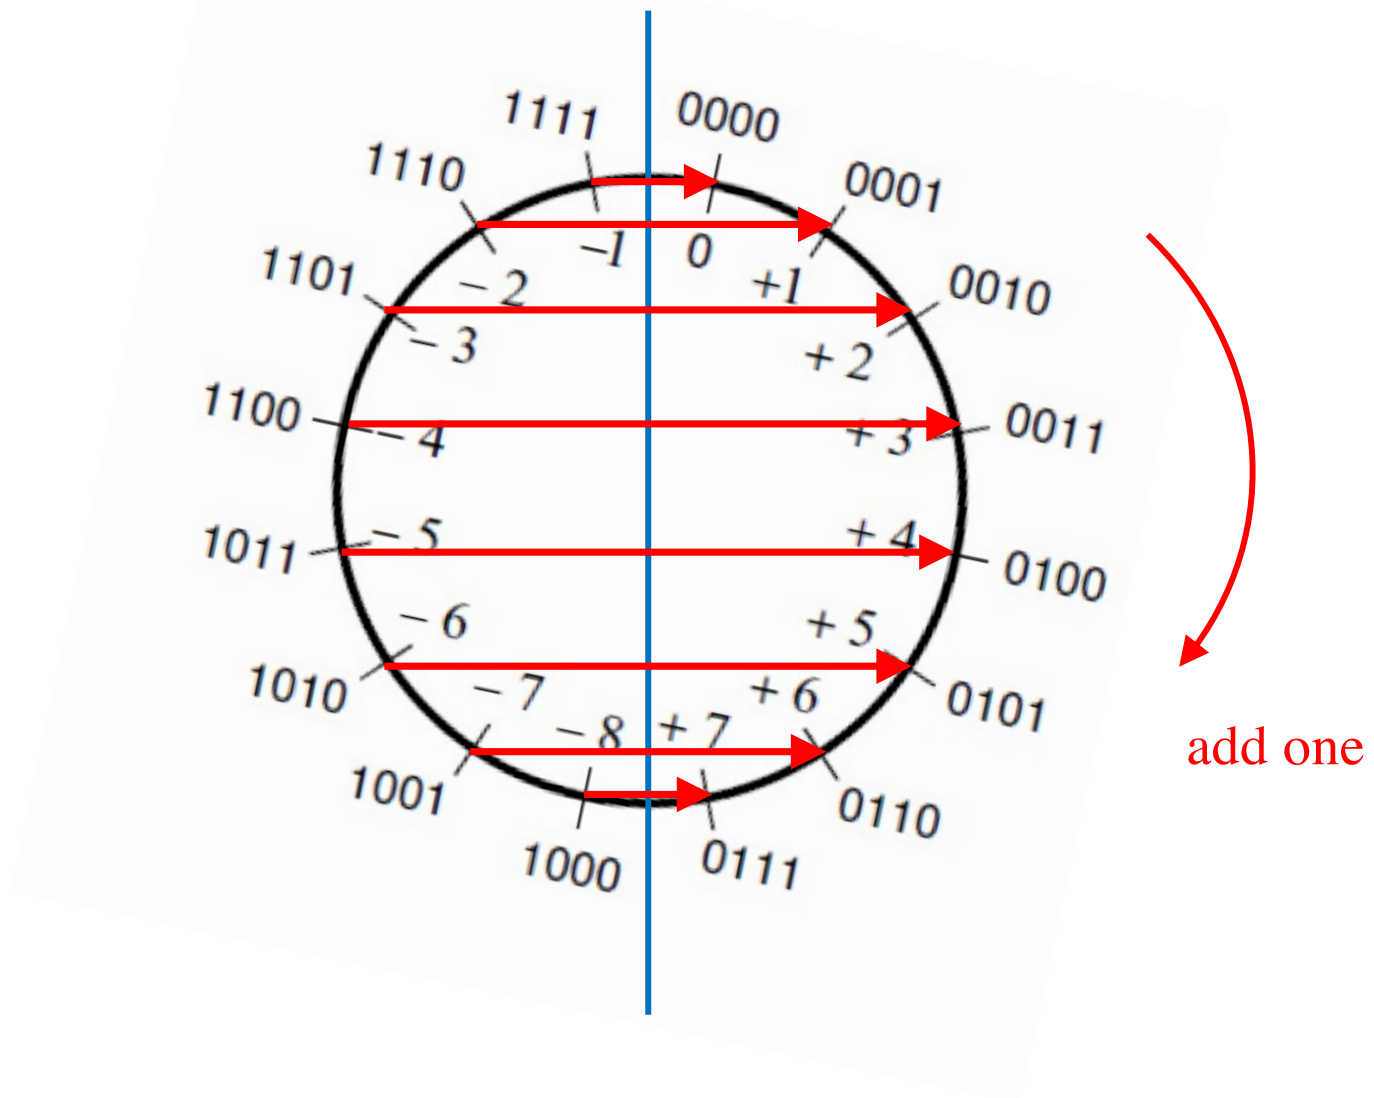


The number circle for 2's complement

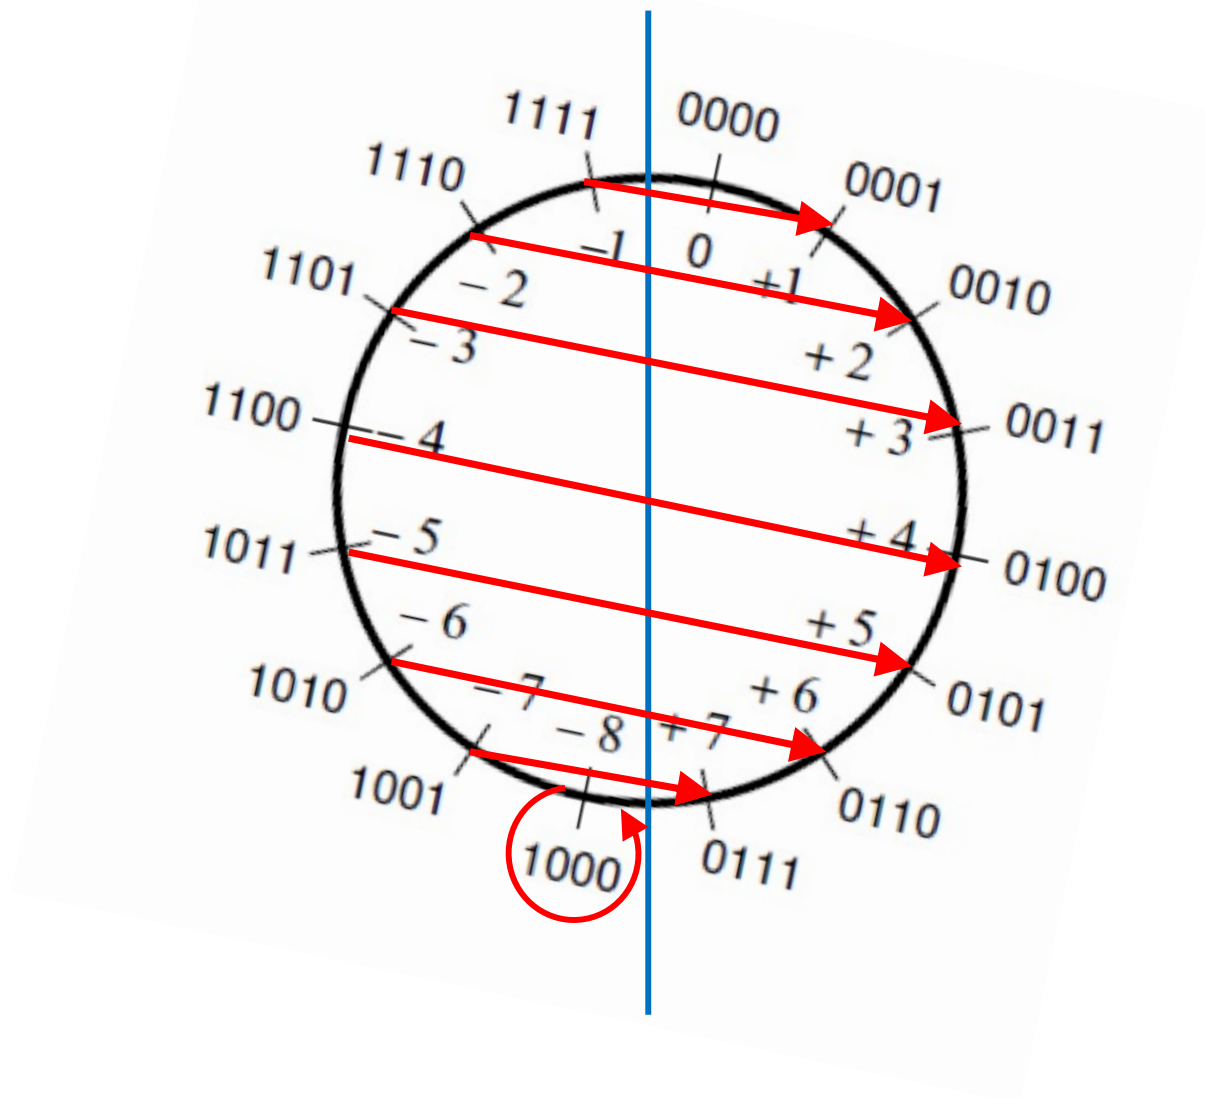

Circuit #2 for negating a number stored in 2's complement representation

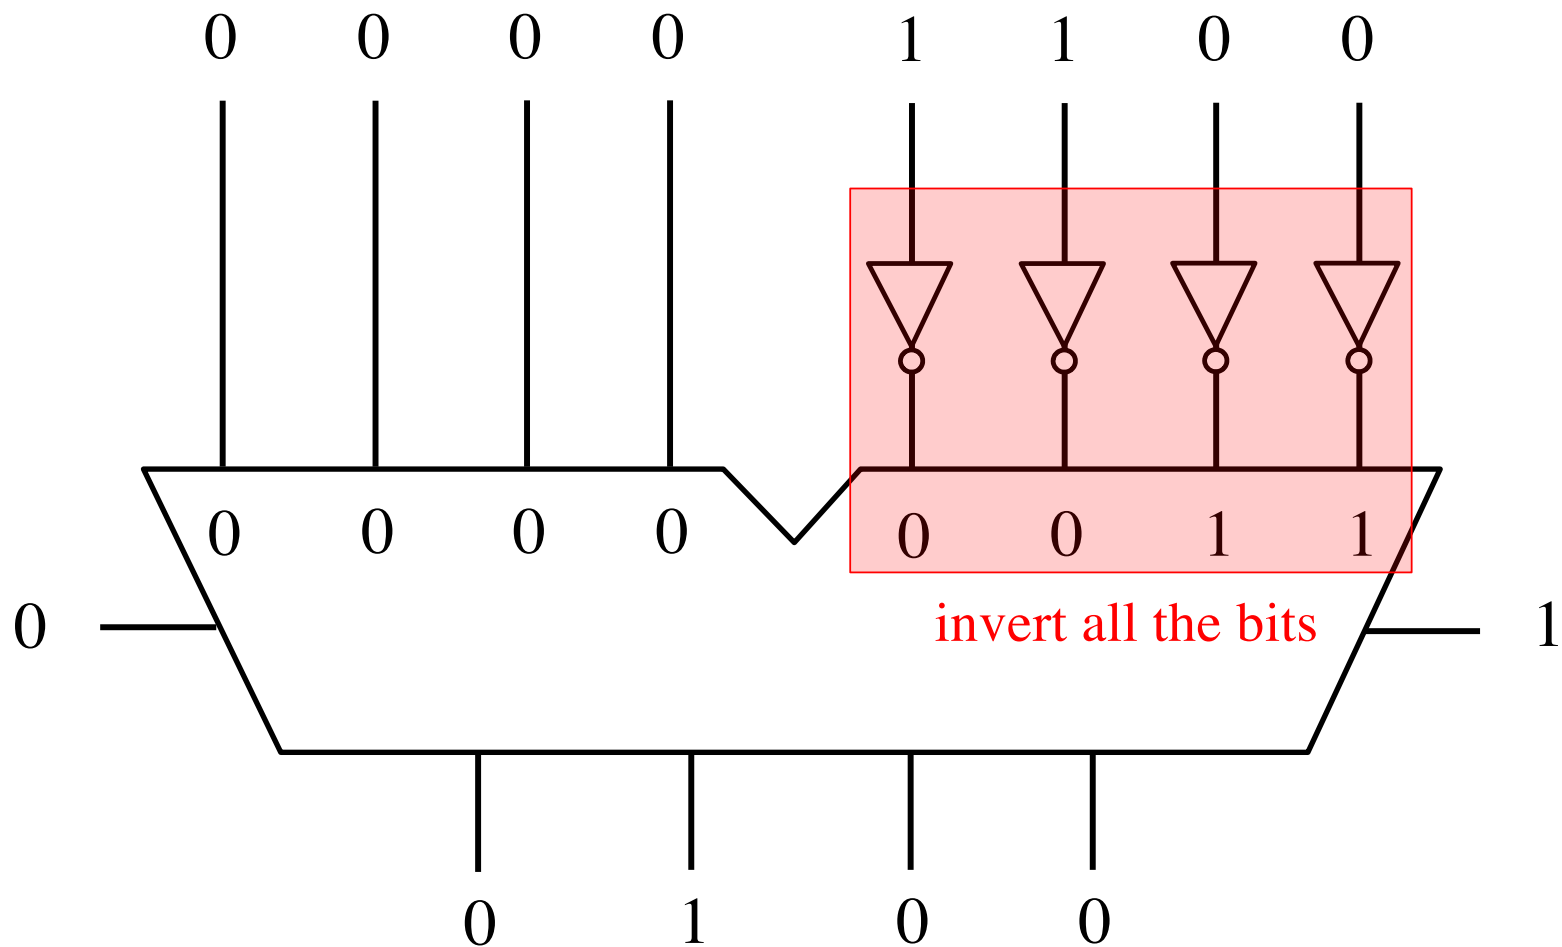

Circuit #2 for negating a number stored in 2's complement representation

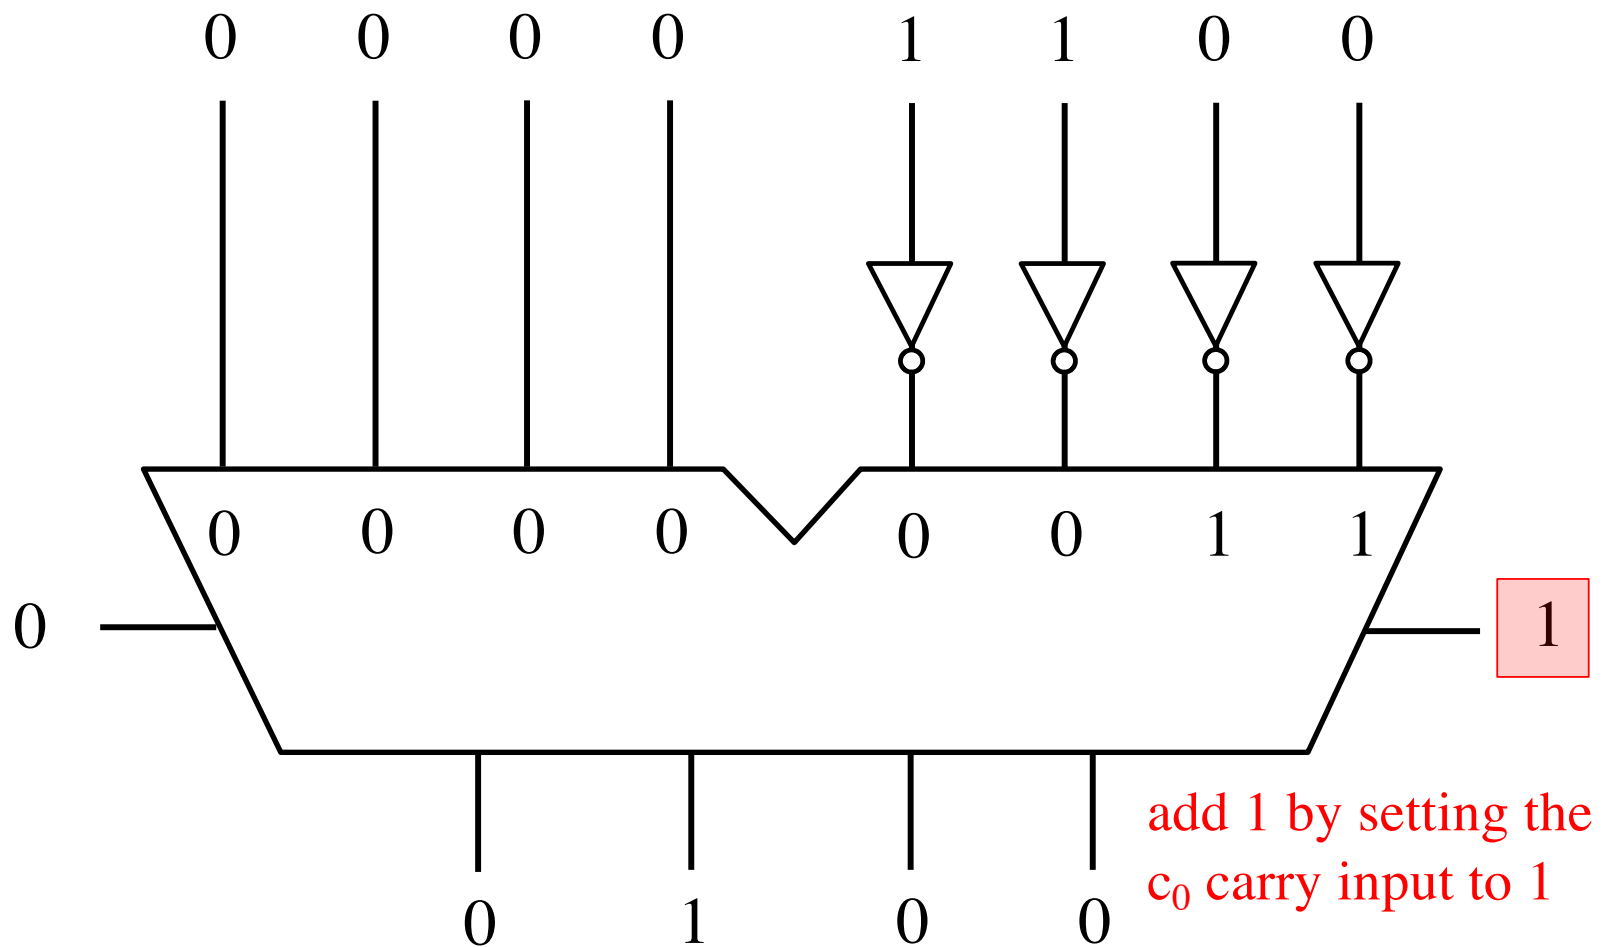

Addition of two numbers stored in 2's complement representation

There are four cases to consider

a) $(+5) + (+2)$

b) $(-5) + (+2)$

c) $(+5) + (-2)$

d) $(-5) + (-2)$

There are four cases to consider

a) $(+5) + (+2)$ positive plus positive

b) $(-5) + (+2)$ negative plus positive

c) $(+5) + (-2)$ positive plus negative

d) $(-5) + (-2)$ negative plus negative

A) Example of 2' s complement addition

$$\begin{array}{r}
 (+5) \\
 + (+2) \\
 \hline
 (+7)
 \end{array}
 \qquad
 \begin{array}{r}
 0101 \\
 + 0010 \\
 \hline
 0111
 \end{array}$$

$b_3b_2b_1b_0$	2's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-8
1001	-7
1010	-6
1011	-5
1100	-4
1101	-3
1110	-2
1111	-1

[Figure 3.9 from the textbook]

B) Example of 2' s complement addition

$$\begin{array}{r}
 (-5) \\
 + (+2) \\
 \hline
 (-3)
 \end{array}
 \qquad
 \begin{array}{r}
 \textcolor{red}{1011} \\
 + \textcolor{green}{0010} \\
 \hline
 \textcolor{blue}{1101}
 \end{array}$$

$b_3b_2b_1b_0$	2's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-8
1001	-7
1010	-6
1011	-5
1100	-4
1101	-3
1110	-2
1111	-1

[Figure 3.9 from the textbook]

C) Example of 2' s complement addition

$$\begin{array}{r}
 (+5) \\
 + (-2) \\
 \hline
 (+3)
 \end{array}
 \qquad
 \begin{array}{r}
 0101 \\
 + 1110 \\
 \hline
 10011
 \end{array}$$


 ignore

$b_3b_2b_1b_0$	2's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-8
1001	-7
1010	-6
1011	-5
1100	-4
1101	-3
1110	-2
1111	-1

[Figure 3.9 from the textbook]

D) Example of 2' s complement addition

$$\begin{array}{r}
 (-5) \\
 + (-2) \\
 \hline
 (-7)
 \end{array}
 \qquad
 \begin{array}{r}
 1011 \\
 + 1110 \\
 \hline
 11001
 \end{array}$$


 ignore

$b_3b_2b_1b_0$	2's complement
0111	+7
0110	+6
0101	+5
0100	+4
0011	+3
0010	+2
0001	+1
0000	+0
1000	-8
1001	-7
1010	-6
1011	-5
1100	-4
1101	-3
1110	-2
1111	-1

[Figure 3.9 from the textbook]

Naming Ambiguity: 2's Complement

2's complement has two different meanings:

- **representation for signed integer numbers**
- **algorithm for computing the 2's complement
(regardless of the representation of the number)**

Naming Ambiguity: 2's Complement

2's complement has two different meanings:

- representation for signed integer numbers
in 2's complement
- algorithm for computing the 2's complement
(regardless of the representation of the number)
take the 2's complement (or negate)

Taking the 2' s complement negates the number

decimal	b ₃ b ₂ b ₁ b ₀	take the 2's complement	b ₃ b ₂ b ₁ b ₀	decimal
+7	0111	⇒	1001	-7
+6	0110	⇒	1010	-6
+5	0101	⇒	1011	-5
+4	0100	⇒	1100	-4
+3	0011	⇒	1101	-3
+2	0010	⇒	1110	-2
+1	0001	⇒	1111	-1
+0	0000	⇒	0000	+0
-8	1000	⇒	1000	-8
-7	1001	⇒	0111	+7
-6	1010	⇒	0110	+6
-5	1011	⇒	0101	+5
-4	1100	⇒	0100	+4
-3	1101	⇒	0011	+3
-2	1110	⇒	0010	+2
-1	1111	⇒	0001	+1

Taking the 2' s complement negates the number

decimal	b ₃ b ₂ b ₁ b ₀	take the 2's complement	b ₃ b ₂ b ₁ b ₀	decimal
+7	0111	⇒	1001	-7
+6	0110	⇒	1010	-6
+5	0101	⇒	1011	-5
+4	0100	⇒	1100	-4
+3	0011	⇒	1101	-3
+2	0010	⇒	1110	-2
+1	0001	⇒	1111	-1
+0	0000	⇒	0000	+0
-8	1000	⇒	1000	-8
-7	1001	⇒	0111	+7
-6	1010	⇒	0110	+6
-5	1011	⇒	0101	+5
-4	1100	⇒	0100	+4
-3	1101	⇒	0011	+3
-2	1110	⇒	0010	+2
-1	1111	⇒	0001	+1

This is an exception

Taking the 2' s complement negates the number

decimal	b ₃ b ₂ b ₁ b ₀	take the 2's complement	b ₃ b ₂ b ₁ b ₀	decimal
+7	0111	⇒	1001	-7
+6	0110	⇒	1010	-6
+5	0101	⇒	1011	-5
+4	0100	⇒	1100	-4
+3	0011	⇒	1101	-3
+2	0010	⇒	1110	-2
+1	0001	⇒	1111	-1
+0	0000	⇒	0000	+0
-8	1000	⇒	1000	-8
-7	1001	⇒	0111	+7
-6	1010	⇒	0110	+6
-5	1011	⇒	0101	+5
-4	1100	⇒	0100	+4
-3	1101	⇒	0011	+3
-2	1110	⇒	0010	+2
-1	1111	⇒	0001	+1


And this one too.

But that exception does not matter


$$\begin{array}{r} (-5) \\ - (-8) \\ \hline (+3) \end{array} \quad \begin{array}{r} 1011 \\ - 1000 \\ \hline \end{array} \Rightarrow \begin{array}{r} 1011 \\ + 1000 \\ \hline 10011 \end{array}$$

↑
ignore

But that exception does not matter

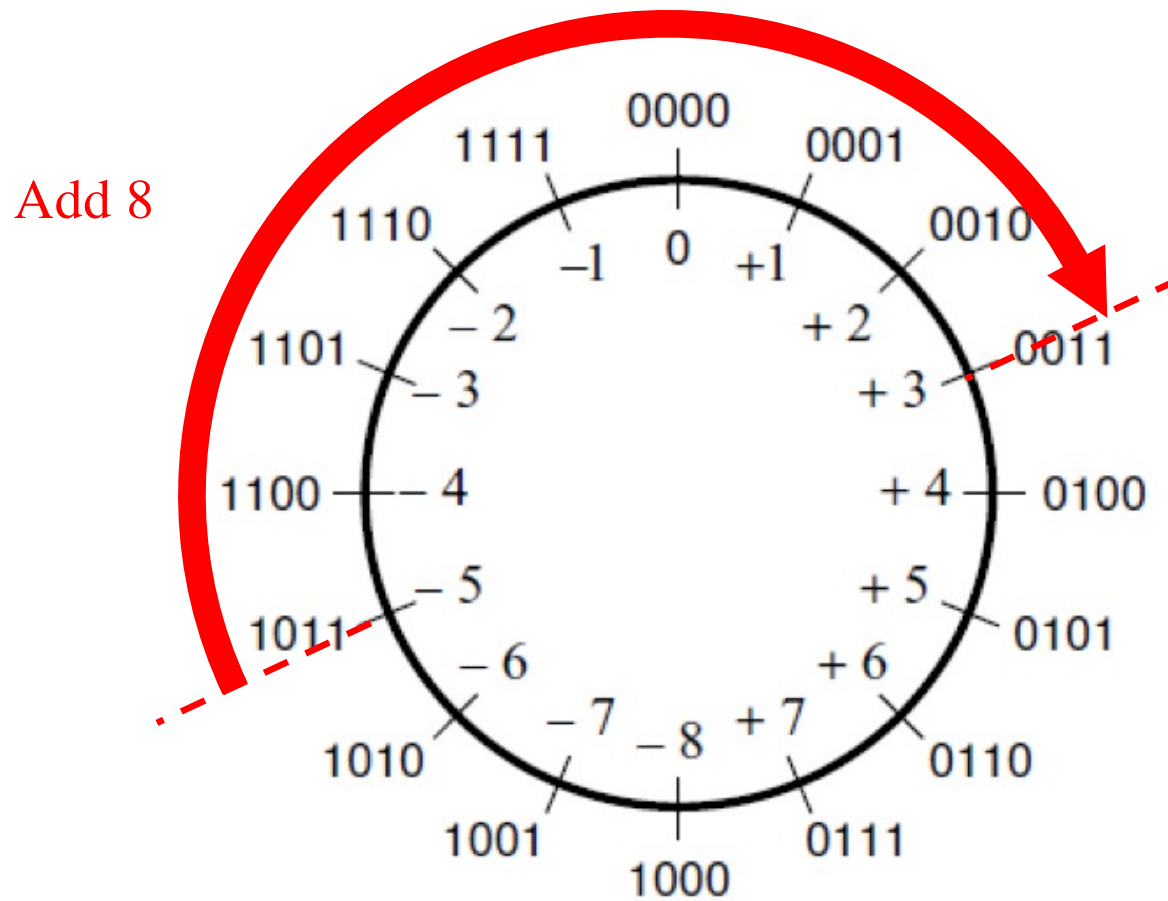

But that exception does not matter

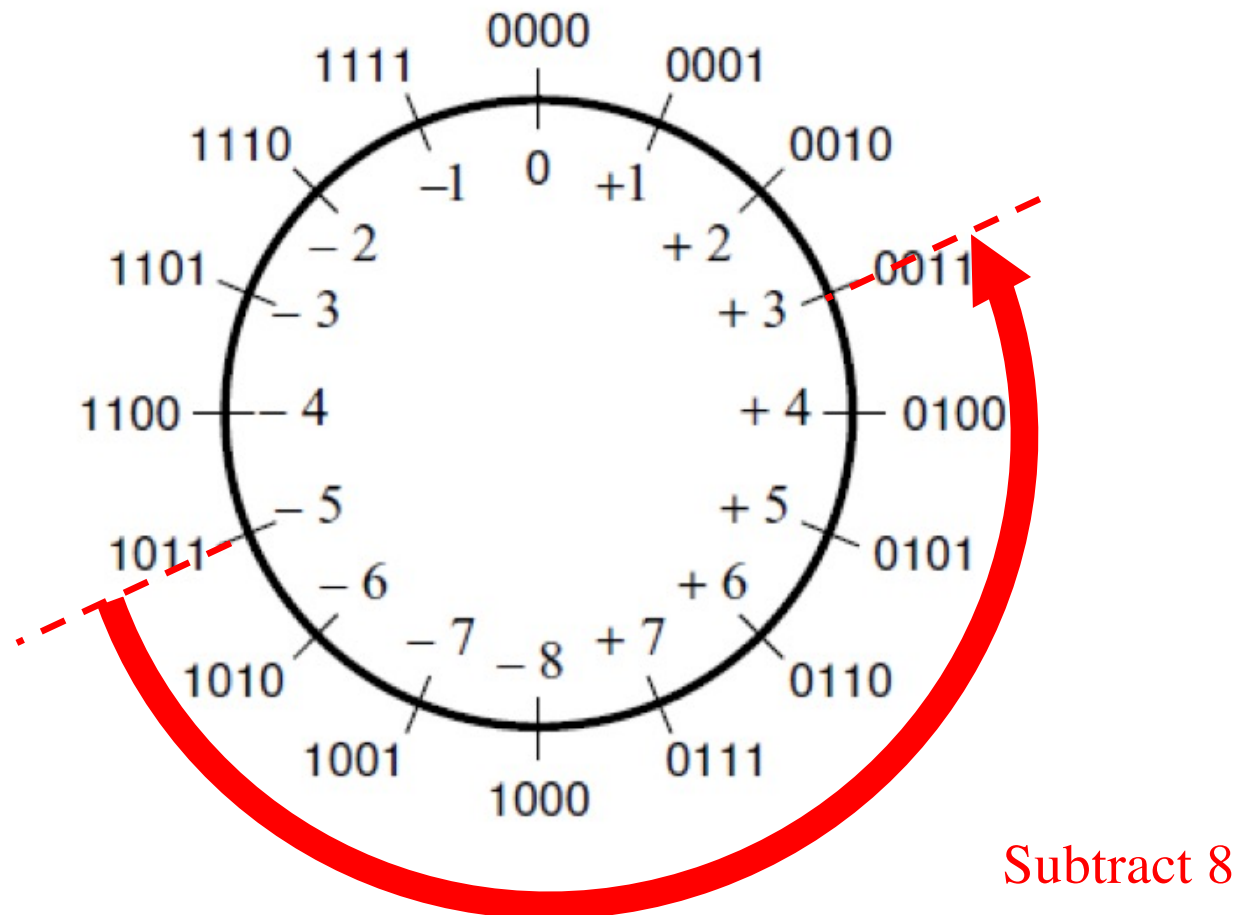

Questions?

THE END


Additional Material

Alternative Circuit #3 (not used in practice)


A former student came up with this
circuit during a midterm exam!

Alternative Circuit #3 (not used in practice)

Circuit #3 for negating a number stored in 2's complement representation

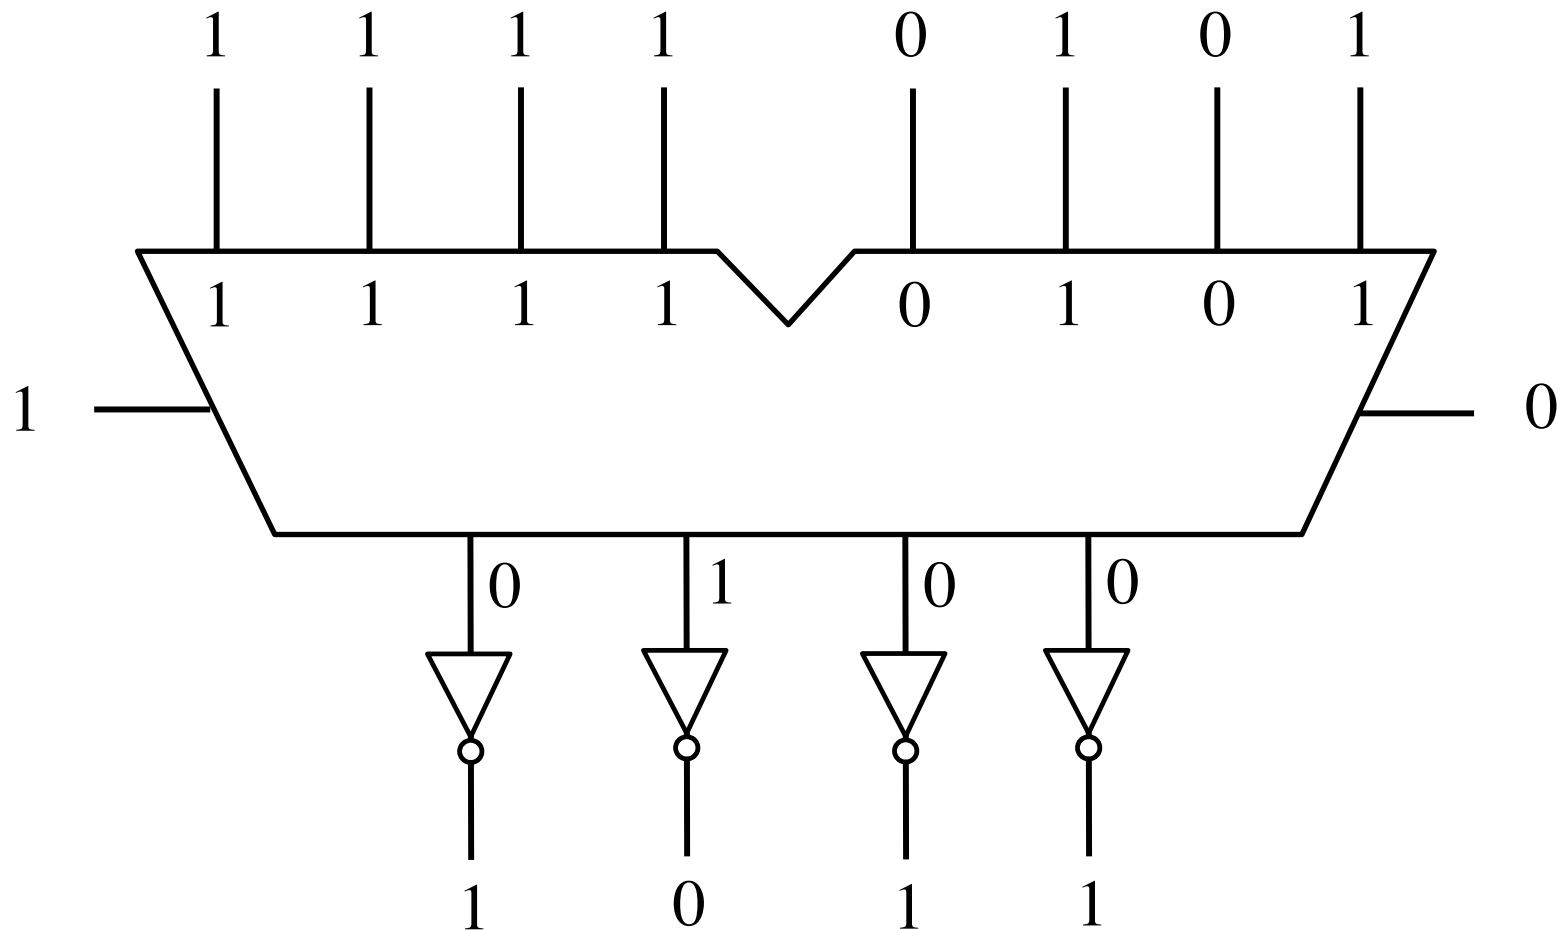


Circuit #3 for negating a number stored in 2's complement representation

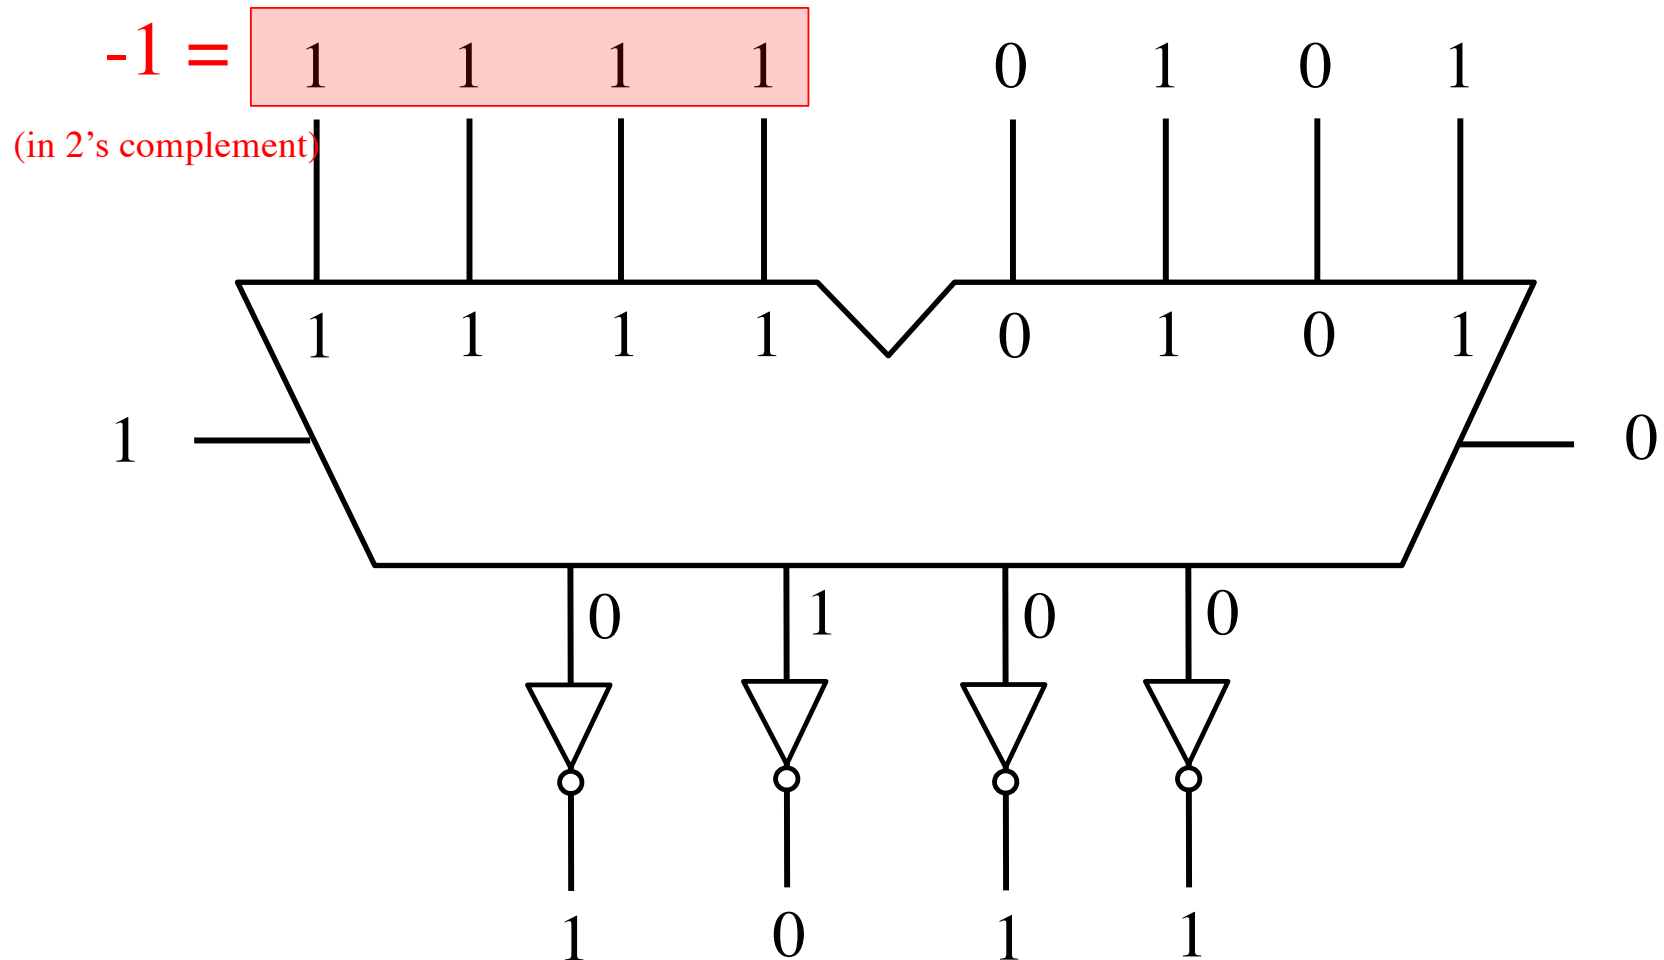


Circuit #3 for negating a number stored in 2's complement representation


(in 2's complement)

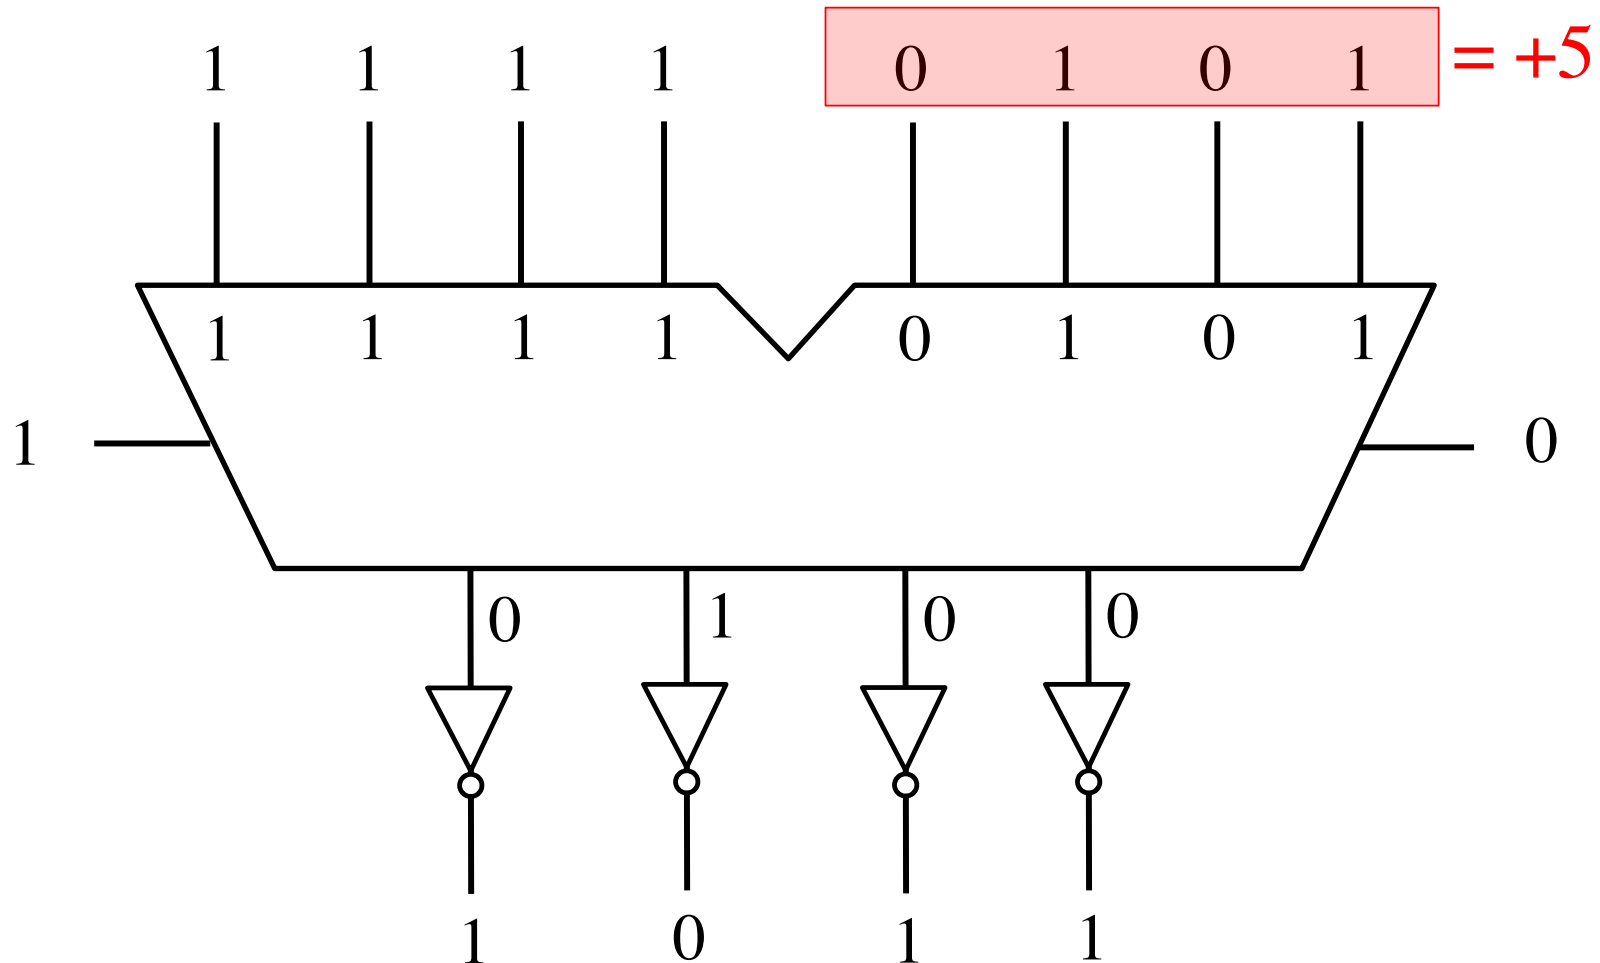


Circuit #3 for negating a number stored in 2's complement representation

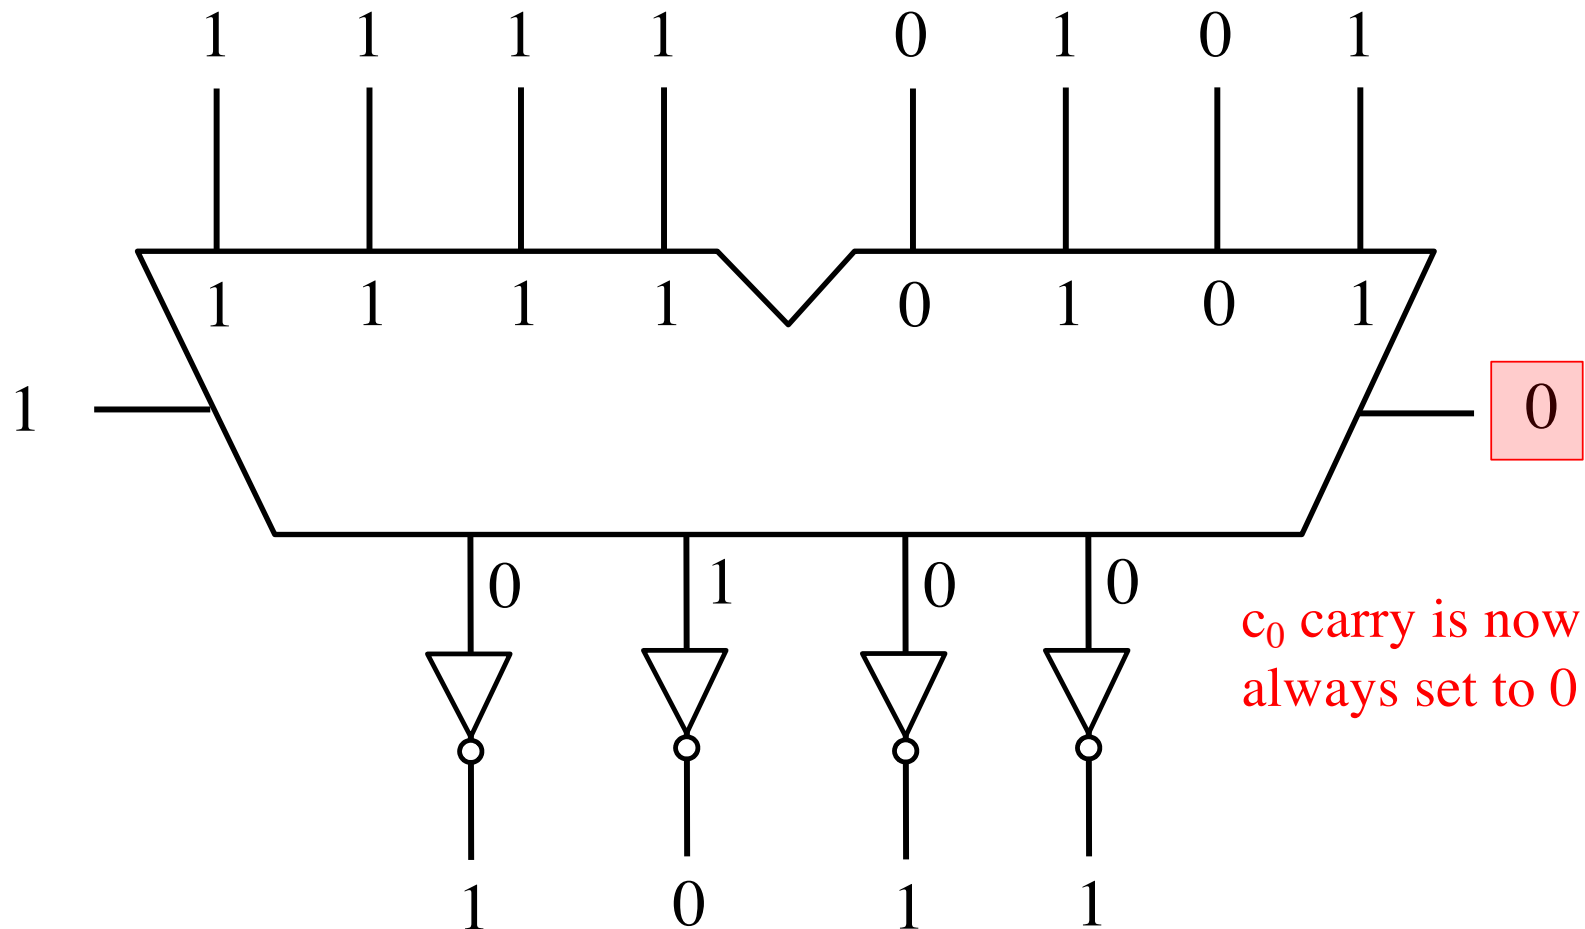


Circuit #3 for negating a number stored in 2's complement representation

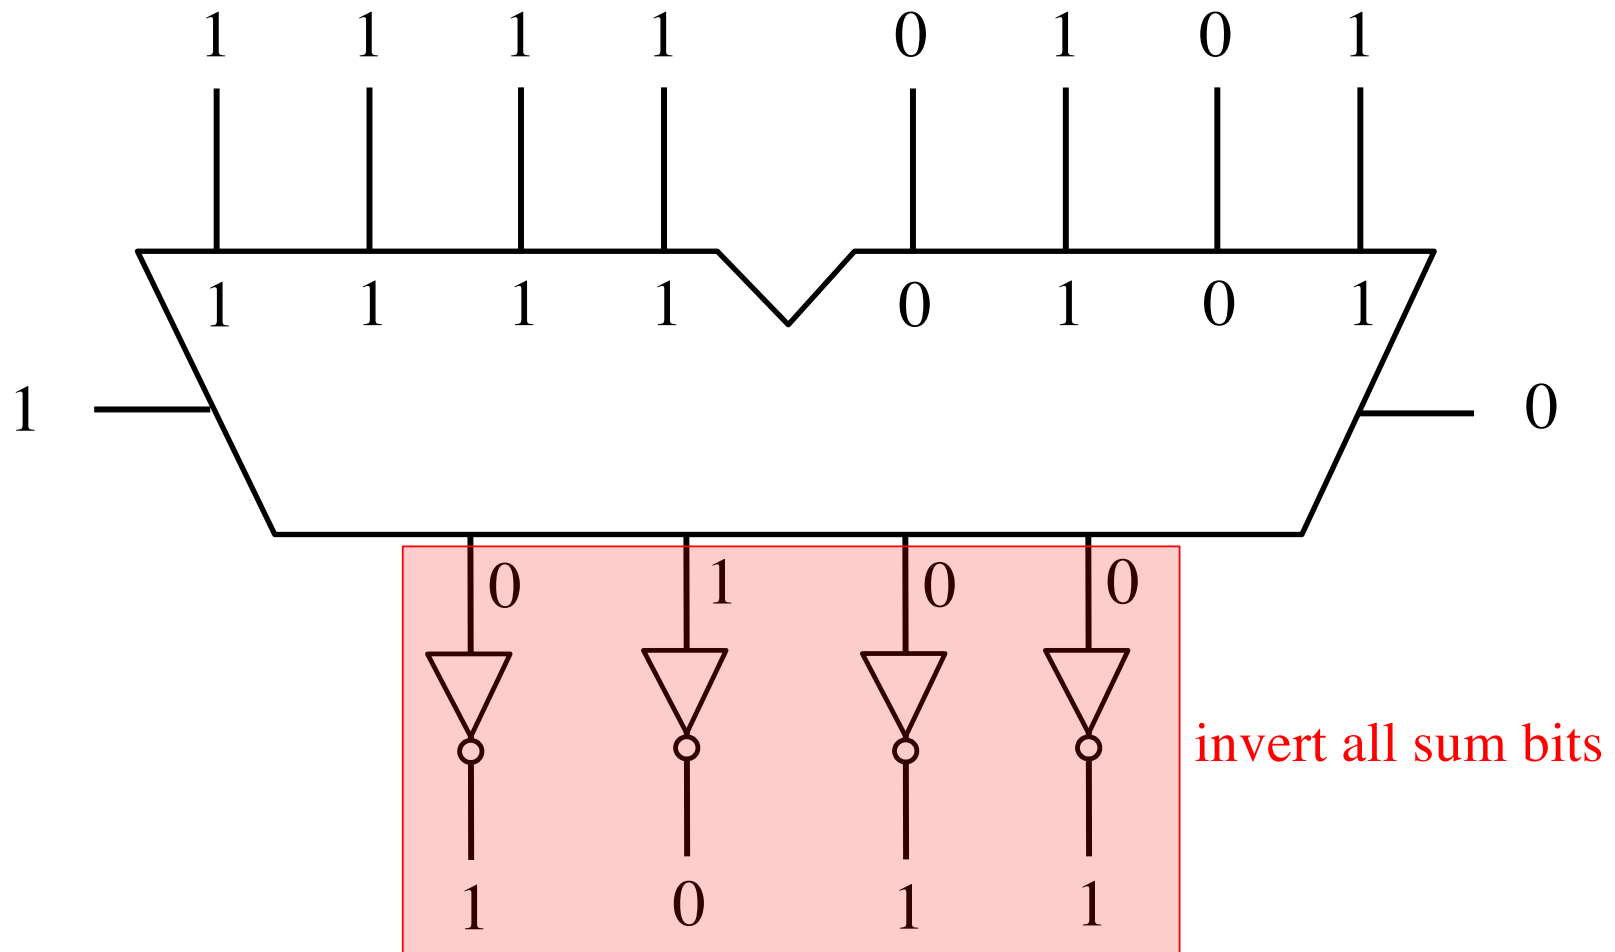


Circuit #3 for negating a number stored in 2's complement representation

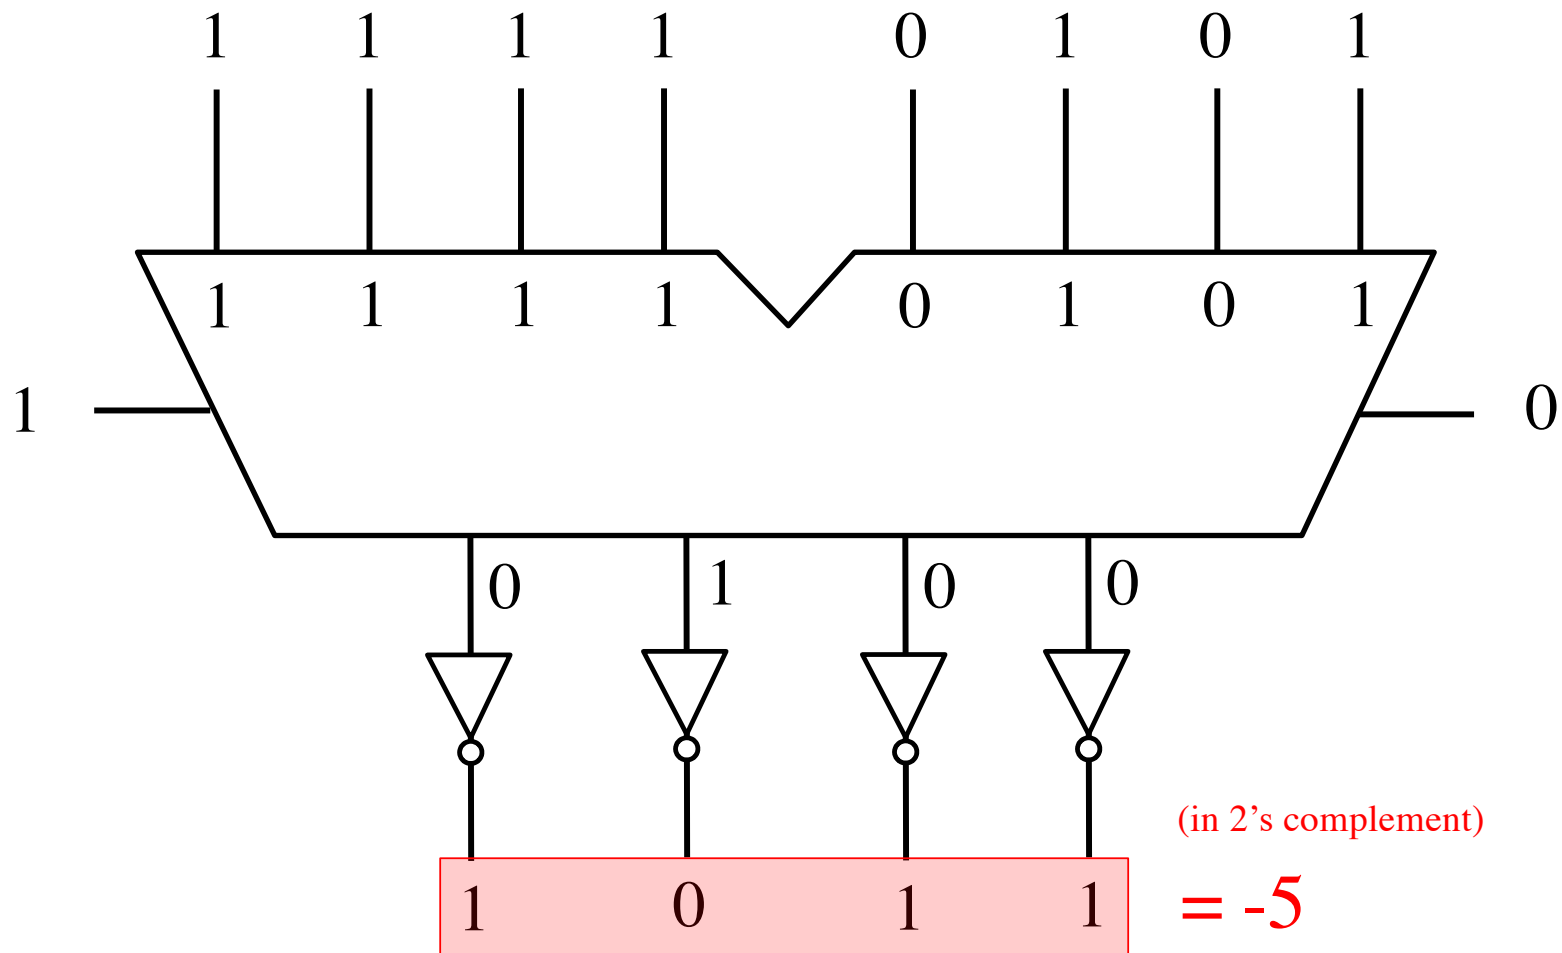

The number circle for 2's complement

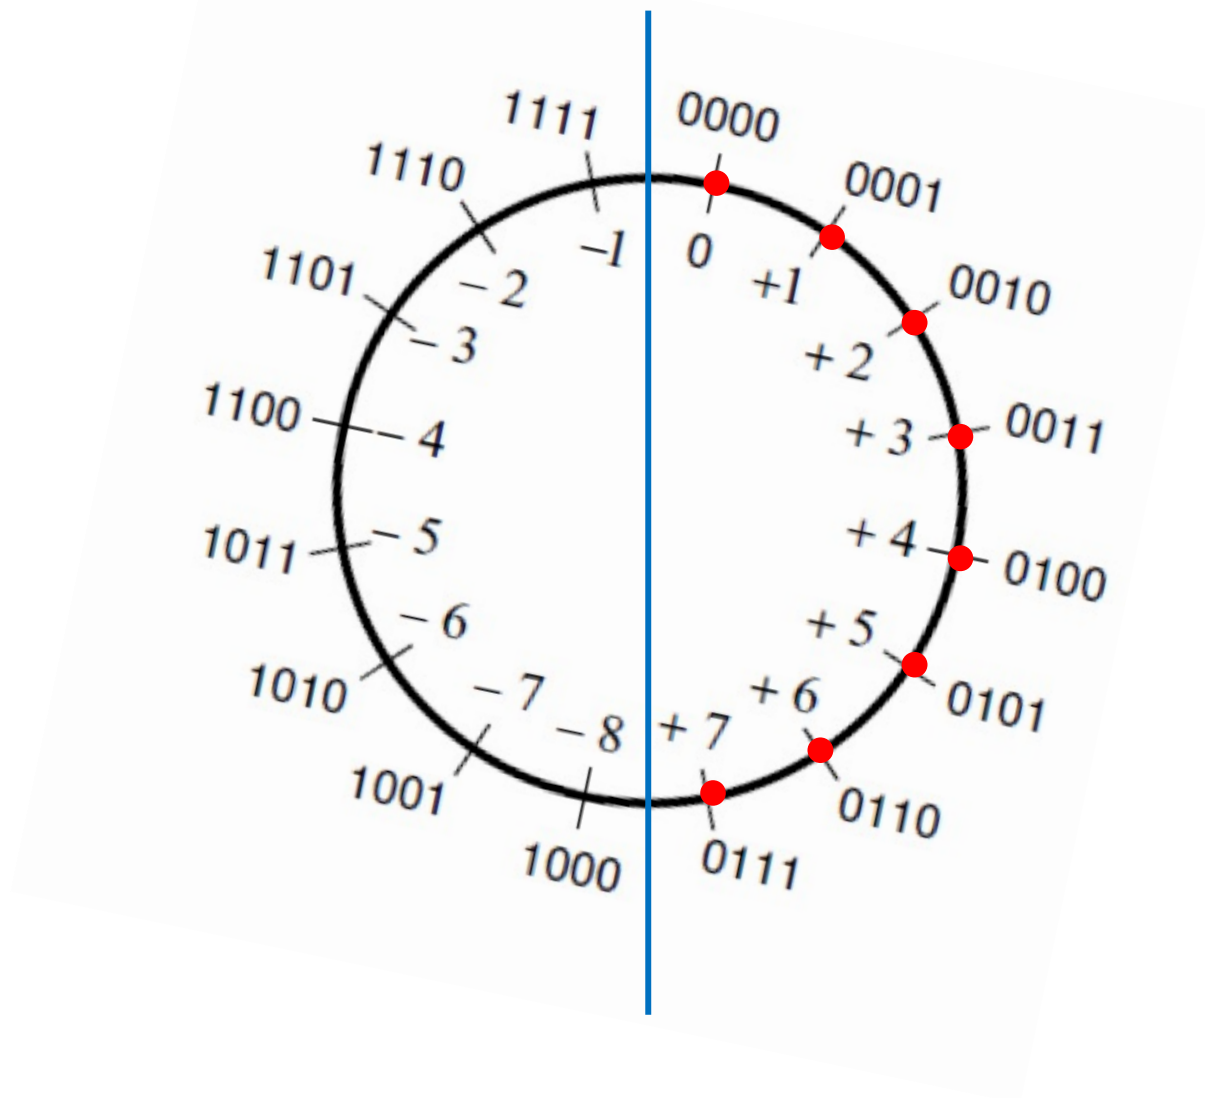


The number circle for 2's complement

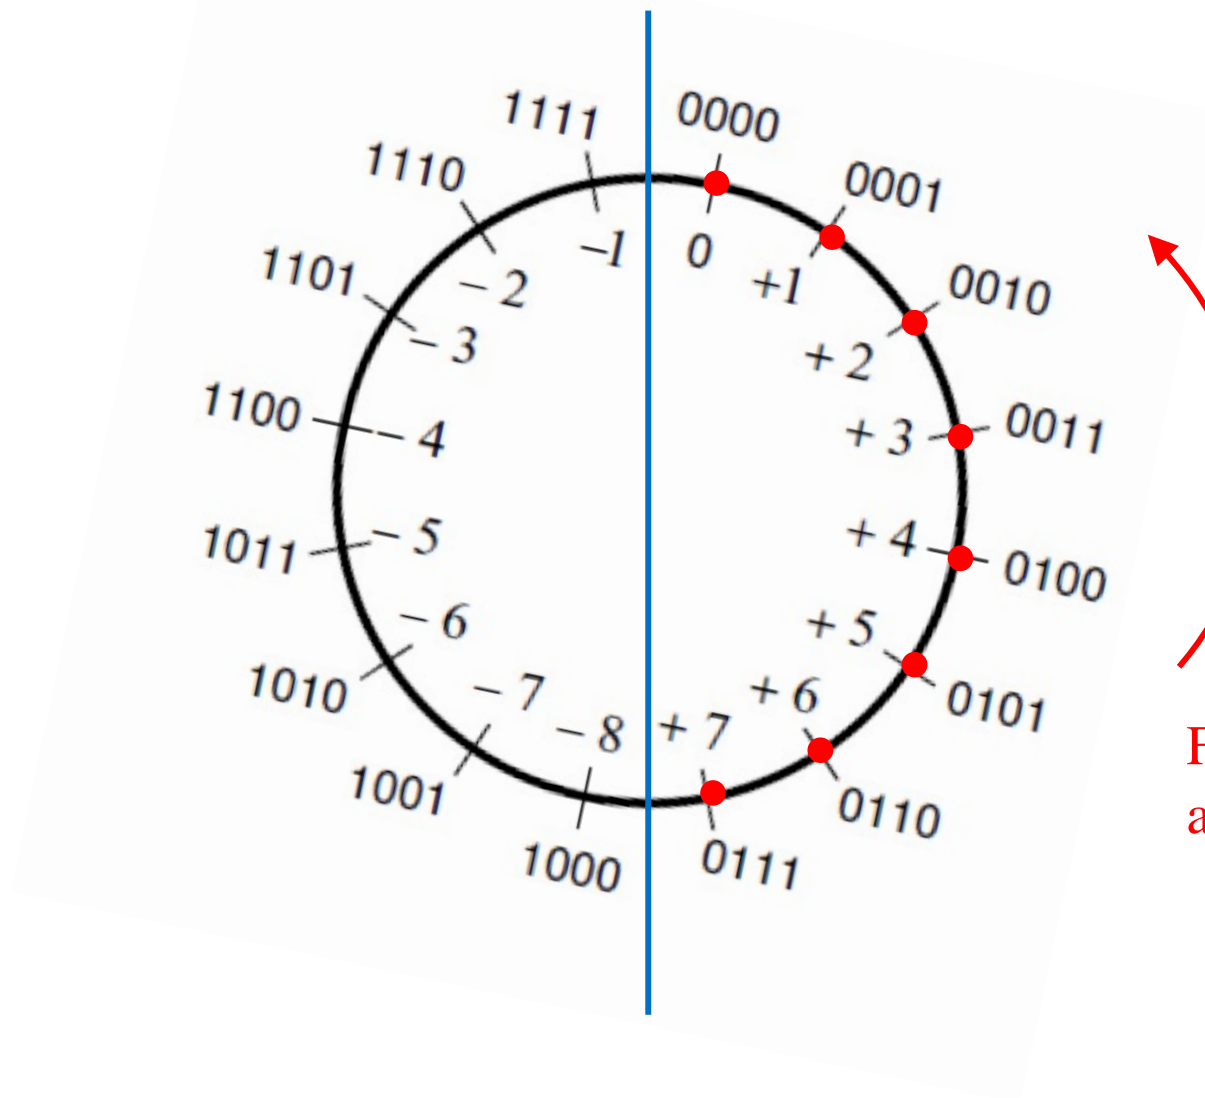


First,
add (-1) ...

The number circle for 2's complement

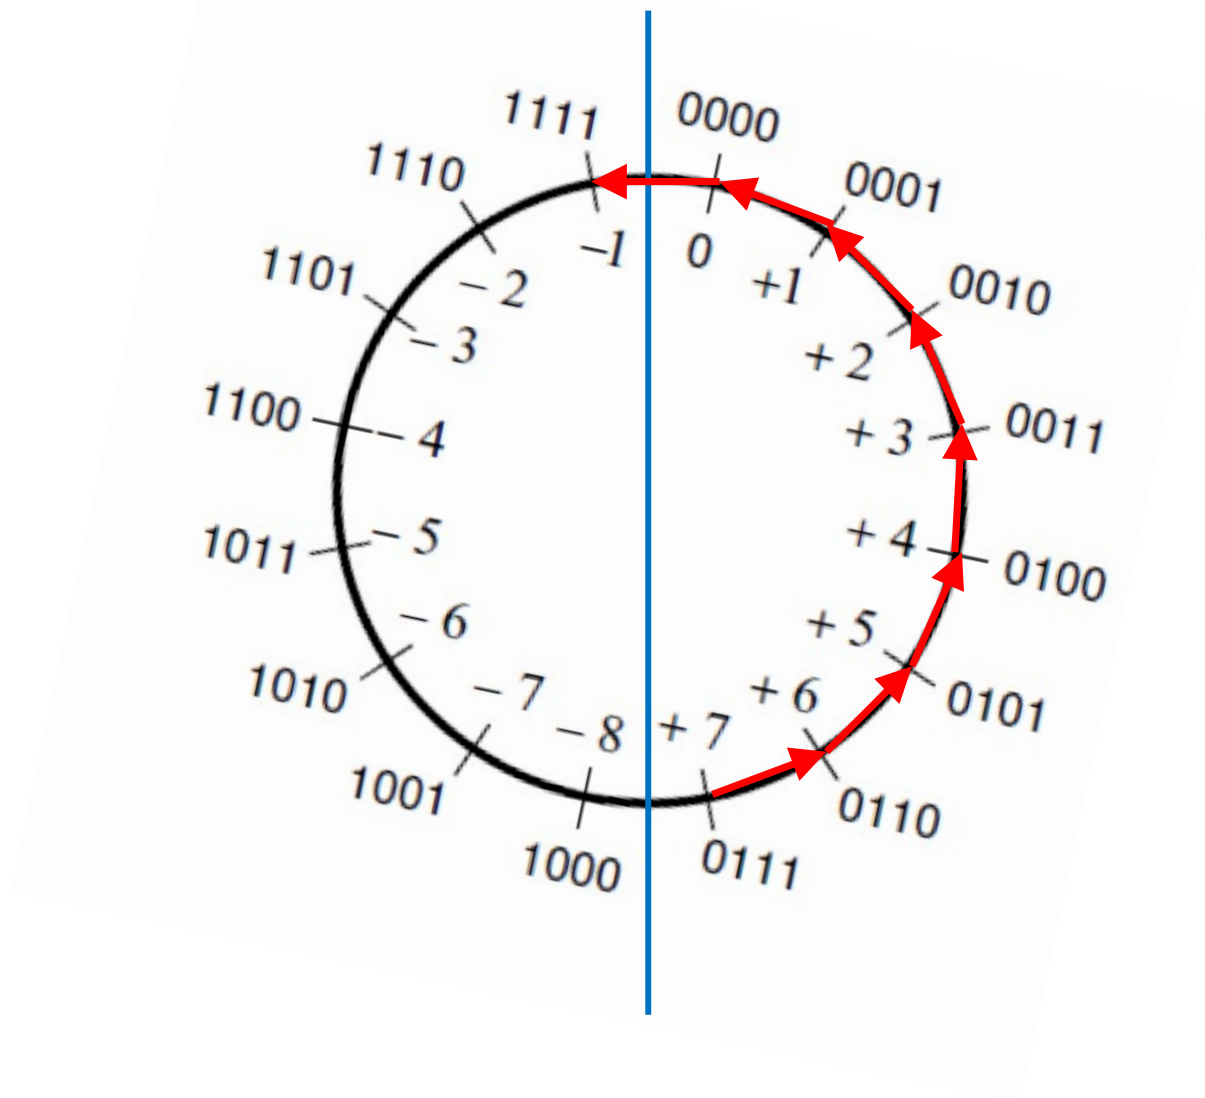


The number circle for 2's complement

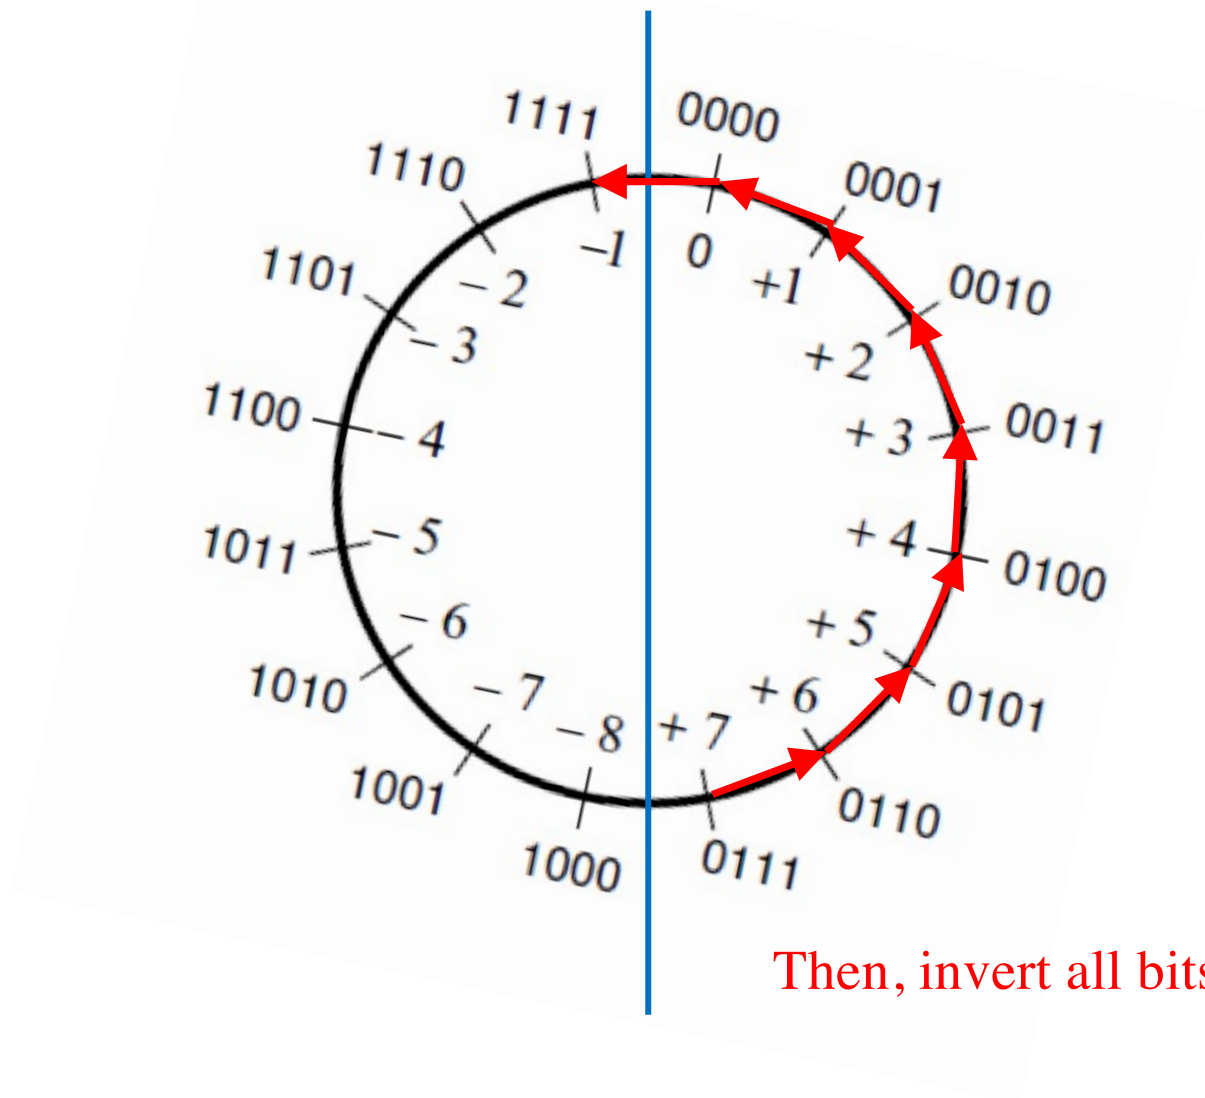


Then, invert all bits ...


The number circle for 2's complement

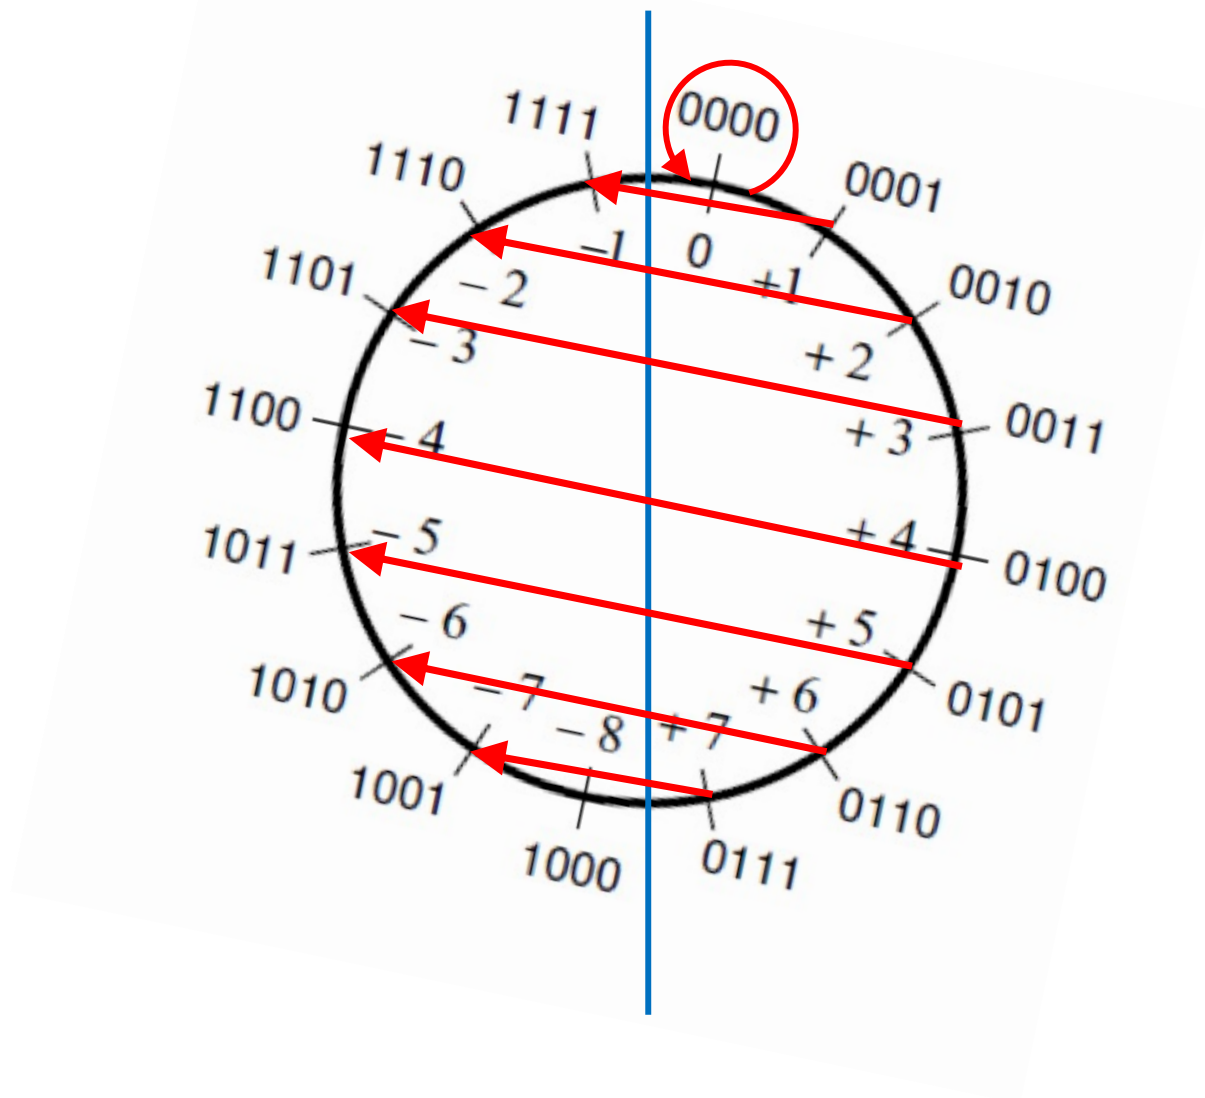

Circuit #3 for negating a number stored in 2's complement representation

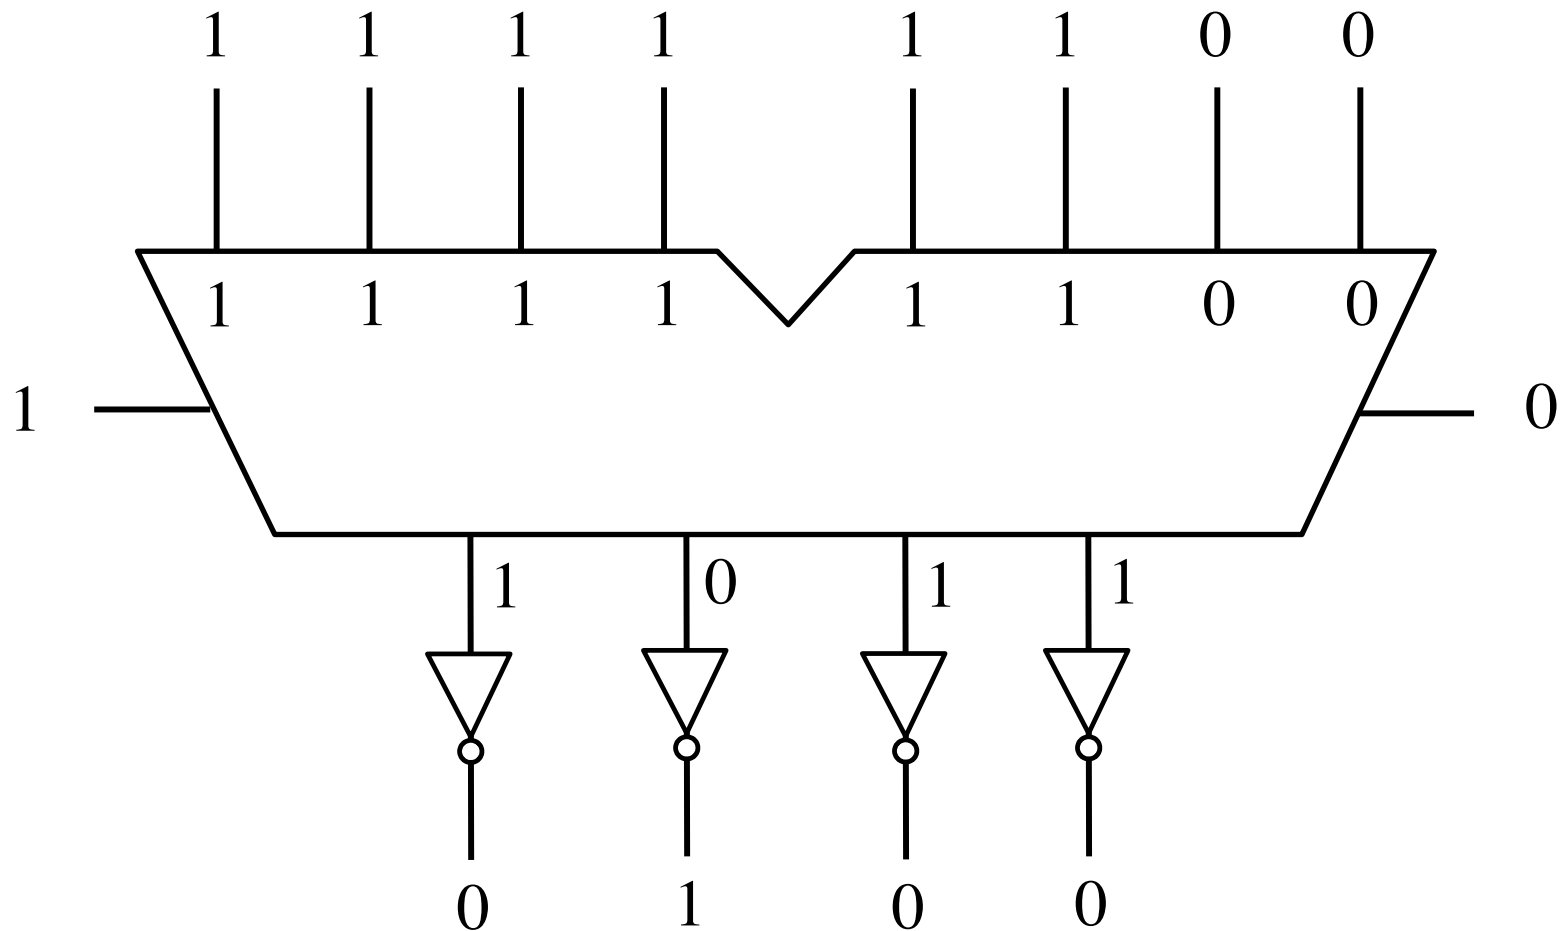


Circuit #3 for negating a number stored in 2's complement representation

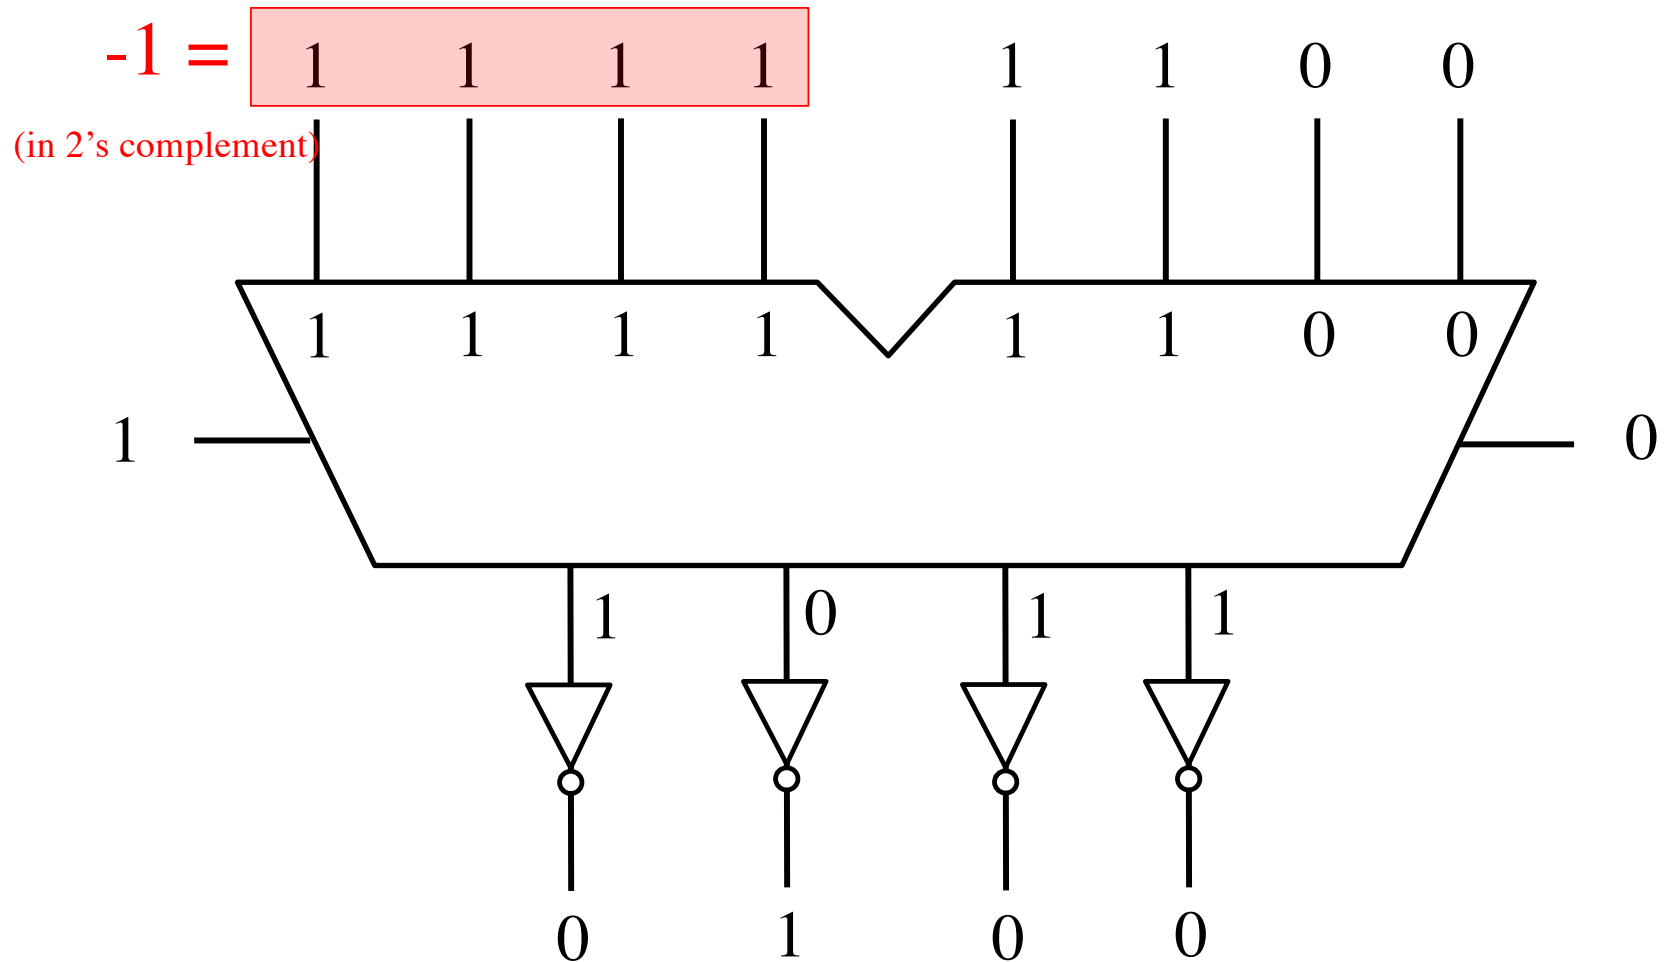


Circuit #3 for negating a number stored in 2's complement representation


(in 2's complement)

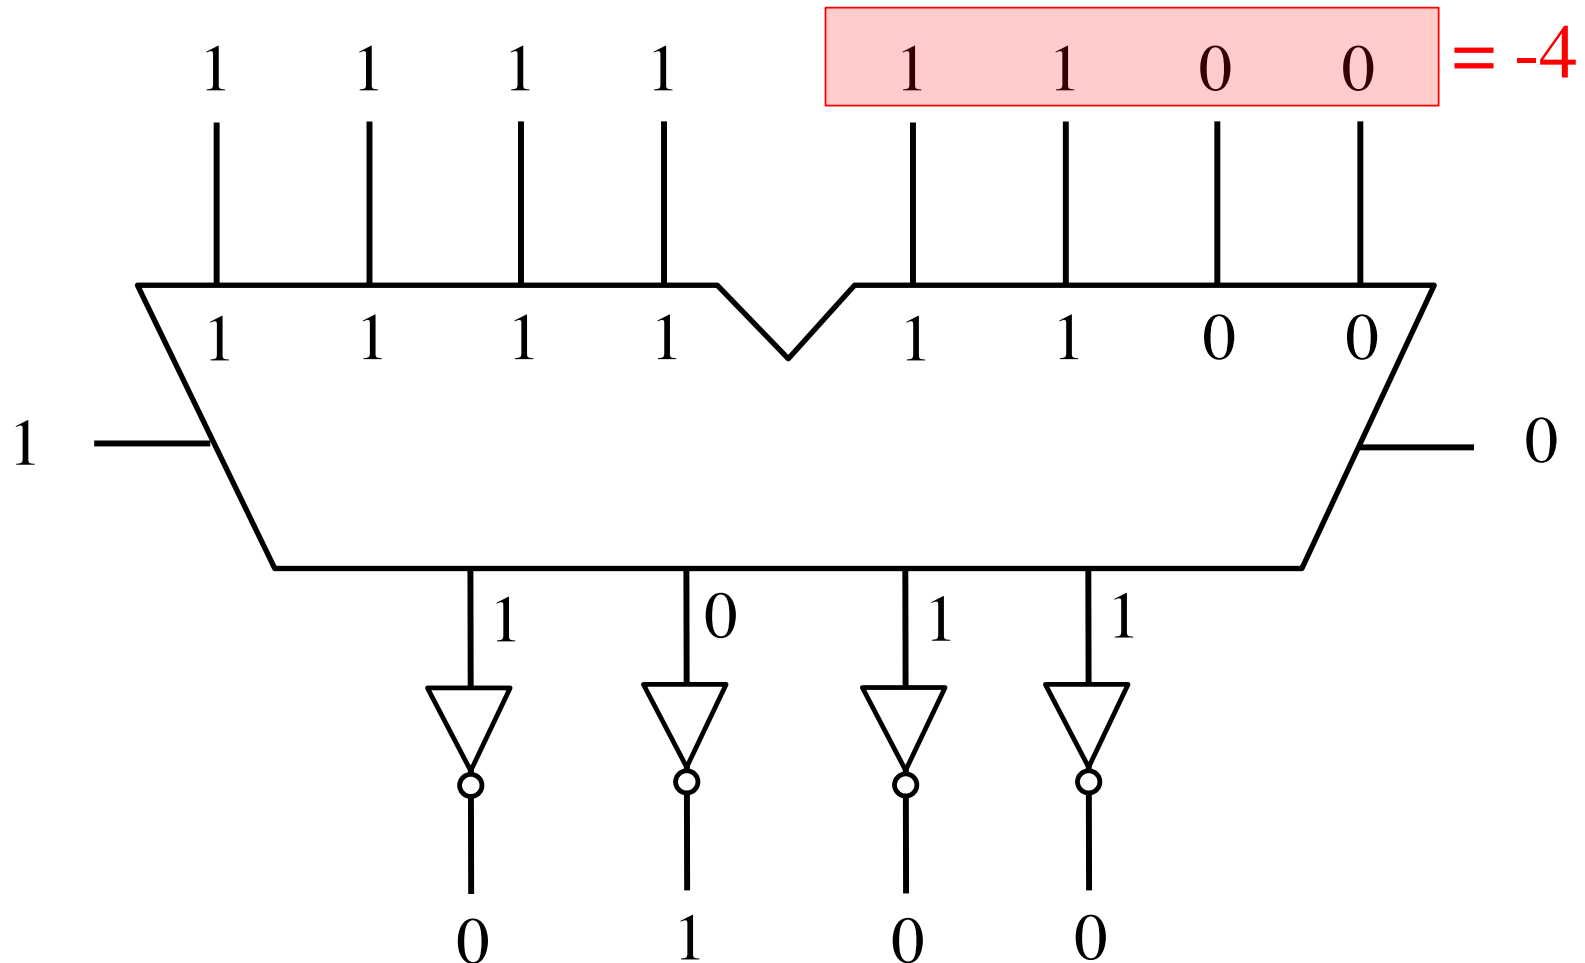


Circuit #3 for negating a number stored in 2's complement representation

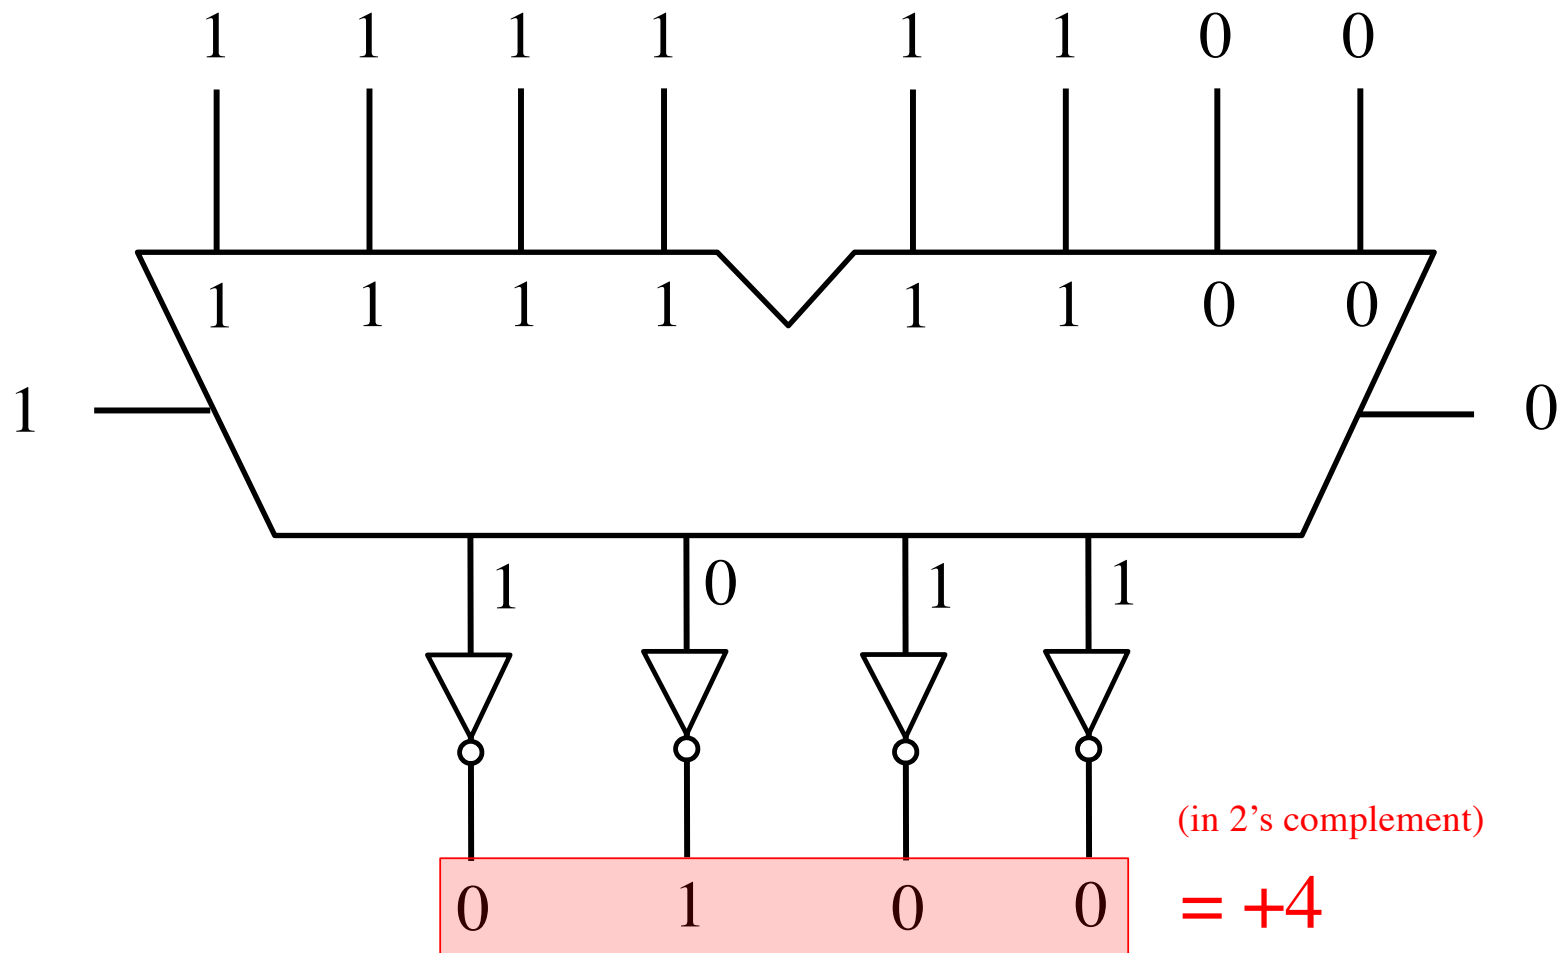


The number circle for 2's complement

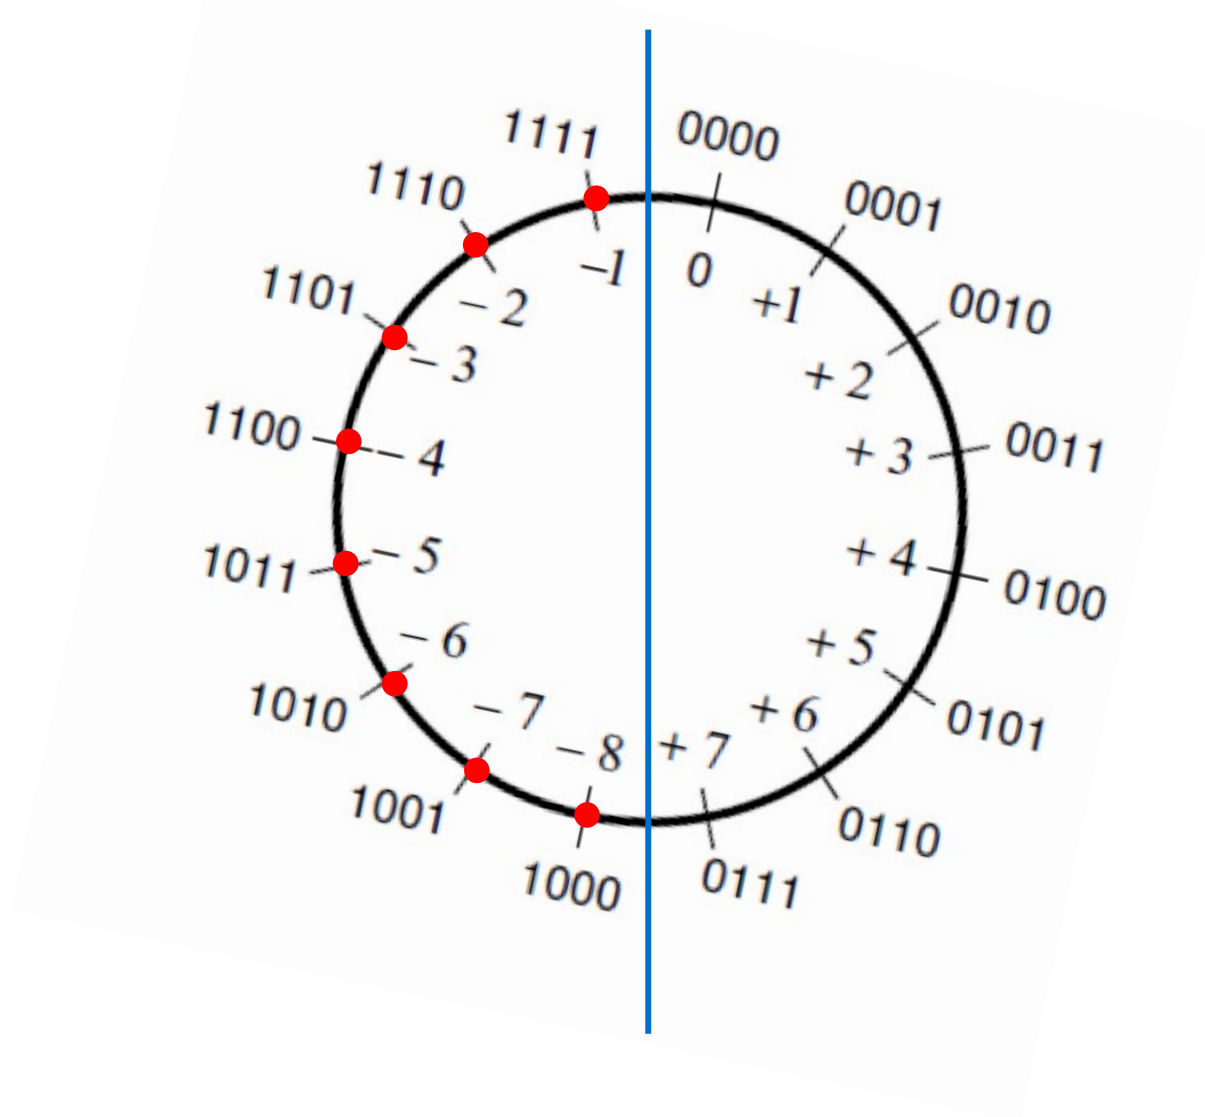

The number circle for 2's complement

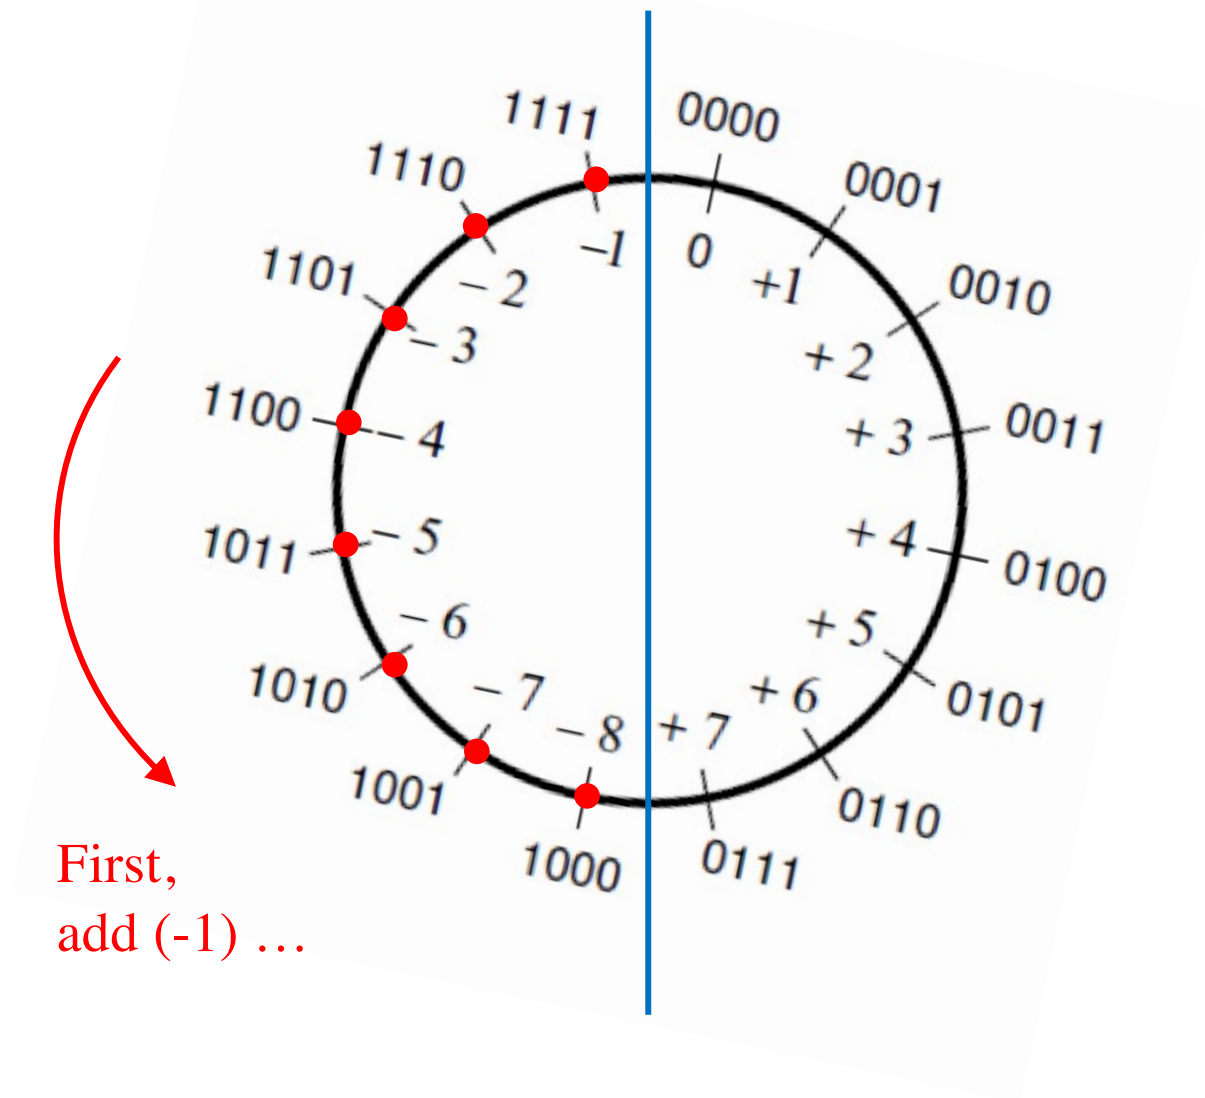

The number circle for 2's complement

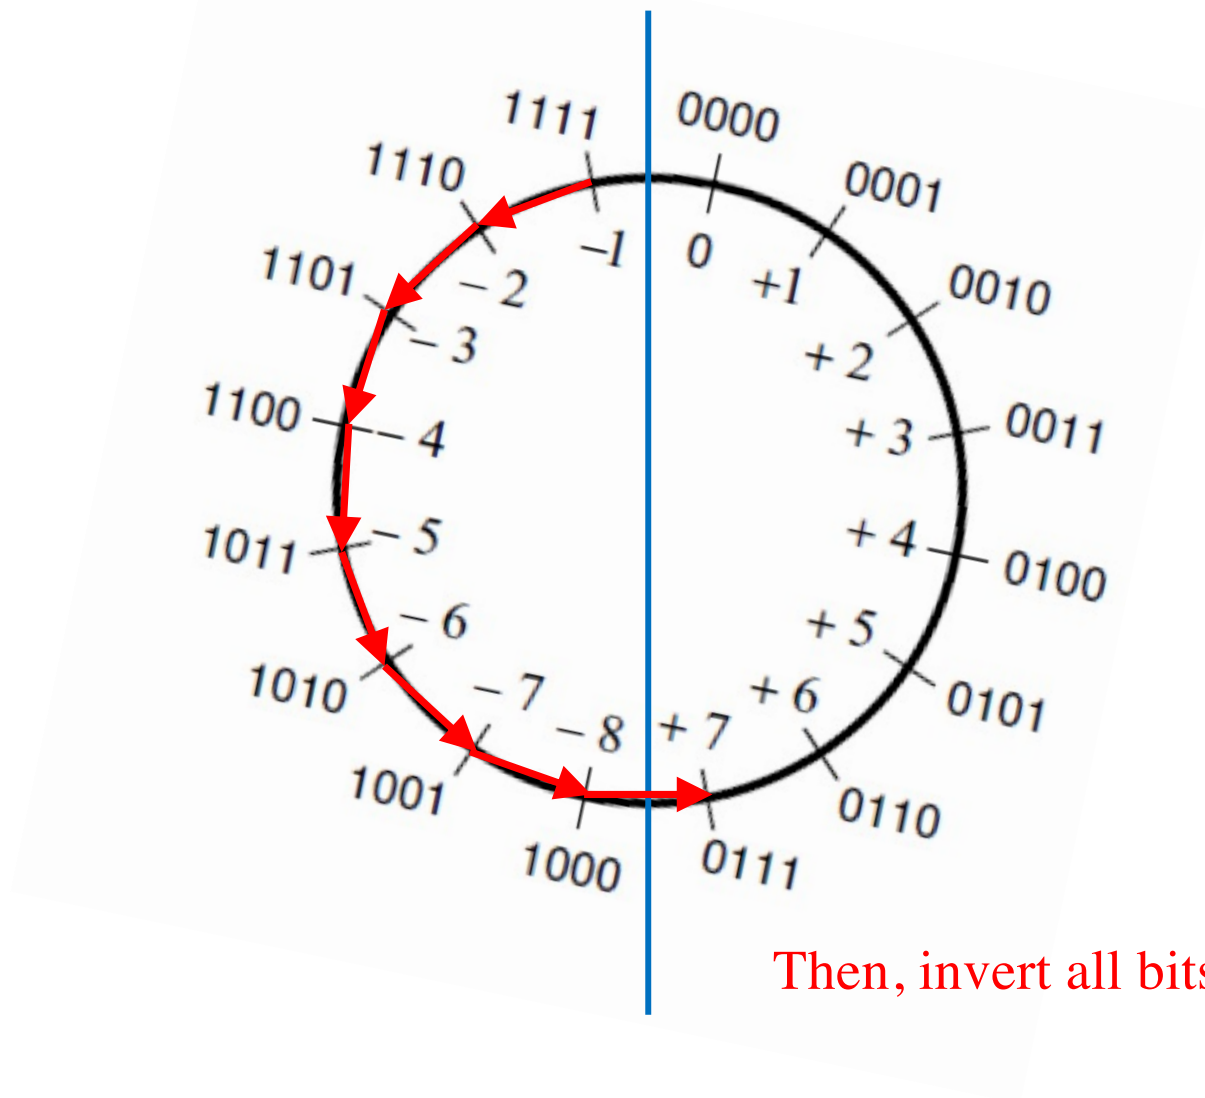

Then, invert all bits ...

The number circle for 2's complement

